



U.S. DEPARTMENT OF ENERGY

OFFICE OF FOSSIL ENERGY • NATIONAL ENERGY TECHNOLOGY LABORATORY

# HYDROGEN *from* COAL PROGRAM

## RESEARCH, DEVELOPMENT, AND DEMONSTRATION PLAN

FOR THE PERIOD 2009 THROUGH 2016

EXTERNAL DRAFT

SEPTEMBER 2009



SECURING  
OUR  
ENERGY FUTURE



## Table of Contents

Executive Summary .....	iii
1. Introduction .....	1
2. Hydrogen from Coal Program – Mission and Goals .....	3
3. Technical Discussion .....	4
3.1. Current Technology .....	4
3.2. Comparison of Current and Future Technology .....	6
4. Technical Plan .....	11
4.1. Central Production Pathway .....	16
4.1.1. Goal and Milestones – Central Production Pathway .....	16
4.1.2. Activities – Central Production Pathway .....	17
4.1.3. Technologies – Central Production Pathway .....	17
4.1.3.1. Advanced WGS Reaction Systems .....	18
4.1.3.2. Advanced Membrane Separation Systems .....	20
4.1.3.3. Reverse Selective Hydrogen Separation Systems .....	24
4.1.3.4. Polishing Filters (Ultra-clean Hydrogen Purification Systems) .....	25
4.1.3.5. Advanced Adsorption/Solvent Systems .....	25
4.1.3.6. Advanced Concepts .....	25
4.1.3.7. Delivery & Infrastructure for Hydrogen from Coal Central Production Facilities .....	26
4.1.4. Technical Targets – Central Production Pathway .....	31
4.1.4.1. WGS Reaction Technical Targets .....	33
4.1.4.2. Hydrogen Separation Technical Targets .....	33
4.1.4.3. Advanced Polishing Filter Technical Targets .....	35
4.1.5. Technical Barriers – Central Production Pathway .....	36
4.1.5.1. Barriers .....	36
4.1.5.2. WGS Reaction Barriers .....	36
4.1.5.3. Hydrogen Separation Barriers .....	37
4.1.6. Technical Task Descriptions – Central Production Pathway .....	39
4.2. Alternate Hydrogen Production Pathway .....	40
4.2.1. Goal and Milestones – Alternate Hydrogen Production Pathway .....	40
4.2.2. Activities – Alternate Hydrogen Production Pathway .....	41
4.2.3. Technologies – Alternate Hydrogen Production Pathway .....	43
4.2.3.1. Liquid Fuels Production .....	43
4.2.3.2. SNG Production .....	43
4.2.3.3. Fuels Reforming at Distributed Production Facilities .....	43
4.2.4. Technical Targets – Alternate Hydrogen Production Pathway .....	43
4.2.4.1. Hydrogen-Rich Liquids Production and Conversion via Reforming .....	43
4.2.4.2. SNG Production and Conversion via Reforming .....	45
4.2.5. Technical Barriers – Alternate Hydrogen Production Pathway .....	46
4.2.5.1. General Barriers .....	46
4.2.5.2. Liquid Fuels and SNG Production, Delivery, and Conversion via Reforming Barriers .....	47
4.2.6. Technical Task Descriptions – Alternate Hydrogen Production Pathway .....	48
4.3. Polygeneration .....	49
4.3.1. Goals and Milestones – Polygeneration .....	49
4.3.2. Activities – Polygeneration .....	49
4.3.3. Technologies – Polygeneration .....	50
4.3.3.1. High-value Carbon Products .....	50
4.3.3.2. Cokes and Pitches .....	50

4.3.3.3.	Chemicals .....	51
4.4.	Storage.....	51
4.5.	Utilization.....	52
4.5.1.	Goal and Milestones – Utilization .....	52
4.5.2.	Activities – Utilization .....	53
4.5.3.	Technologies – Utilization.....	53
4.5.3.1.	Advanced Engine Types.....	53
4.5.4.	Technical Guidelines – Utilization .....	53
4.5.5.	Technical Barriers – Utilization.....	55
4.5.6.	Technical Task Descriptions – Utilization.....	55
<b>5.</b>	<b>Implementation Plan .....</b>	<b>56</b>
5.1.	Coordination with Other DOE/Federal Programs (Associated Programs): Jointly Funded Projects 56	
5.1.1.	Other Coordination Activities.....	56
5.1.1.1.	Overall DOE Hydrogen Program .....	57
5.1.1.2.	Hydrogen and Fuel Cell Interagency Task Force .....	57
5.1.1.3.	International Partnership for the Hydrogen Economy (IPHE) .....	58
5.2.	Performance Assessment and Peer Reviews .....	58
5.3.	Accomplishments and Progress .....	59
5.3.1.	Technical Progress .....	59
5.3.1.1.	Central Hydrogen Production Pathway .....	59
5.3.1.2.	Alternate Hydrogen Production Pathways.....	61
5.3.1.3.	Systems Engineering .....	62
5.4.	Communications, Outreach, and Technology Transfer.....	63
5.5.	Next Steps .....	63
<b>6.</b>	<b>Appendix.....</b>	<b>64</b>
6.1.	Acronyms .....	64
6.2.	Program Contacts .....	68

## Executive Summary

Hydrogen and fuel cell technologies have the potential to play a significant role in the nation's energy future. Hydrogen can be produced from a variety of domestic resources and used in highly efficient fuel cells. The U.S. government has invested more than \$1.2 billion in the Department of Energy's (DOE) Hydrogen Program, which focuses on developing commercially viable hydrogen and fuel cell technologies to reverse America's growing dependence on foreign oil and reduce greenhouse gas emissions.

Several authoritative reports suggest that hydrogen and fuel cell technologies can play a significant role in the nation's energy future. For example, the National Academy of Sciences (NAS), in a report<sup>1</sup> released in February 2004, concluded that "A transition to hydrogen as a major fuel in the next 50 years could fundamentally transform the U.S. energy system, creating opportunities to increase energy security through the use of a variety of domestic energy resources for hydrogen production while reducing environmental impacts, including atmospheric carbon dioxide (CO<sub>2</sub>) emissions and criteria pollutants." More recently, the July 2008 report<sup>2</sup> by the NAS reiterates this earlier conclusion but adds that substantial government assistance and actions are required to support the transition.

The National Coal Council, a federal advisory committee to the Secretary of Energy, in its 2006 and 2008 reports<sup>3,4</sup>, recognizes that the use of coal — America's largest domestic fossil energy resource — offers the potential for producing abundant, economically attractive hydrogen to provide both increased energy security and reduction of CO<sub>2</sub> emissions.

The DOE Hydrogen Posture Plan<sup>5</sup> of December 2006 describes the planned activities, milestones, and targets for successfully integrating and implementing technology research, development, and demonstration (RD&D) needed to cost-effectively produce, store, and distribute hydrogen for use in fuel cell vehicles and electricity generation. The Posture Plan was developed by the Offices of Energy Efficiency and Renewable Energy (EERE), Fossil Energy (FE), Science (SC), Nuclear Energy (NE), and the Department of Transportation (DOT). As stated in the Posture Plan, "Technologies will continue to be evaluated and developed to produce low-cost hydrogen from domestic and secure sources of coal with the capture and sequestration of carbon dioxide."

### Carbon Sequestration – A Key Enabler for Near-zero Emissions

Fossil fuels are a critical component of the U.S. and global energy mix and are expected to continue to play an important role in the future. To address the issue of carbon emissions from fossil fuel use, carbon sequestration — the safe, permanent, and economic capture and storage of carbon emissions from carbon emitting sources — will play an important role. The hydrogen from coal production process facilitates the capture of carbon dioxide from the plant by producing nearly pure streams of hydrogen and carbon dioxide. Hydrogen can be used in stationary or transportation applications while the nearly pure stream of carbon dioxide can be sequestered in geologic formations or by other methods. When combined with advancements in other emissions control technologies, carbon sequestration can help achieve the goal of near-zero emissions fossil fuel plants.

<sup>1</sup> National Academy of Sciences, *The Hydrogen Economy: Opportunities, Costs, Barriers, and R&D Needs*, February 2004.

<sup>2</sup> National Academy of Sciences, *Transitions to Alternative Transportation Technologies — A Focus on Hydrogen*, July 2008.

<sup>3</sup> National Coal Council, *Coal: America's Energy Future*, March 2006.

<sup>4</sup> National Coal Council, *The Urgency of Sustainable Coal*, May 2008.

<sup>5</sup> Department of Energy, *Hydrogen Posture Plan, December 2006*, [http://www.hydrogen.energy.gov/pdfs/hydrogen\\_posture\\_plan\\_dec06.pdf](http://www.hydrogen.energy.gov/pdfs/hydrogen_posture_plan_dec06.pdf).

The Hydrogen from Coal RD&D Plan encompasses FE's technical activities to meet the goals of the Hydrogen Posture Plan. Coal-based hydrogen production offers a means to transition to a hydrogen-based economy while carbon-free technologies can be further advanced and proved to be commercially attractive.

## The Hydrogen from Coal RD&D Plan

The FE Hydrogen from Coal Program was initiated in fiscal year 2004 (FY 2004) to support the DOE goals in the Hydrogen Posture Plan by developing technologies that utilize domestic coal in a clean manner to produce hydrogen to help increase energy security and reduce emissions of greenhouse gases (GHGs). The mission of the Hydrogen from Coal Program is to develop advanced technologies through joint public and private RD&D and facilitate the transition to the hydrogen economy and the use of our nation's abundant coal resources to produce, store, deliver, and utilize affordable hydrogen in an environmentally responsive manner. Where applicable, the Hydrogen from Coal Program will coordinate its activities with related clean coal programs (e.g., gasification and sequestration) and other federal, state, and local organizations that are interested in deploying coal-derived hydrogen technologies.

**Goals:** The goals of the Hydrogen from Coal Program are:

- Production
  - Central Production Pathway
    - By the end of 2016, prove the feasibility of a 60 percent efficient, near-zero emissions, coal-fueled hydrogen and power co-production facility that reduces the cost of hydrogen by 25 percent compared to current coal-based technology.<sup>6</sup>
  - Alternate Hydrogen Production Pathway
    - By the end of 2014, make available an alternative hydrogen production pathway, including a product reforming system, for decentralized production of hydrogen from high hydrogen content hydrocarbon liquids and/or substitute natural gas (SNG) that can be delivered through the existing fuel distribution infrastructure.
  - Polygeneration
    - By 2015, make available processes to enhance coal facility profitability by producing a variety of high-value, coal-derived chemicals and/or carbon materials that can be incorporated into the central or alternate pathway hydrogen production systems.
- Utilization – Complete the development of hydrogen and hydrogen-natural gas mixture engine modifications and operations by the end of 2010.

### Technology Elements

The Hydrogen from Coal Program will improve upon current technology and make available new, innovative technologies that can produce and deliver affordable hydrogen from coal with significantly reduced or near-zero emissions of GHGs and criteria pollutants. The specific activities in this RD&D Program are shown in the large blue-shaded box in Figure ES-1. There are two key hydrogen production pathways for the program — the central production pathway (pure gaseous hydrogen) and the alternate hydrogen production pathway (via the reforming of hydrogen-rich liquid fuel and substitute natural gas (SNG). In conjunction with these two pathways, polygeneration — the production of high-value carbon-based materials or chemicals — will utilize the facilities, products, or intermediate products of a

---

<sup>6</sup> Overall efficiency depends on product mix (i.e., electricity and hydrogen). The 60 percent efficient facility is based on the product mix in Case 3 in Section 3.2 of the RD&D Plan.


hydrogen, liquid fuels, or SNG plant that also co-produces electricity. The high-value, carbon-based materials or chemicals produced through polygeneration will increase the economic viability of these facilities, making them more attractive and ultimately enhancing profitability of either a stand-alone hydrogen production plant or when integrated with an Integrated Gasification Combined Cycle (IGCC)-based co-production facility.

A description of each production pathway follows:

1) Central production pathway – Hydrogen is produced at a large, central facility by converting coal into hydrogen and then delivering the product to end-users. These plants may or may not co-produce electricity and/or other high-value products, and will be designed to allow capture and ultimately sequestration of CO<sub>2</sub>.

2) Alternate production pathway – Hydrogen-rich, zero-sulfur liquids and SNG are produced from coal at a central location. Hydrogen-rich liquids and SNG can potentially be transported through the existing petroleum or natural gas pipeline delivery networks to distributed locations (refueling stations), where they can be reformed into hydrogen near the end-user.

Figure ES-1. FE Hydrogen Program Components

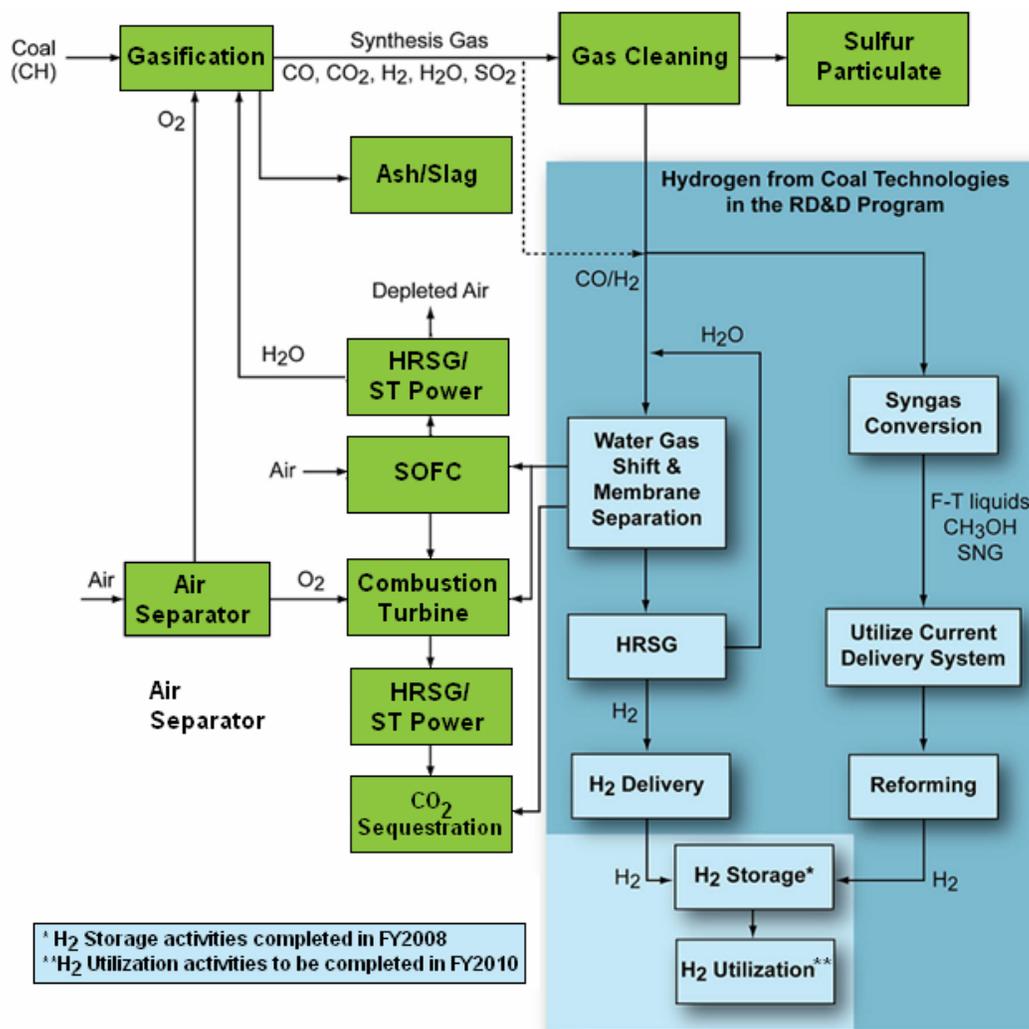

## Overview of Technology in the RD&D Plan

The areas of research and technical elements that the program will pursue include:

- Central Production
  - Perform research on new strategies for water-gas shift (WGS), membrane separations, adsorption/solvent separation systems, polishing filters (for high hydrogen purity), and advanced concepts such as chemical looping and process intensification. Process intensification is the concept of developing novel technologies that combine multiple processes into one step, use new control methods, or integrate alternative energy technologies with hydrogen from coal technologies. Central Production will also include analysis and evaluation of the coal to hydrogen pathway (production, delivery, and distribution) to the end user.
- Alternate Hydrogen Production Pathway
  - Develop hydrogen-rich, liquid fuels and SNG production and reforming technologies.
- Polygeneration
  - Develop processes to produce high-value, carbon-based materials from coal-fed facilities associated with the central and alternate hydrogen production pathways.
- Utilization
  - Modify and optimize conventional and advanced internal combustion engines to operate on hydrogen or hydrogen-natural gas mixtures and demonstrate the performance of these engines.

Research efforts also will be coordinated with other programs such as EERE's Hydrogen, Fuel Cells, and Infrastructure Technologies Program, to leverage technical skills and funding, minimize duplication of efforts, optimize resource (funds/manpower) utilization, and achieve maximum synergism while ensuring that the nation's energy security and environmental goals are addressed.

## Accomplishments and Progress

The Hydrogen from Coal Program has successfully transitioned from its initial start-up in FY 2004 to full operations. The Program has been actively soliciting proposals from industry, universities, and other organizations to help the program achieve its goals. Currently, the program has 38 projects that conduct research to develop:

- Advanced technologies targeted toward higher efficiency and reduced hydrogen production costs from central station plants.
- Alternate pathways that produce hydrogen from high hydrogen content liquids and SNG.
- Polygeneration of high value chemicals and carbon products.
- Processes for utilizing hydrogen and/or hydrogen-natural gas mixtures in internal combustion engines as a near-term strategy to deploy hydrogen.
- An open architecture hydrogen production and delivery facility to test and evaluate innovative concepts.

Research progress is periodically reviewed to update the RD&D Plan with respect to goals, technical targets, milestones, and program schedules. This FY 2009 RD&D Plan update reflects the most recent status of the Hydrogen from Coal Program.

## Technical

Several of the hydrogen membrane developers' test results have shown that their membranes can achieve the Program's Central Hydrogen Production Pathway long-range 2015 flux targets.

- Eltron Research, Inc. initiated tests under WGS feed stream conditions; best alloy membrane has demonstrated a H<sub>2</sub> flux rate of 411 standard cubic feet per hour per square foot (scfh/ft<sup>2</sup>).
  - Lifetime testing reactor operated several tests to 600 hours; initial baseline membrane testing in H<sub>2</sub>/N<sub>2</sub> feed streams show stable performance at 200 scfh/ft<sup>2</sup>.
  - Down-selected catalyst tested in streams with 20 ppm H<sub>2</sub>S. Stable H<sub>2</sub> flux observed for 160 hours.
- Worcester Polytechnic Institute (WPI) achieved 359 scfh/ft<sup>2</sup> H<sub>2</sub> flux with a 3-5 micron (μm) palladium(Pd)/Inconel membrane at 442°C and 100 psi ΔP.
  - Built engineering-scale prototype membrane (2" outer diameter, 6" length, 8.8 μm thickness).
  - Total test duration of 63 days at 450°C, 15 psi ΔP, 80 scfh/ft<sup>2</sup> H<sub>2</sub> flux, 99.99% purity (calculates to 340 scfh/ft<sup>2</sup> H<sub>2</sub> flux under DOE flux target operating conditions).
- United Technologies Research Center (UTRC) tested five separators using PdCu™ alloy which showed increased surface stability in bench-scale tests.
- Colloidal Pd/nano-oxide membrane shows H<sub>2</sub> flux of 400 scfh/ft<sup>2</sup>

NETL completed a comprehensive assessment of the production of precious metals currently used in hydrogen membrane construction. The assessment showed:

- Global deposits are primarily located in South Africa and Russia.
- Less than 10 significant mining companies currently exist in the world; production is declining.
- Mining practices have significant CO<sub>2</sub> footprint.
- Commercial deployment using precious metals has potential global economic and environmental impacts.

Each of these factors could restrain the ability to deliver centrally produced hydrogen via membrane separation technologies. Considering these concerns, a competitive Funding Opportunity Announcement was released soliciting research projects that would conduct both fundamental and applied research in two topic areas. The first topic area requested research in novel, non-precious metal hydrogen separation where selected projects would explore innovative membrane materials, concepts, and strategies that separate hydrogen from a coal-based system sufficiently enough to meet the DOE 2015 targets of flux, selectivity, cost, and chemical and mechanical robustness, without the use of platinum group metals. The second area looked for novel hydrogen production methods where selected projects would study innovative techniques; e.g., thermochemical, electrochemical, photochemical, biological, organocatalysis, and adsorption for central hydrogen production using various methods at coal-based facilities. Without the use of precious metals, such new membranes could offer the added benefit of being much less expensive.

Progress continues to be made in the Alternate Hydrogen Production Pathway. Research Triangle Institute (RTI) completed Phase I of the project entitled *Co-Production of SNG and Electricity via Catalytic Coal Gasification*, having constructed and operated a high-pressure bench-scale gasification system and collected data on the distribution and composition of the product streams as a function of various operating conditions. The overall project scope seeks to convert low rank coals into SNG, electricity,

and high-pressure sequestration-ready CO<sub>2</sub> in a catalytically assisted gasification process. Their results confirmed that the process has potential for directly producing a high-methane content syngas in the gasification step. Additionally, a techno-economic analysis study that incorporated yield and composition data showed that a coal-to-SNG process that incorporates the RTI approach could be cost competitive with the market for natural gas dependent upon a price on carbon credits. The base case study for a process that consumes 3,300 tons/day of sub-bituminous coal to produce 28 million standard cubic feet per day of SNG, 90 MW of net electricity, and 4,492 tons/day of sequestration-ready CO<sub>2</sub> reaches the target price of \$4.8 per million British thermal units (MMBtu) with a carbon credit of \$30/ton and progressively improves as the price of carbon credits increases. Continued bench scale testing is expected to define an ideal operating envelope to maximize SNG production via the gasification step and thereby optimize the process and overall economics.

In support of efforts in the Alternate Hydrogen Production Pathway, NETL performed a comprehensive systems analysis study entitled *Affordable Low Carbon Diesel Fuel from Domestic Coal & Biomass* (available on the NETL website at <http://www.netl.doe.gov/energy-analyses/refshelf/detail.asp?pubID=122>). This study evaluated the use of domestic coal and biomass resources to meet national objectives of energy security, economic sustainability, and the mitigation of global climate change. There are significant benefits for the United States when combining coal and biomass as feedstocks to produce fuels:

- Carbon uptake benefits of biomass provide a good advantage.
- Coal can offset variability of biomass supply — coal as a “flywheel.”
- Co-feeding allows biomass to take advantage of economies of scale.
- The cost of coal as a feedstock is low.
- Large coal reserve base; estimates suggest significant biomass reserves may be available.
- Liquid fuels via Fischer-Tropsch (F-T) process are zero-sulfur and have environmental benefits.

Activities within delivery and infrastructure saw a hydrogen production and dispensing facility commissioned in Charleston, WV at Yeager Airport. The facility will produce, compress, store, and dispense hydrogen as a fuel source for vehicles that have been converted to run on hydrogen, as well as other types of ground equipment at the airport. Additionally, the facility will service as a research, development, test, and evaluation (RDT&E) platform designed to allow new innovations in hydrogen technology to be “swapped in” and tested within the context of an operating hydrogen station. The new hydrogen-dispensing facility is the first of three that are planned along Interstate-79 from Charleston, WV to Pittsburgh, PA to demonstrate the viability of hydrogen as an alternative transportation fuel. Construction of additional facilities is planned at West Virginia University in Morgantown, WV, and Carnegie Mellon University in Pittsburgh, PA.

### *Program*


Hydrogen production from coal is closely linked with the system’s up-front gasification technologies and downstream CO<sub>2</sub> capture and sequestration. Therefore, these three DOE programs have coordinated with each other in the Office of Clean Coal to enhance integration of the separate programs. Additionally, the Hydrogen from Coal Program continues to coordinate with other DOE offices by participating in the development of various planning documents and in the DOE Hydrogen Program Annual Merit Review of the sponsored projects.

## Benefits

- **Achieve energy security and a sustainable hydrogen economy by economically producing hydrogen from coal.**
  - The United States is becoming increasingly dependent on imported oil for transportation fuels. Increased demand from developing countries for the finite world oil reserves is expected to raise crude oil prices and cause world oil production to peak, possibly over the next 20–30 years. Some analysts' projections suggest that this peaking may already be occurring or may occur within the next decade. On an energy basis, U.S. coal reserves nearly equal the total proven world conventional oil reserves — nearly a 250-year supply of U.S. coal at today's domestic production rates. Hydrogen represents a clean alternative fuel that can help to reduce the nation's requirements for imported oil.
- **Reduce environmental concerns associated with energy use in automotive and stationary power applications through the clean production of hydrogen from coal in tandem with carbon management.**
  - Gasification technologies have shown the potential to produce clean synthesis gas from coal with virtually zero criteria pollutant emissions. Carbon sequestration technologies that are being developed will provide the capability to cost-effectively use concentrated CO<sub>2</sub> streams in enhanced oil recovery, geological storage, and accelerated biomass growth processes for fuel production. Fuel cells are poised to provide efficient, emission-free power from hydrogen in both automotive and stationary power applications. The potential CO<sub>2</sub> reduction emissions benefits for hydrogen from coal with sequestration, and use in fuel cell vehicles compared to hybrid electric vehicles and internal combustion vehicles, are shown in Figure ES-2.

Ensure the availability of a major primary energy resource that can be used for the production of hydrogen in volumes sufficient to provide the fuel that will be needed for the future fuel cell-powered vehicle market.

**Figure ES-2. System GHG Emissions for Hydrogen from Coal and Use in Fuel Cell Vehicles Compared to Gasoline Use in Hybrid Electric and Internal Combustion Engine Vehicles**

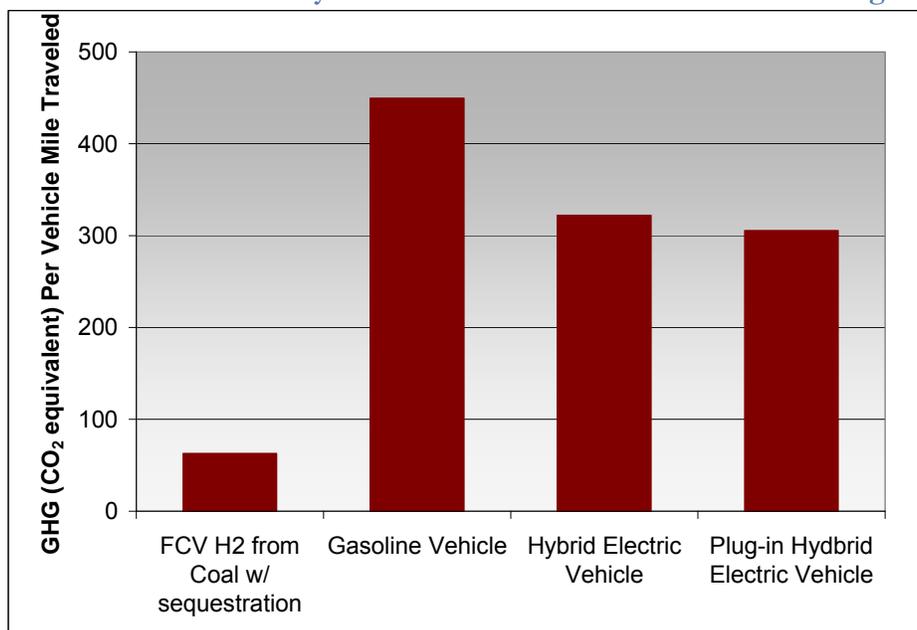

## Technical Activity Gantt Chart Summary

The specific sub-element activities and their associated timelines are shown in the Gantt chart in Figure ES-3, which summarizes: a) the activities and technologies associated with hydrogen production from large central plants, b) the activities and technologies associated with the alternate pathway for distributed hydrogen production from hydrogen-rich liquids and SNG, and c) small-scale research activities being conducted in storage and utilization technologies for hydrogen from coal.


This Multi-year Research, Development, and Demonstration Plan (MYP) addresses the strategies, goals, and progress of the program, and defines the research areas needed to support the overall DOE Hydrogen Program.

This RD&D Plan is organized by section, as follows:

- Section 1. Introduction
- Section 2. Hydrogen from Coal Program Mission and Goals
- Section 3. Technical Discussion
- Section 4. Technical Plan
- Section 5. Implementation Plan

Detailed activities and technical targets are provided in the Technical Plan in Section 4. Implementation of the Program's activities will be coordinated closely with the related activities supported by FE and the EERE, and other organizations both inside and outside the government.

Figure ES-3. Hydrogen from Coal Research, Development, and Demonstration Program

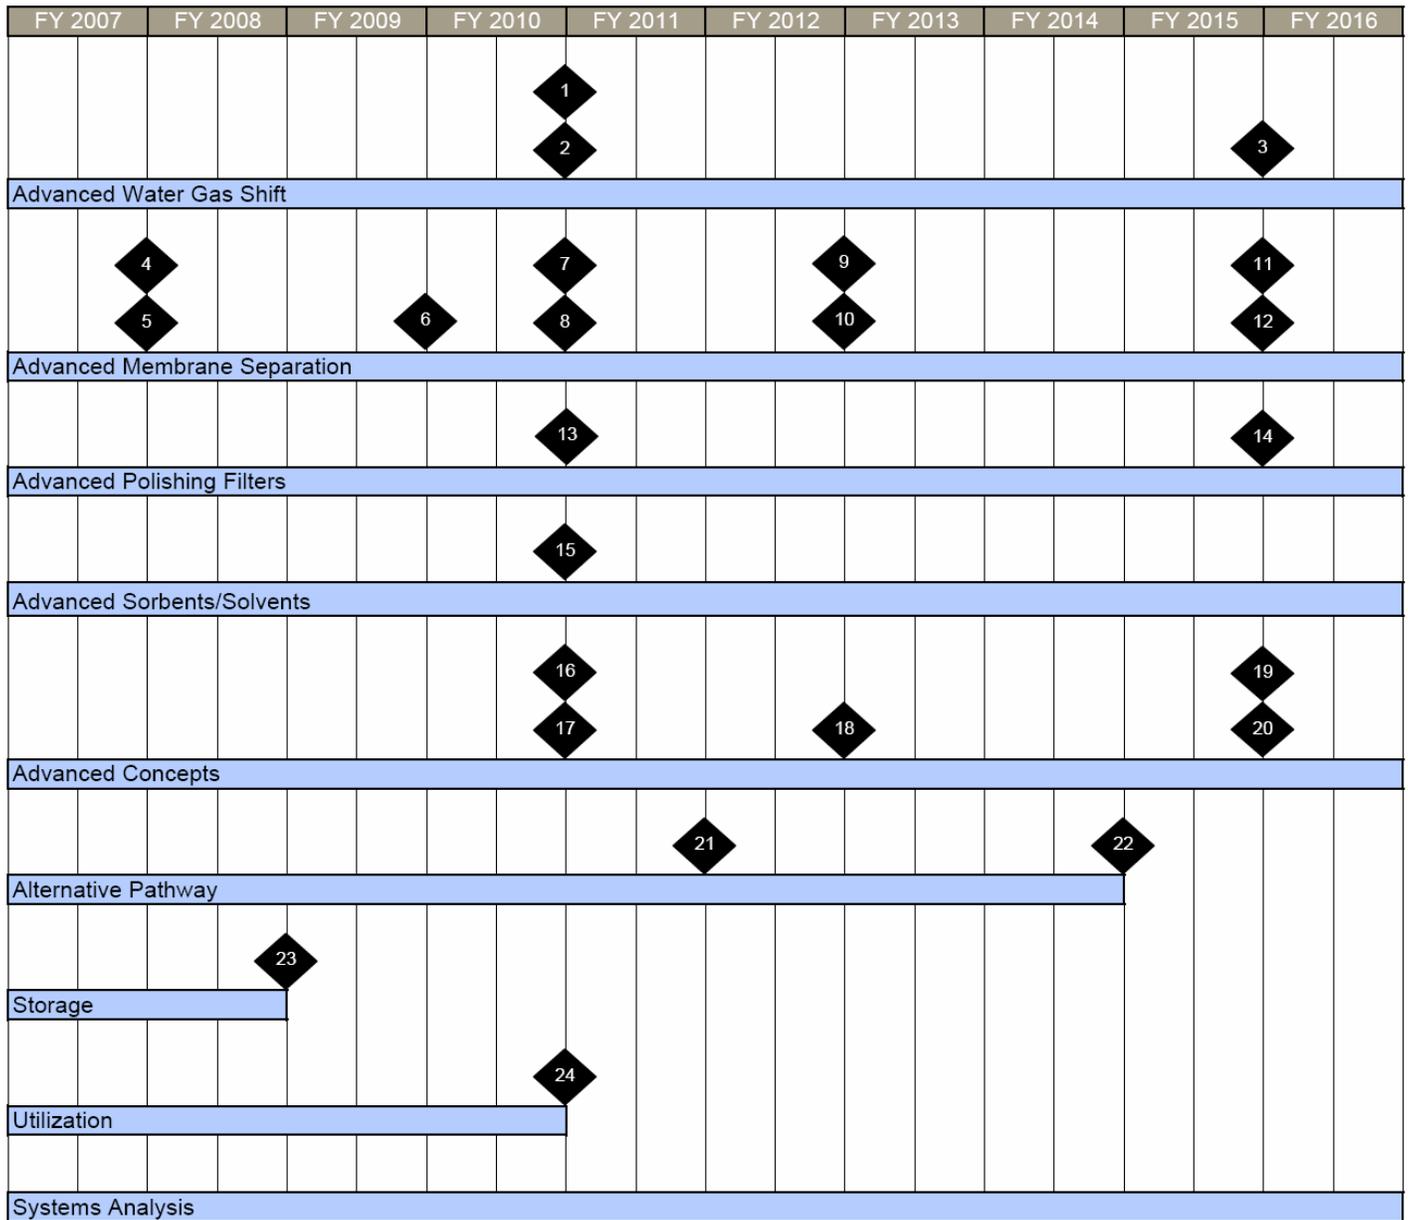

**Key to Figure ES-3:****Advanced WGS**

1. End of 2010: Go/no-go decision on further development of advanced WGS reaction technologies.
2. End of 2010: Systems analysis verifies achievement of 2010 technical targets.
3. End of 2015: Systems analysis verifies achievement of 2015 technical targets.

**Advanced membrane separations**

4. End of 2007: Down-select most promising membrane separation technologies. COMPLETED.
5. Beginning of 2008: Initiate pre-engineering scale development of 1<sup>st</sup> generation membrane separation technology. COMPLETED.
6. Beginning of 2010: Initiate engineering-scale design of 1<sup>st</sup> generation membrane separation technology. COMPLETED.
7. End of 2010: Systems analysis verifies achievement of 2010 technical targets.
8. Beginning of 2011: Initiate pre-engineering of 2<sup>nd</sup> generation module.
9. Beginning of 2013: Integrate and test 1<sup>st</sup> generation membrane separation technology in advanced coal facility.
10. Beginning of 2013: Initiate engineering-scale design of 2<sup>nd</sup> generation advanced hydrogen production and separation technologies.
11. End of 2015: Systems analysis verifies achievement of 2015 technical targets.
12. Beginning of 2016: Integrate 2<sup>nd</sup> generation advanced hydrogen production and separation technologies into advanced co-production facilities.

**Advanced polishing filters**

13. End of 2010: Verify achievement of targets for gas turbines and solid oxide fuel cells (SOFCs).
14. End of 2015: Verify achievement of targets for proton exchange membrane (PEM) fuel cells.

**Advanced sorbents/solvents**

15. End of 2010: Down-select most promising advanced sorbents/solvents for further development.

**Advanced concepts/process intensification**

16. End of 2010: Identify and down-select most promising advanced concepts for further development.
17. End of 2010: Initiate pre-engineering scale development of 1<sup>st</sup> generation advanced concepts.
18. Beginning of 2013: Initiate engineering-scale design and construction of advanced concepts.
19. End of 2015: Verify achievement of 2015 technical targets for advanced separations.
20. Beginning of 2016: Integrate engineering-scale advanced concepts into co-production facility.

**Alternative Pathway**

21. End of 2011: Determine the most feasible alternate hydrogen from coal pathway(s) and reforming system(s) for producing hydrogen-rich liquid fuels and SNG that are able to meet the hydrogen cost target.
22. End of 2014: Optimize, integrate, and make available an alternate hydrogen production pathway and reforming system to produce decentralized hydrogen from coal.

**Storage**

23. End of 2008: Successfully complete laboratory/bench-scale research on promising novel hydrogen storage systems. COMPLETED.

**Utilization**

24. End of 2010: Successfully complete research to modify and optimize advanced engine types fueled by hydrogen and/or hydrogen-natural gas mixtures.

## 1. Introduction

Hydrogen is a clean energy carrier (like electricity) made from diverse domestic resources such as renewable energy (e.g., solar, wind, geothermal), nuclear energy, and fossil energy (combined with carbon capture/sequestration). Hydrogen in the long-term will simultaneously reduce dependence on foreign oil and emissions of GHGs and criteria pollutants.

The DOE Hydrogen Program is making progress towards commercialization of hydrogen-powered fuel cell vehicles and the infrastructure to fuel them through an aggressive research program that accelerates the timeline for resolving technical and economic barriers. The overall DOE Hydrogen Program includes participation from the Offices of EERE, FE, NE, and SC. The Program coordinates interactions with industry, academia, and the international community (such as the International Partnership for a Hydrogen Economy). *The National Hydrogen Energy Roadmap* and *A National Vision of America's Transition to a Hydrogen Economy — to 2030 and Beyond* are two guiding documents that provide a blueprint for the coordinated, long-term, public and private efforts required for hydrogen energy development and summarize the potential role for hydrogen systems in America's energy future, outlining the common vision of the hydrogen economy.


DOE also co-chairs an Interagency Taskforce which is a mechanism for collaboration among nine federal agencies (Energy, Agriculture, NASA, Transportation, Commerce, State, Defense, Environmental Protection Agency, and the National Science Foundation).

In support of the Department's Hydrogen Program efforts, FE established the Hydrogen from Coal Program to develop advanced, novel, and innovative hydrogen production technologies based on coal, our nation's most abundant domestic fossil fuel resource (see Figure 1), to help the United States meet the goals of improved energy security and reduced GHG emissions. This RD&D Plan includes the program's strategies and goals through 2016. The Plan also defines the research areas where the program will focus its expertise to develop the technologies needed to support the conversion of coal to high-purity hydrogen and subsequent delivery and use.

As a pre-eminent primary source of energy, coal is an abundant domestic resource, with the United States boasting hundreds of years of supply at current demand levels. The production of hydrogen from coal for use in fuel cell vehicles in the transportation sector will reduce U.S. reliance on foreign imports of petroleum.

A benefits analysis evaluated the system encompassing resource extraction and transportation, followed by conversion (e.g., a refinery to make gasoline from petroleum, or a plant to produce hydrogen from coal), and finally end use of hydrogen in vehicles. The analysis estimated that hydrogen produced from coal can offer environmental benefits and reduced petroleum consumption compared to gasoline powered vehicles, as shown in Figures 2 and 3.

Figure 1. Fossil Fuel Reserves

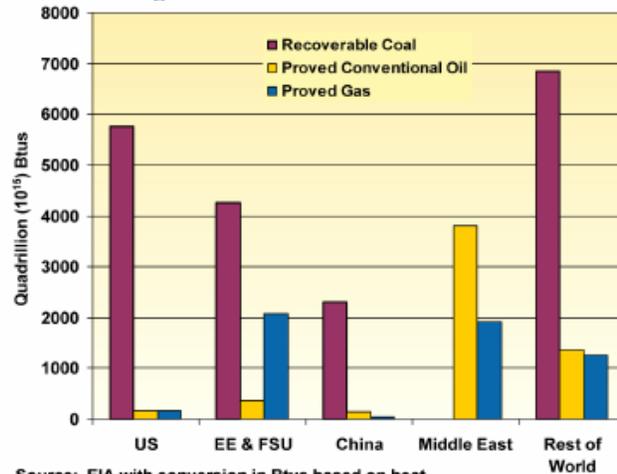


Source: EIA with conversion in Btus based on heat


U.S. coal reserves nearly equal total proved world conventional oil reserves

Figure 2 shows that, with carbon sequestration in the production of hydrogen from coal, net system emissions of CO<sub>2</sub> will be nearly eliminated compared to the internal combustion engine vehicle and hybrid electric vehicle systems. Without sequestration, emissions of CO<sub>2</sub> will be lower than internal combustion engine systems. Figure 3 shows the reduction in the consumption of petroleum.

**Figure 2. CO<sub>2</sub> Emissions from FCV, HEV, and ICEV Transportation Systems**

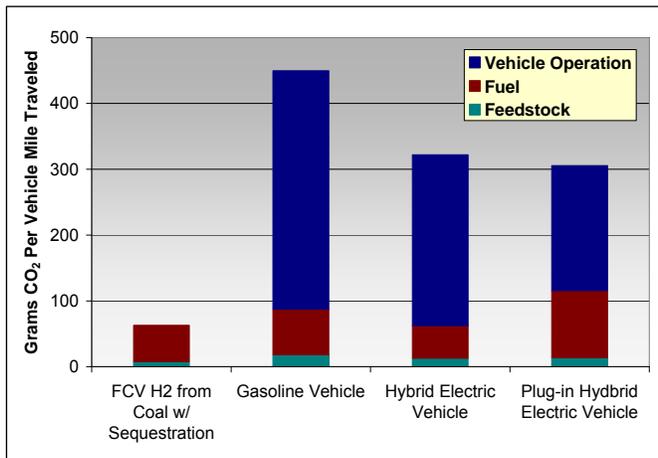

**Figure 3. Percent Reduction in Petroleum Use Compared to Gasoline Vehicle**

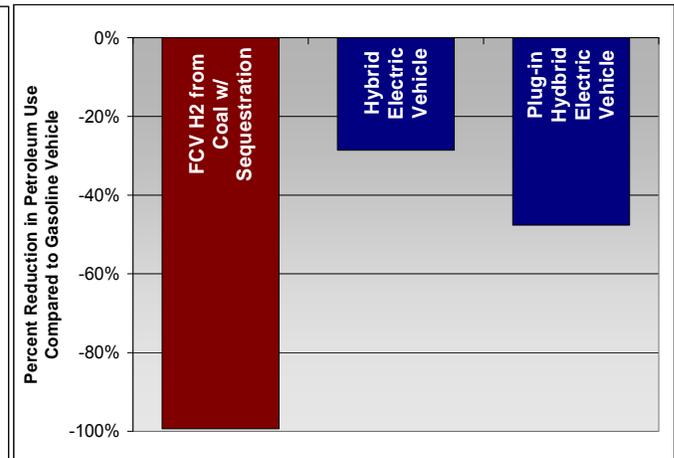

The Hydrogen from Coal RD&D Plan provides a roadmap that the program will pursue to develop the technologies necessary for coal to meet the overall DOE Hydrogen Program goals of improved energy security and reduced GHG emissions. It discusses current and future technologies for the production of hydrogen from coal, and identifies associated programs that will contribute to the development of facilities for the co-production of hydrogen and power with near-zero emissions. The Plan will serve as a resource document for the program and will be updated as goals, milestones, and targets are achieved, and as assumptions on markets and technologies change.

## 2. Hydrogen from Coal Program – Mission and Goals

The mission of the Hydrogen from Coal Program is to develop advanced and novel technologies that will ensure the use of our nation's abundant coal resources to produce, store, deliver, and utilize affordable hydrogen in a safe and environmentally clean manner. The RD&D activities will provide the pathways to produce affordable hydrogen from coal in an environmentally clean manner, and facilitate the transition to the hydrogen economy as outlined in the Hydrogen Posture Plan.

The goals for Program are provided below with a brief discussion.

### ■ Production

In the Central Production Pathway, hydrogen is produced at a large-scale central facility where coal is converted into hydrogen or into hydrogen and electric power as co-products. This approach fully supports the Office of Clean Coal's objectives of research, development, and demonstration for eventual commercial deployment of near-zero clean coal facilities that incorporate carbon capture and sequestration. The hydrogen produced at these central plants then must be delivered and distributed to the end users.

#### – Central Production Pathway

- By the end of 2016, prove the feasibility of a 60 percent efficient, near-zero emissions, coal-fueled hydrogen and power co-production facility that reduces the cost of hydrogen by 25 percent compared to current coal-based technology.<sup>7</sup>

An alternative to producing hydrogen gas at a central location and having to deliver this hydrogen to the end users is to produce hydrogen-rich, zero-sulfur liquid fuels or SNG from coal in a large-scale central facility that also could co-produce electric power. The liquid product or SNG (i.e., a hydrogen carrier) would be transported through the existing petroleum fuels or natural gas distribution network to sub-central or distributed locations close to the end users (refueling stations). At distributed plants, liquid fuels or SNG would be reformed into hydrogen at the refueling station. This pathway is envisioned as an interim pathway for hydrogen production until a widespread hydrogen delivery infrastructure is available.

#### – Alternate Hydrogen Production Pathway

- By the end of 2014, make available an alternative hydrogen production pathway, including a product reforming system, for decentralized production of hydrogen from high hydrogen content hydrocarbon liquids and/or SNG that can be delivered through existing fuel distribution infrastructure.

### ■ Polygeneration will investigate the production of high-value, carbon-based chemicals and materials in plants that produce hydrogen, liquid fuels, or SNG to improve economic performance.

- By 2015, make available processes to enhance coal facility profitability by producing a variety of high-value, coal-derived chemicals and/or carbon materials that can be incorporated into the central or alternate pathway hydrogen production systems.

### ■ Utilization

- Successfully complete the development of hydrogen and hydrogen-natural gas mixture internal combustion engine modifications and operations by the end of 2010.

---

<sup>7</sup> Overall efficiency depends on product mix (i.e., electricity and hydrogen). The 60 percent efficient facility is based on the product mix in Case 3 in Section 3.2 of the RD&D Plan.

### 3. Technical Discussion

#### 3.1. Current Technology

Today, hydrogen is produced from coal by gasification followed by processing the resulting synthesis gas, and is used primarily to produce hydrogen for the production of ammonia for fertilizer. Coal-derived synthesis gas also is being converted to methanol for use as an intermediate product in the chemical industry. Methanol can be used as a hydrogen carrier for subsequent reforming applications or use in fuel cells, such as those being considered for small portable devices including laptop computers. Advanced liquid-phase methanol production from coal technology has been successfully demonstrated and commercialized at the Eastman Chemical Complex in Kingsport, Tennessee, a DOE Clean Coal Technology Demonstration Program project.

In its simplest form, the process used to produce hydrogen from coal is shown schematically in Figure 4. The coal first is gasified with oxygen and steam to produce a synthesis gas consisting mainly of carbon monoxide (CO) and hydrogen (H<sub>2</sub>), with some CO<sub>2</sub>, sulfur, particulates, and trace elements. Oxygen (O<sub>2</sub>) is added in less than stoichiometric quantities so that complete combustion does not occur. This process is highly exothermic, with temperatures controlled by the addition of steam. Increasing the temperature in the gasifier initiates devolatilization and breaking of weaker chemical bonds to yield tars, oils, phenols, and hydrocarbon gases. These products generally further react to form H<sub>2</sub>, CO, and CO<sub>2</sub>. The fixed carbon that remains after devolatilization is gasified through reactions with O<sub>2</sub>, steam, and CO<sub>2</sub> to form additional amounts of H<sub>2</sub> and CO. These gasification reactions are shown in Figure 5.

Figure 4. Current Hydrogen from Coal Production


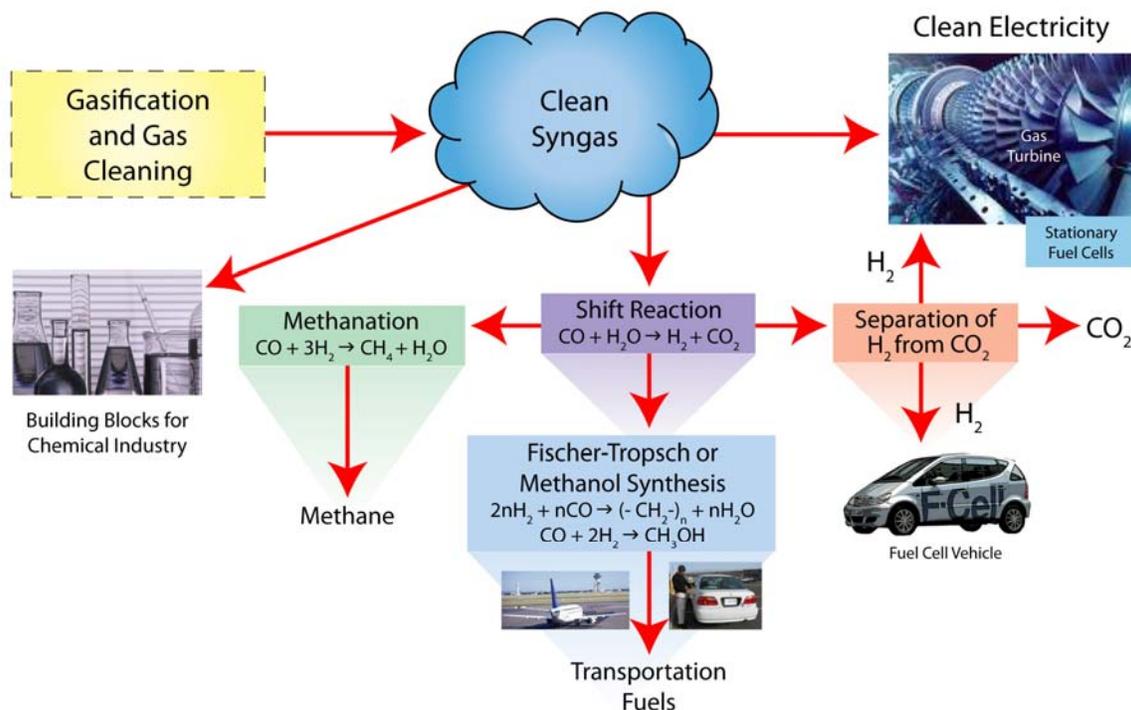


Figure 5. Major Gasification Reactions

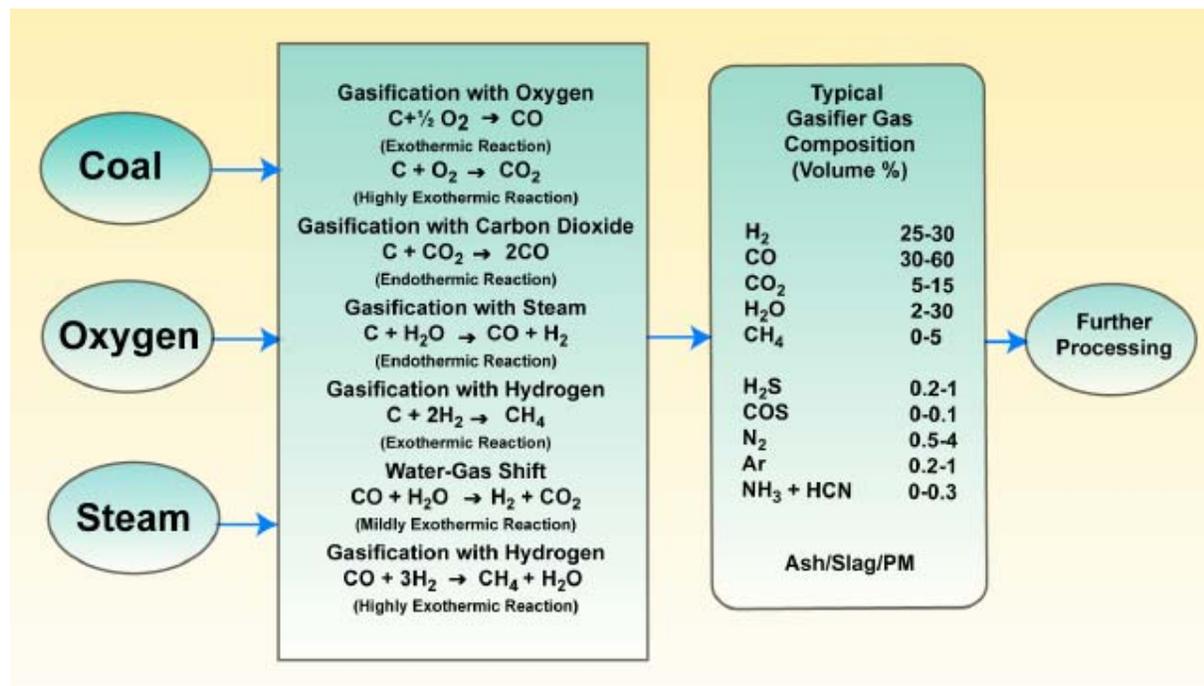

The minor and trace components of coal also are transformed in the gasification reactor. Under the sub-stoichiometric reducing conditions of gasification, most of the fuel's sulfur converts to hydrogen sulfide (H<sub>2</sub>S), but some (3–10 percent) also converts to carbonyl sulfide (COS). Nitrogen bound with the fuel generally converts to gaseous nitrogen (N<sub>2</sub>), with some ammonia (NH<sub>3</sub>) and a small amount of hydrogen cyanide (HCN) also being formed. Most of the chlorine content of the fuel is converted to hydrogen chloride (HCl) gas and some particulate-phase chlorides.

Minerals in the feedstock (ash) separate and leave the bottom of the gasifier as an inert slag (or bottom ash), a potentially marketable solid product. The fraction of the ash entrained with the syngas, which is dependent upon the type of gasifier employed, requires removal downstream in particulate control equipment, such as filters and water scrubbers. This particulate is typically recycled to the gasifier to ensure high carbon conversion. Some gasifiers also yield devolatilization or pyrolysis products (e.g., coal tars, oils, phenols), some of which can be sold. The remaining products can and must be controlled to eliminate any potential environmental impacts.

Trace elements associated with both organic and inorganic components of the coal, such as mercury and arsenic, are released during gasification and settle in different ash fractions (e.g., fly ash, bottom ash, slag) and gaseous emissions. The particular chemical species and physical forms of condensed-phase and vapor-phase trace elements are functions of gasifier design and operating conditions.

The temperature of the synthesis gas as it leaves the gasifier is generally in the range of 1,000 °F to 1,900 °F, depending upon the type of gasifier selected. With current technology, the gas has to be cooled to ambient temperatures to remove contaminants, although with some designs, steam is generated as the synthesis gas is cooled. Depending on the system design, a scrubbing process is used to remove HCN, NH<sub>3</sub>, HCl, H<sub>2</sub>S, and particulates, and operates at low temperatures with synthesis gas leaving the process at about 72 °F. The H<sub>2</sub>S and COS, once hydrolyzed, are removed by dissolution in, or reaction with, an organic solvent and converted to valuable by-products, such as elemental sulfur or sulfuric acid with 99.8

percent sulfur recovery. The residual gas from this separation can be combusted to satisfy process-heating requirements.

This raw clean synthesis gas must be re-heated to 600–700 °F for the first of two WGS reactors that produce additional hydrogen through the catalytically assisted equilibrium reaction of CO with H<sub>2</sub>O to form CO<sub>2</sub> and H<sub>2</sub>. The exothermic reaction in the WGS reactor increases the temperature to about 800 °F, which must be cooled to the required inlet temperature for the second WGS reactor in the range of 250–650 °F, depending on design. The WGS reaction increases the H<sub>2</sub>/CO ratio in the final mixture. Overall, about 70 percent of the feed fuel's heating value is associated with the CO and H<sub>2</sub> components of the gas, but can be higher depending upon the gasifier type. Hydrogen must be separated from the shifted gas containing CO<sub>2</sub>, CO, and other contaminants, and lastly undergo a polishing step that removes any remaining sulfur, CO, and other trace contaminants in order to meet the requirements for various end-uses (e.g., fuel cell vehicles).

Instead of producing and purifying hydrogen from coal-derived synthesis gas at a central facility and subsequently delivering it to the end-user, an alternate pathway prior to the introduction of a hydrogen infrastructure could be to convert the synthesis gas into hydrogen-rich liquids (e.g., F-T liquids) for use as liquid transportation fuels or reformable fuels to produce hydrogen for fuel cell applications. A similar approach would be to catalytically convert the synthesis gas to SNG for reforming into hydrogen at small-scale distributed plants near the end-user.

### 3.2. Comparison of Current and Future Technology

At the present time, no coal-based facilities employing modern gasification systems have been constructed that produce both hydrogen and electric power; however, similar facilities based on heavy oil partial oxidation are in operation. Conceptual plants fed with coal have been simulated using computer models to estimate the technical performance and economics of a co-production plant producing hydrogen and power, based on current technology. Computer simulations also have been developed for conceptual plants that produce hydrogen and some excess power, based on advanced technologies that are presently unavailable for commercial deployment. The status of these advanced technologies varies. Some are close to commercialization while others are farther back in the R&D pipeline. Table 1 summarizes the information developed from three of these computer simulations, all of which include carbon sequestration technologies. A more detailed evaluation of additional co-production cases can be found in the Mitretek report, *Hydrogen from Coal*.<sup>8</sup>

---

<sup>8</sup> *Hydrogen from Coal*, Mitretek Technical Paper MTR 2003-31, July 2002. Cases shown are in \$1998.

**Table 1. Summary of Hydrogen from Coal Cases**

	<b>Units</b>	<b>CASE 1</b>	<b>CASE 2</b>	<b>CASE 3<sup>a</sup></b>
Technology readiness goal	-	Current	2015	2015
Carbon sequestration	%	Yes (87%)	Yes (100%)	Yes (100%)
Hydrogen	MMscfd	119	158	153
Coal (as received)	tons/day	3,000	3,000	6,000
Efficiency	%HHV	59	75.5	59
Excess power	MW	26.9	25	417
Power value	mils/kWh	53.6	53.6	53.6
Capital	\$million	417	425	950
RSP of hydrogen	\$/MMBtu (\$/kg)	8.18 (1.10)	5.89 (0.80)	3.98 (0.54)


<sup>a</sup> Case 3 is a co-production case with twice the coal feedstock as Cases 1 and 2, with equal quantities of coal feed used to produce hydrogen and electricity. Efficiency for this case is reduced compared to Case 2 because of the lower efficiency associated with the large quantity of electric power production in Case 3.

Notes:

- 1) RSP of hydrogen is in \$1998.
- 2) Coal cost is \$29/ton (and is assumed to de-escalate at 1.5 percent below general inflation), and the assumed plant capacity factor is 85 percent.
- 3) For carbon sequestration, the co-produced power is assumed to have a value of \$53.6/MWh, based on an additional cost of power production from Natural Gas Combined-cycle (NGCC) plants with sequestration of 18 mills/kWh and natural gas priced at \$3.15/MM Btu (reference EPRI report 1000316).
- 4) For sequestration, it is assumed that \$10 per ton of carbon is added for sequestration after the concentrated CO<sub>2</sub> stream has been isolated, and the CO<sub>2</sub> stream is compressed to 200 bars (2,900 psi).
- 5) Financial assumptions used for these simulations: 25-year plant life; 67%/33% debt/equity financing; 15% return on equity; 8% interest for a 16-year term; 3% inflation with coal de-escalation of 1.5% per annum below general inflation; 16-year double declining balance depreciation; 40% combined federal and state tax rate; 3-year construction with 50% output in start-up year; carbon sequestration cost of \$10/ton.

Case 1, shown schematically in Figure 6, is a process to produce hydrogen using conventional technology coupled with carbon capture and sequestration. The process assumes that a General Electric (GE) quench gasification system (formerly ChevronTexaco gasification) with conventional acid removal and a pressure swing adsorption (PSA) system for hydrogen recovery are used. All of the CO<sub>2</sub> is removed prior to the PSA unit, compressed to 200 bars (2,900 psi), and sequestered for an additional cost of \$10 per ton of carbon (\$3 per ton of CO<sub>2</sub>). In this configuration, 87 percent of the carbon in the feed is ready for sequestering. The capital cost of the plant is estimated at \$417 million with a required selling price (RSP) of the hydrogen at \$8.18/MMBtu (\$1.10/kilogram [kg] of hydrogen). The amount of hydrogen produced is 119 million standard cubic feet per day (MMscfd), and there are 27 MW of excess power.


**Figure 6. Schematic of Current Technology to Produce Hydrogen from Coal with Carbon Sequestration (Case 1)**

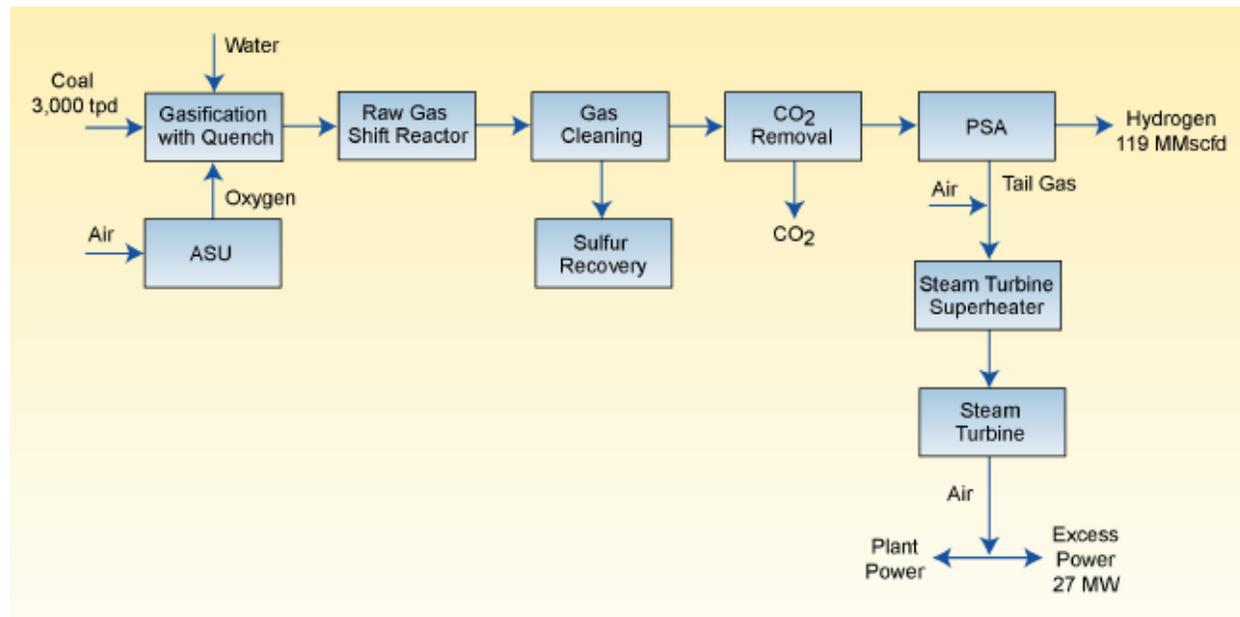

Case 2 represents a process for hydrogen production from coal that uses advanced gasification technology, and advanced membrane technology for hydrogen separation with CO<sub>2</sub> removal, and is carbon sequestration-ready. A schematic of the process is shown in Figure 7. In this configuration, advanced E-gas gasification with hot gas cleanup is used in combination with a ceramic membrane system operating at nearly 600 °C (1,100 °F), which is capable of shifting and separating hydrogen from clean synthesis gas. It is assumed that 90 mole percent of the hydrogen in the synthesis gas is recovered in this membrane system.

The hydrogen produced in Case 2 is separated from the mixed gas stream at high pressure, with the hydrogen product produced at low pressure. The hydrogen must be compressed to various pressures depending on its use or storage. The remaining tail gas, containing mostly CO<sub>2</sub> with some CO and H<sub>2</sub>, is combusted with O<sub>2</sub> in a gas turbine to provide power for the plant. O<sub>2</sub> is used so that a concentrated stream of CO<sub>2</sub> is readily produced for sequestration. Heat is recovered from both the gas turbine exit gas and from the hot hydrogen in heat recovery steam generators (HRSGs), where the steam produced is sent to a steam turbine to provide additional power. This efficiency improvement is due to improved gasifier design combined with hot-gas cleanup that eliminates the need to cool and then reheat the synthesis gas, combined with efficient hydrogen membrane separation incorporating the WGS reaction. The capital cost for the facility is \$425 million, with the required selling price of hydrogen estimated at \$5.89/MMBtu (\$0.79/kg). The amount of hydrogen produced is 158 MMscfd with 25 MW of excess power.

**Figure 7. Schematic of Advanced Technology to Produce Hydrogen from Coal with Carbon Sequestration (Case 2)**

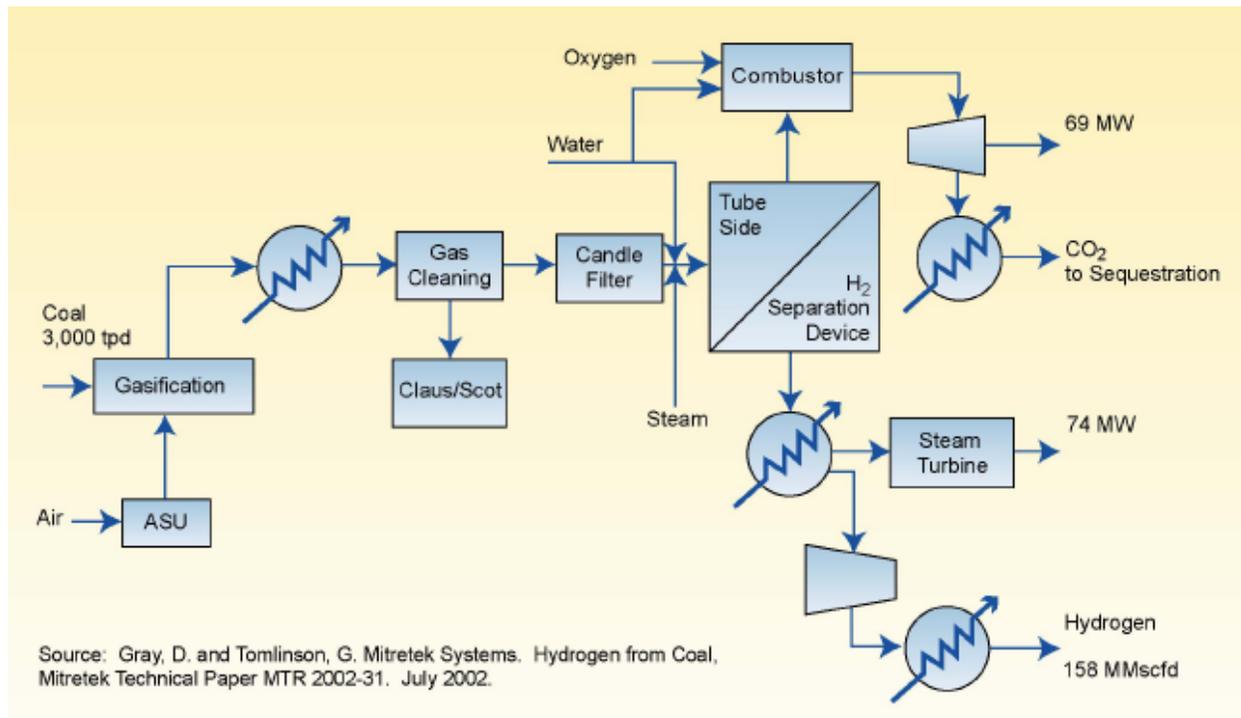


Case 3, shown in Figure 8, is an example of an advanced co-production concept plant. This case produces 153 MMscfd of hydrogen and 417 MW of excess power, and will employ advanced gasification, combustion and turbine systems, membrane separation, and carbon capture and sequestration in a co-production plant producing hydrogen and electric power using technologies similar to Case 2. In Case 3, a separate gasification train is utilized specifically to produce clean electric power. These highly efficient hydrogen and electricity co-production plants could provide significant additional reductions in the cost of hydrogen, reducing the cost to \$4/MMBtu (\$0.54/kg) assuming power is sold at \$53.6/MWh.

The use of SOFCs to generate electricity from hydrogen can also be introduced in these plants. In this configuration, hydrogen production costs can be reduced to about \$3/MMBtu (\$0.40/kg), depending on the price of electric power.

In summary, successful DOE-sponsored R&D efforts in the Hydrogen from Coal Program and associated programs are necessary to achieve the goal of a 25 percent reduction in hydrogen cost as shown in Case 2, and the additional cost reductions depicted in Case 3.

Noblis, Inc. (formerly Mitretek Systems) is in the final stage of updating this techno-economic analysis to reflect recent trends in capital costs.

Figure 8. Schematic of Advanced Co-production Concept with Carbon Sequestration (Case 3)

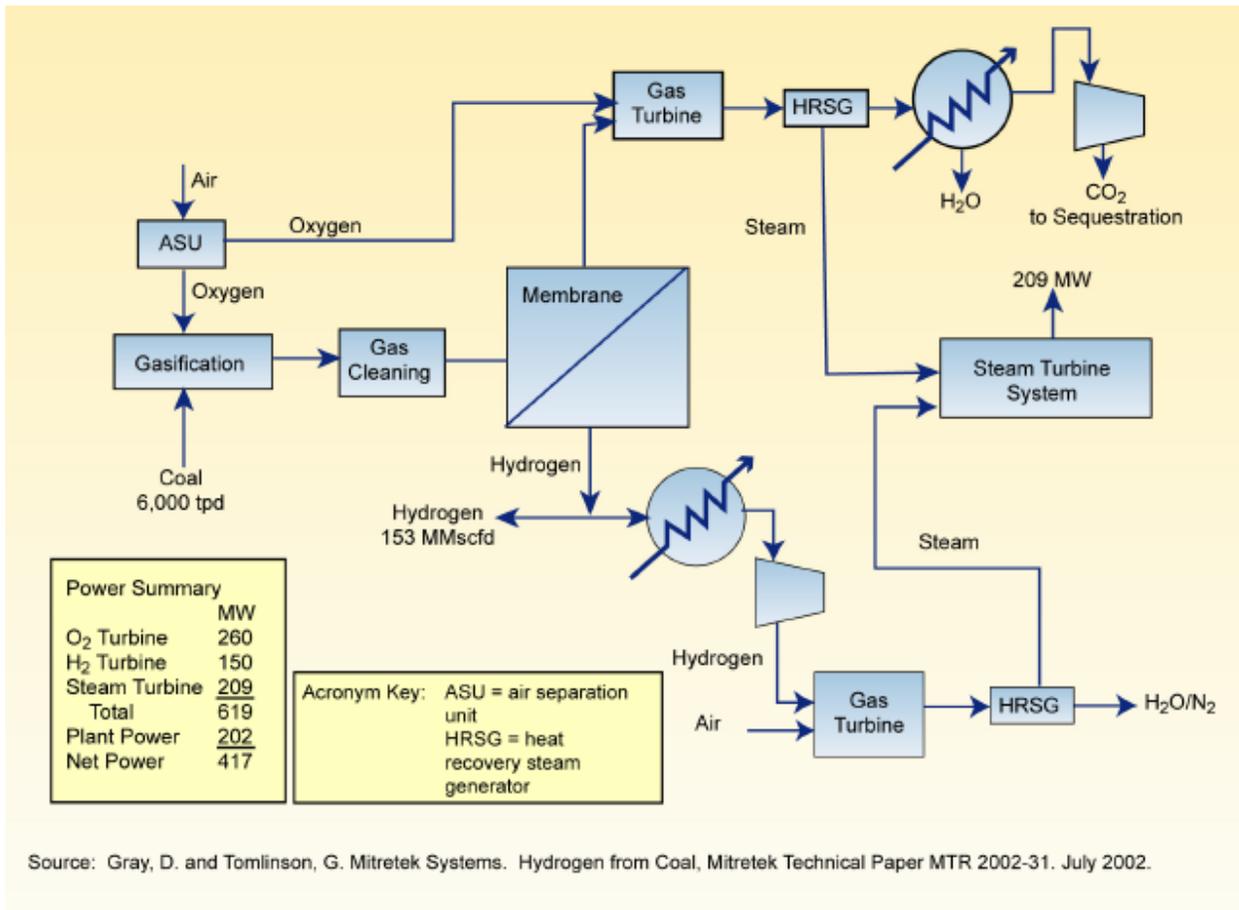

Source: Gray, D. and Tomlinson, G. Mitretek Systems. Hydrogen from Coal, Mitretek Technical Paper MTR 2002-31. July 2002.

## 4. Technical Plan

The Hydrogen from Coal Multi-year RD&D Plan supports the overall DOE Hydrogen Program's goals of improved energy security and reduced GHG emissions through joint public and private RD&D of advanced and novel hydrogen-related technologies for the future hydrogen energy system. The number preceding each element below references the section under which that element of the technical plan is discussed.

- 4.1 Production – Central Production Pathway
- 4.2 Production – Alternate Hydrogen Production Pathway
- 4.3 Production – Polygeneration
- 4.4 Storage
- 4.5 Utilization

As successes are achieved, this RD&D program will improve existing technology and make available new, innovative technology that can produce and deliver affordable hydrogen from coal with significantly reduced or near-zero emissions. These technologies will be discussed in detail in this section, and are further broken down into specific technological areas. Each technology will include goals and milestones as well as technical targets, where appropriate. These goals and milestones are being validated and/or updated based on the changing market and technical needs and the progress being achieved with individual projects.

The specific technical activities in this RD&D Program are shown in the large shaded box in Figure 9. There are two hydrogen production pathways included in this Plan, the central production pathway (gaseous hydrogen) and the alternate hydrogen production pathway (hydrogen-rich liquid fuel and SNG). Polygeneration, an option that can be deployed with both the central and alternate hydrogen production pathways, could utilize the co-production facilities, products, or intermediate products to produce high-value carbon-based materials. The program builds on expected RD&D successes in associated programs within FE. Figures 10 and 11 show a more detailed breakdown of technologies in the program and the proposed developmental schedule.

Figure 9. Office of Fossil Energy Hydrogen Program Components

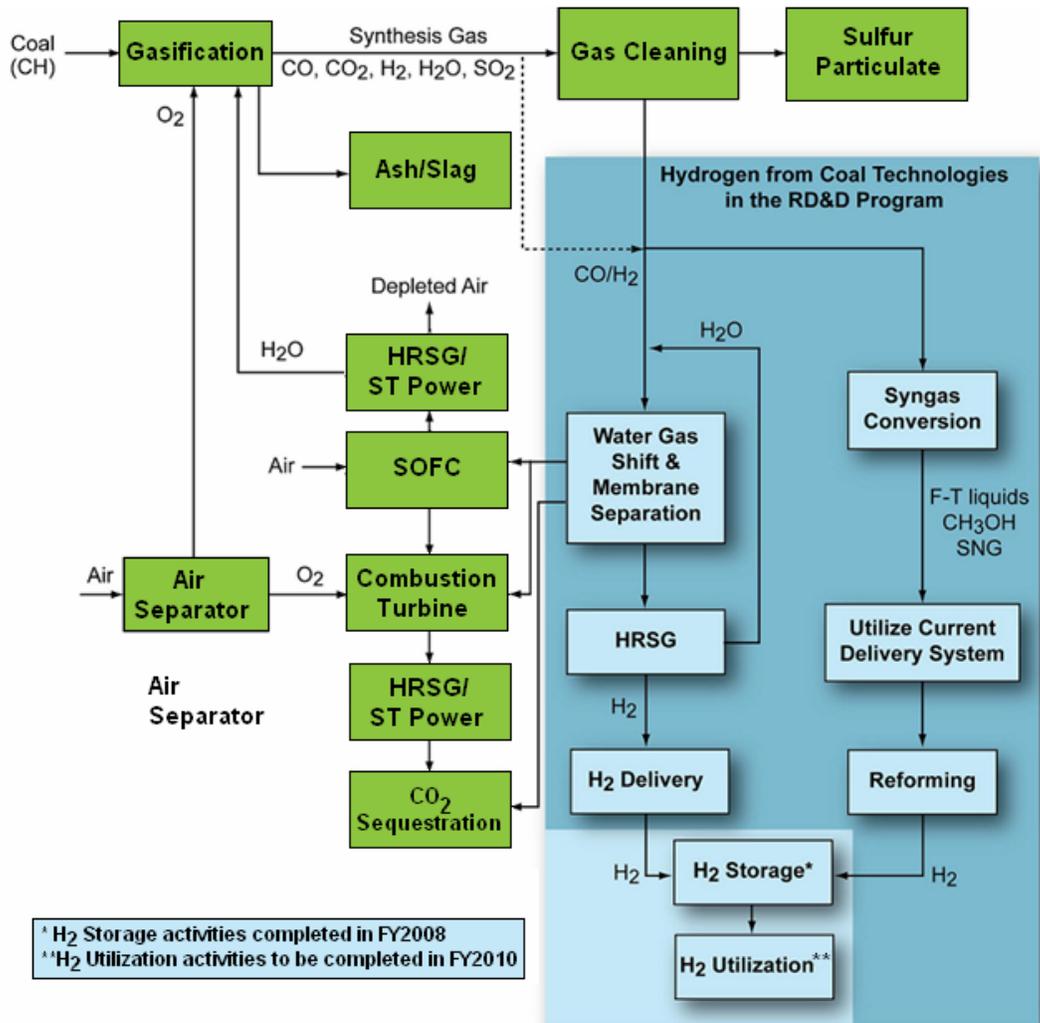


Figure 10. Key Elements of the Hydrogen from Coal Program


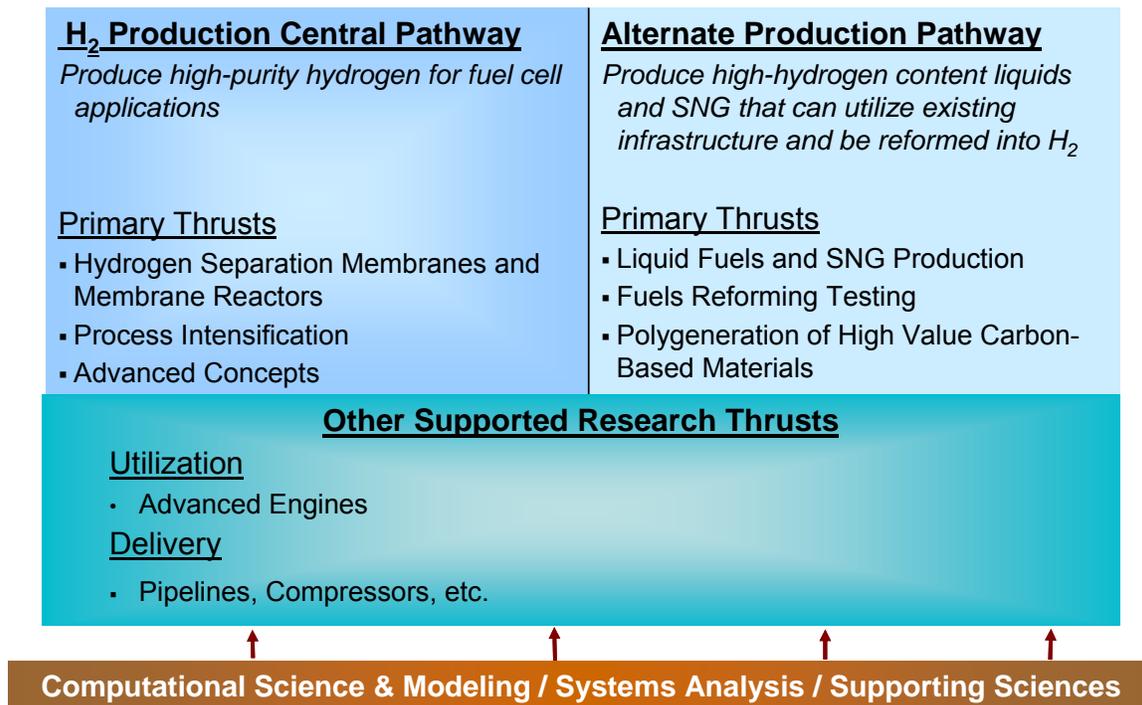


Figure 11. Hydrogen from Coal RD&D Program

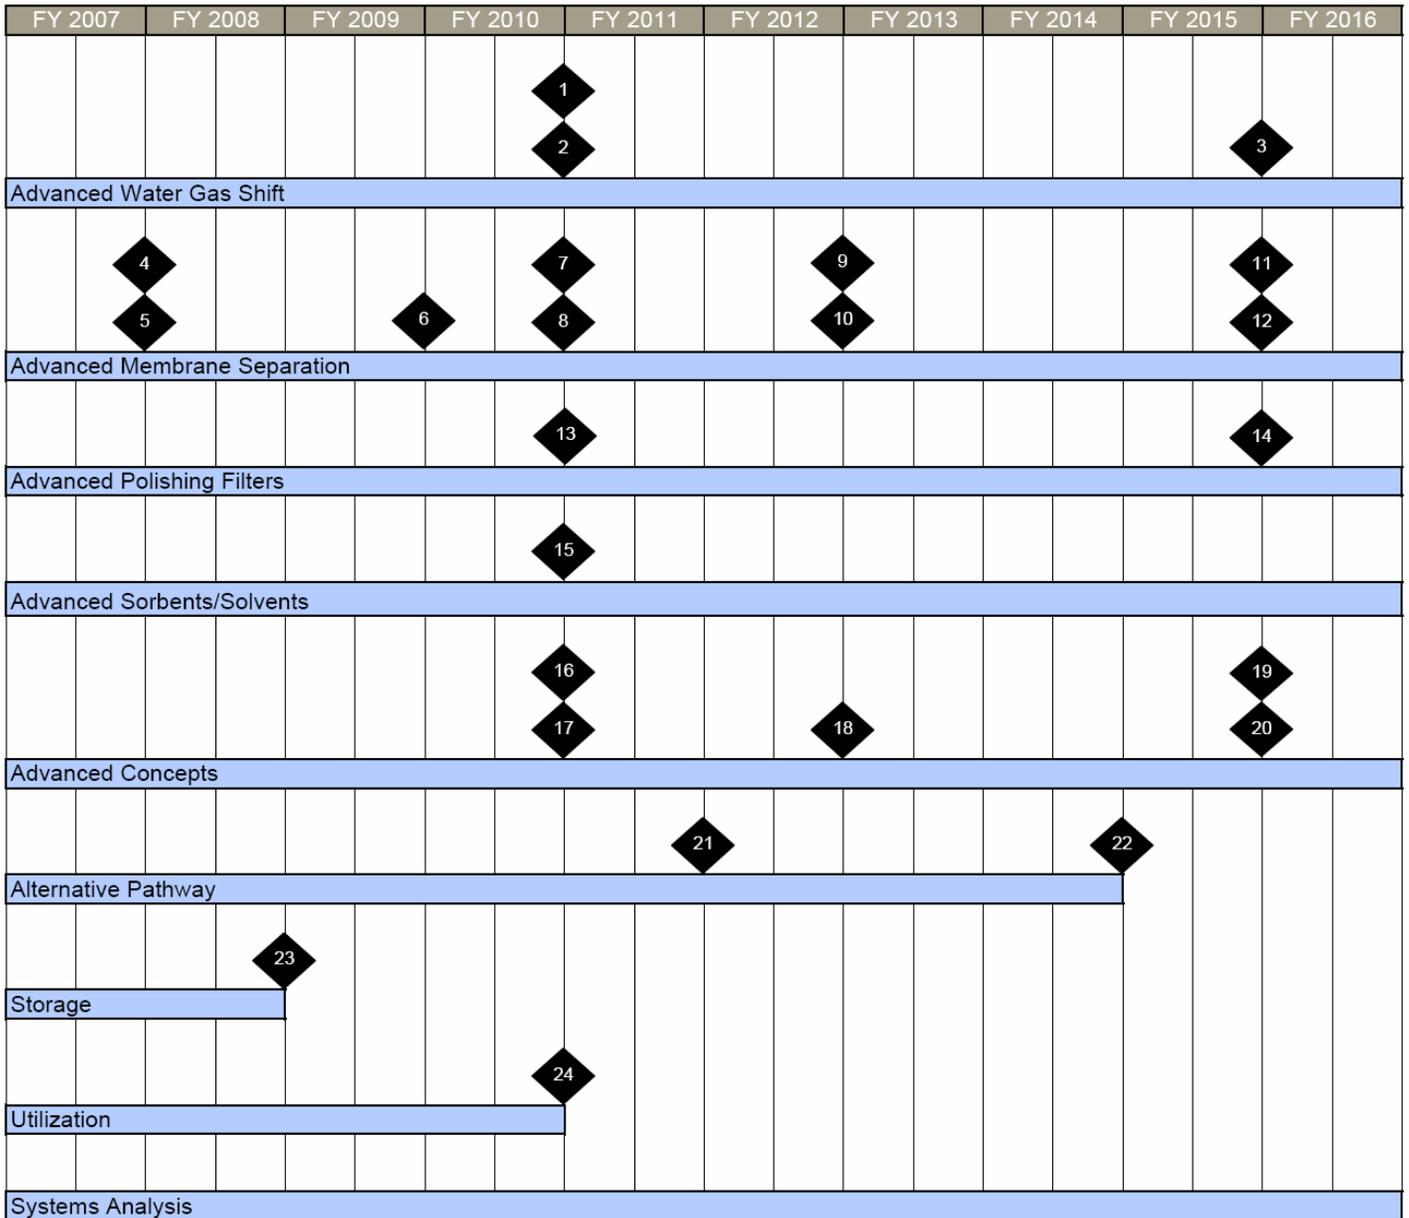

**Key to Figure 11:****Advanced WGS**

1. End of 2010: Go/no-go decision on further development of advanced water-gas shift reaction technologies.
2. End of 2010: Systems analysis verifies achievement of 2010 technical targets.
3. End of 2015: Systems analysis verifies achievement of 2015 technical targets.

**Advanced membrane separations**

4. End of 2007: Down-select most promising membrane separation technologies. COMPLETED.
5. Beginning of 2008: Initiate pre-engineering scale development of 1<sup>st</sup> generation membrane separation technology. COMPLETED.
6. Beginning of 2010: Initiate engineering-scale design of 1<sup>st</sup> generation membrane separation technology. COMPLETED.
7. End of 2010: Systems analysis verifies achievement of 2010 technical targets.
8. Beginning of 2011: Initiate pre-engineering of 2<sup>nd</sup> generation module.
9. Beginning of 2013: Integrate and test 1<sup>st</sup> generation membrane separation technology in advanced coal facility.
10. Beginning of 2013: Initiate engineering-scale design and construction of 2<sup>nd</sup> generation advanced hydrogen production and separation technologies.
11. End of 2015: Systems analysis verifies achievement of 2015 technical targets.
12. Beginning of 2016: Integrate 2<sup>nd</sup> generation advanced hydrogen production and separation technologies into advanced co-production facilities.

**Advanced polishing filters**

13. End of 2010: Verify achievement of targets for gas turbines and SOFCs.
14. End of 2015: Verify achievement of targets for PEM fuel cells.

**Advanced sorbents/solvents**

15. End of 2010: Down-select most promising advanced sorbents/solvents for further development.

**Advanced concepts/process intensification**

16. End of 2010: Identify and down-select most promising advanced concepts for further development.
17. End of 2010: Initiate pre-engineering scale development of 1<sup>st</sup> generation advanced concepts.
18. Beginning of 2013: Initiate engineering-scale design and construction of advanced concepts.
19. End of 2015: Verify achievement of 2015 technical targets for advanced separations.
20. Beginning of 2016: Integrate engineering-scale advanced concepts into co-production facility.

**Alternative Pathway**

21. End of 2011: Determine the most feasible alternate hydrogen from coal pathway(s) and reforming system(s) for producing hydrogen-rich liquid fuels and SNG that are able to meet the hydrogen cost target.
22. End of 2014: Optimize, integrate, and make available an alternate hydrogen production pathway and reforming system to produce decentralized hydrogen from coal.

**Storage**

23. End of 2008: Successfully complete laboratory/bench-scale research on promising novel hydrogen storage systems. COMPLETED.

**Utilization**

24. End of 2010: Successfully complete research to modify and optimize advanced engine types fueled by hydrogen and/or hydrogen-natural gas mixtures.

## 4.1. Central Production Pathway

A hydrogen from coal process, in a carbon-constrained world, requires development of technologies that can reduce the cost of producing high-purity hydrogen from coal while generating sequestration-ready CO<sub>2</sub> streams. The initial step to produce hydrogen from coal involves coal gasification to produce synthesis gas. This gas, requiring subsequent cleaning, is mainly a mixture of hydrogen and carbon monoxide, with some CO<sub>2</sub>, sulfur, particulate matter, and trace impurities. The resulting clean synthesis gas is shifted to produce more hydrogen in the WGS reactors. Hydrogen, CO<sub>2</sub>, and trace components are separated for final use, or captured for sequestration in the case of CO<sub>2</sub>.

FE's Office of Clean Coal (OCC) and its implementing arm, the National Energy Technology Laboratory's (NETL) Strategic Center for Coal have R&D activities on coal gasification and carbon sequestration technologies to improve the efficiency of power production and to reduce the environmental impact of coal use. These gasification, sequestration, gas turbine, and fuel cell development efforts are not part of the Hydrogen from Coal Program, but instead are technologies under development in other OCC and NETL programs. Therefore, R&D efforts in these research areas represent associated rather than direct elements of the Hydrogen from Coal Program.

The focus of the Hydrogen from Coal Program RD&D efforts is on those technologies that employ WGS, separation, and purification of hydrogen from coal-derived synthesis gas, including process intensification efforts that reduce processing steps, combine functions, and significantly improve efficiency and costs. Today's unit operations are effective but also are expensive and energy-intensive. For example, in conventional systems, the initial cleaning step requires the synthesis gas to be cooled from more than 1,800 °F as it leaves the gasifier, to ambient temperature for gas cleanup. Following cleaning, the synthesis gas must then be re-heated to 650–700 °F for the first of two WGS reactors for production of additional hydrogen. Hydrogen is subsequently separated and purified from the mixed gas stream.

Technology that can combine one or more of these steps without the inefficiency of cooling and reheating will make the process more efficient and cost effective. Novel technologies could be developed that combine the processes into one step (*i.e.*, process intensification technology), and also remove impurities such as sulfur and CO<sub>2</sub> into one stream that can be jointly sequestered.

### 4.1.1. Goal and Milestones – Central Production Pathway

**Goal:** By the end of 2016, prove the feasibility of a 60 percent efficient, near-zero emissions, coal-fueled hydrogen and power co-production facility that reduces the cost of hydrogen by 25 percent compared to current coal-based technology.<sup>9</sup>

**Milestones:**

- By the end of 2007, down-select the most promising membrane separation technologies (COMPLETED).
- By the end of 2010, make a go/no-go decision on further development of advanced WGS reaction technologies.
- By the end of 2013, complete development of pre-engineering modules for producing high-purity hydrogen.

---

<sup>9</sup> Overall efficiency depends on product mix (*i.e.*, electricity and hydrogen). The 60 percent efficient facility is based on the product mix in Case 3 in Section 3.2 of the RD&D Plan.

- By the end of 2015, complete design and construction of engineering scale modules for hydrogen production from a coal gasification combined-cycle co-production plant.
- By the end of 2016, demonstrate hydrogen modules integrated into a near-zero emission plant producing hydrogen and electric power with sequestration at a 25 percent lower cost (to produce hydrogen).

#### 4.1.2. Activities – Central Production Pathway

Table 2 lists some of the RD&D activities of the Hydrogen from Coal Program that are under investigation.

**Table 2. Relevant Current R&D Program Activities**

Category	Technology
<i>Pure metallic membranes</i>	<ul style="list-style-type: none"> <li>• Palladium and palladium alloy membrane reactors</li> <li>• Manufacturing techniques for palladium and palladium alloy membranes</li> <li>• Non-precious metal membranes</li> </ul>
<i>Cermet membranes</i>	<ul style="list-style-type: none"> <li>• Ceramic-metal composite membranes</li> <li>• Fabrication and manufacturing of cermet membranes</li> </ul>
<i>Microporous membranes</i>	<ul style="list-style-type: none"> <li>• Carbon molecular sieves</li> <li>• Inorganic membranes</li> <li>• Metal-composite membranes</li> <li>• Fabrication methods</li> </ul>
<i>Reverse selective hydrogen separation membranes</i>	<ul style="list-style-type: none"> <li>• Nanocomposite membranes for reverse selective separation</li> </ul>
<i>Process intensification</i>	<ul style="list-style-type: none"> <li>• Combined WGS and CO<sub>2</sub> selective membranes</li> <li>• Combined WGS and hydrogen separation membrane that is contaminant tolerant</li> <li>• High-temperature shift catalyst integrated with a palladium alloy membrane</li> </ul>
<i>Non-membrane-based technologies</i>	<ul style="list-style-type: none"> <li>• Combined WGS and CO<sub>2</sub> sorbent reactor</li> <li>• Iron-calcium cycle process to produce hydrogen and sequestration-ready CO<sub>2</sub></li> <li>• CO<sub>2</sub> sorbent process to produce hydrogen and simultaneously capture CO<sub>2</sub></li> <li>• Advanced solvent systems</li> </ul>

Both FE and NETL have acquired extensive research experience in all aspects of producing hydrogen from coal through their participation in the Advanced Power Systems, Ultra-clean Fuels, and Advanced Research programs. Exploratory research previously sponsored by FE and NETL has pioneered studies on palladium-copper alloy membranes; tested novel membranes with regard to flux, durability, and impurity resistance; evaluated WGS kinetics and advanced reactor systems; and explored new concepts and fundamental studies on novel separation systems.

#### 4.1.3. Technologies – Central Production Pathway

The Central Production Pathway technologies within the Hydrogen from Coal Program are provided in the list below and discussed in further detail in the denoted section of the MYP.

4.1.3.1 Advanced WGS reaction systems


4.1.3.2 Advanced membrane separation systems (for hydrogen separation)

- Microporous membranes

- Metallic, metal alloys, and hydrogen permeable cermets
- 4.1.3.3 Reverse selective hydrogen separation systems
- 4.1.3.4 Polishing filters (ultra-clean hydrogen purification systems)
- 4.1.3.5 Advanced adsorption/solvent systems
- 4.1.3.6 Advanced concepts
- Intensified processes for gas cleanup, WGS, and hydrogen separation systems
  - Chemical looping
- 4.1.3.7 Delivery & infrastructure for hydrogen from coal central production facilities

#### **4.1.3.1. Advanced WGS Reaction Systems**

Partial oxidation of coal and other carbon-based solid/liquid feedstocks produces a synthesis gas with a composition ranging from 30–45 percent H<sub>2</sub>, 35–55 percent CO, and 5–20 percent CO<sub>2</sub> (dry basis). If the H<sub>2</sub>-to-CO ratio of the syngas from the gasifier is not appropriate for the synthesis of fuels or chemicals, the ratio can be adjusted using the WGS reaction. The WGS reaction converts CO and H<sub>2</sub>O to CO<sub>2</sub> and H<sub>2</sub>:



This reaction also is used to increase the concentration of hydrogen in the syngas, and when coupled with an appropriate separation technology, it can produce high yields of high-purity hydrogen.

The WGS reaction is reversible, with the forward WGS reaction being mildly exothermic. Conversion to H<sub>2</sub> and CO<sub>2</sub> is thermodynamically limited and favored at lower temperatures. Higher temperatures improve the rate of reaction, but decrease the yield of hydrogen. In order to achieve high yields at high rates of reaction, the reaction is typically carried out in multiple adiabatic reactor stages, with lower reactor inlet temperatures in the latter stages. The yield also may be improved by using excess steam or by removing hydrogen to shift the WGS equilibrium to the right. Steam also is used to minimize undesirable side reactions that compete with the WGS reaction.

One or two staged reactors are typically employed in commercial WGS technology to produce hydrogen by steam reforming of natural gas. Commercial catalysts have been developed to achieve optimum performance in the different stages and are summarized in Table 3. Only fixed-bed reactors are currently used in commercial applications with these catalysts. Multiple reactors with inter-cooling are used to optimize the WGS reaction temperature profile. Steam reforming plants typically employ either a two-stage system using high (Fe/Cr) and low (Cu/Zn) temperature shift catalysts in series, or a single stage with high- or medium-temperature shift catalyst followed by a PSA hydrogen separation system. Partial oxidation plants used to gasify oils, coke, and coal employ multiple reactor stages using either the high-temperature or sour gas (Co/Mo) shift catalyst in all beds. No gas cleanup is required upstream of the WGS reactors with the sour gas shift catalyst. For low-temperature shift, catalyst life is limited due to loss of activity. For high-temperature shift, catalyst life is limited due to increases in pressure drop and loss of activity. Technology options for residual CO cleanup/H<sub>2</sub> purification include methanation (old), PSA (current), and polymer membranes (new). Possible impurities in the product hydrogen are CO, CO<sub>2</sub>, CH<sub>4</sub>, and higher hydrocarbons, as well as methanol.

**Table 3. Performance of Commercial WGS Catalysts**

Performance Criteria	Units	Low-/Medium-temperature Shift	High-temperature Shift	Sour Gas Shift
Catalyst form	-	Pellets	Pellets	Pellets
Active metals	-	Cu/Zn & Cu/Zn/Al	Fe/Cr	Co/Mo
Reactor type	-	Multiple fixed beds (last bed)	Multiple fixed beds	Multiple fixed beds
Temperature <sup>a</sup>	°C	200–270/300	300–500	250–550
Pressure	psia	~450	450–750	~1,100
CO in feed	-	Low	Moderate to high	High
Residual CO	%	0.1–0.3	3.2–8	0.8–1.6
Approach to equilibrium	°C	8–10	8–10	8–10
Min steam/CO ratio	Molar	2.6	2.8	2.8
Sulfur tolerance	ppmv	<0.1	<100	>100 <sup>b</sup>
COS conversion	-	No	No	Yes
Chloride tolerance	-	Low	Moderate	Moderate
Stability/durability	Years	3–5	5–7	2–7

<sup>a</sup> Lower temperature limit is set by water dew point at pressure.

<sup>b</sup> Sulfur is required in the feed gas to maintain catalyst activity.

In summary, the advantages of low-/medium-temperature shift processes are:

- WGS equilibrium favors hydrogen production at low temperatures, maximizing hydrogen yield.
- Undesirable side reactions like F-T synthesis are minimized.
- Processes integrate well with conventional gas cleanup technologies that produce hydrogen at near-ambient temperatures and pipeline pressures (400 psi); minimal or no reheat required.
- Temperature range overlaps ranges for advanced gas cleanup processes for sulfur, mercury, etc.
- Processes can be coupled with newer preferential oxidation (PrOx) technologies to produce very low CO in the hydrogen product.
- Steam requirements are low.

The disadvantages are:

- WGS kinetics are more favorable at higher temperatures.
- Low-temperature shift catalysts are easily poisoned.
- Temperature range is below the range of metal and ceramic membranes that could be used for separation.
- Copper (Cu) in catalyst promotes methanol side reaction (methanol emissions from hydrogen plants are regulated by the U.S. Environmental Protection Agency (EPA)).
- Any condensation of water in the reactor will irreversibly damage the catalyst.

The advantages of high-temperature shift processes are:

- WGS kinetics improve with higher temperatures.
- Processes can operate at very high pressures (~1,000 psi).
- Catalysts exhibit greater tolerance for potential poisons.

- Temperature range is consistent with metal and ceramic membranes.

The disadvantages are:

- WGS equilibrium is less favorable at higher temperatures.
- Undesirable side reactions (F-T synthesis) are favored at higher temperatures.
- Steam requirement increases with temperature, both to improve equilibrium and minimize side reactions.
- Hexavalent chromium (from the catalyst) presents a wastewater treatment and catalyst disposal issue.

WGS catalysts and reactors could be improved by further R&D to increase hydrogen yield at higher operating temperatures, improve catalyst tolerance of syngas impurities, minimize undesirable side reactions, expand pressure and temperature operating ranges, and simplify/combine processing steps to reduce costs.

#### *4.1.3.2. Advanced Membrane Separation Systems*

Modern gasification and WGS technology produce synthesis gas, a mixture of H<sub>2</sub>, CO, CO<sub>2</sub>, and other chemical compounds. There are several gas separation technologies that could separate constituents of the synthesis gas (syngas), mainly H<sub>2</sub> and CO<sub>2</sub>, and that could supply O<sub>2</sub> from air for gasification reactions. The Hydrogen from Coal Program seeks to develop technologies to improve the separation of H<sub>2</sub> and/or conversely, CO<sub>2</sub> from synthesis gas streams that will reduce capital and operating costs and improve thermal efficiency and environmental performance. Membranes to separate O<sub>2</sub> from air are being developed in the OCC Gasification Technologies Program.

Current hydrogen recovery methods typically employ pressure swing adsorption (PSA), cryogenics, or polymer membrane systems. Each of these technologies has limitations: PSA typically recovers less of the feed-stream hydrogen and is limited to modest temperatures; cryogenics is generally used only in large-scale facilities with liquid hydrocarbon recovery because of its high capital cost; and current polymer membrane systems are susceptible to chemical damage from H<sub>2</sub>S and aromatics, as well as having limited temperature tolerance.

There are significant opportunities to make advancements in these separations with the development of various types of advanced membranes that can separate hydrogen from CO<sub>2</sub>, advanced solvent systems, and other advanced systems such as reverse selective hydrogen separation membranes (which separate CO<sub>2</sub> and other mixed gases leaving a concentrated hydrogen stream) and low-temperature hydrate processes that can separate CO<sub>2</sub> from hydrogen. Much of the work will develop technology modules that are efficiently integrated into the plant systems, and optimized with the temperature and pressure requirements of the plant and the specifications of the product for delivery.

Advancements in hydrogen membrane separation technologies have the potential to reduce costs, improve efficiency, and simplify hydrogen production systems. Desirable characteristics of separation membranes are high hydrogen flux at low pressure drops; tolerance to contaminants, especially sulfur and CO; low cost; and operation at system temperatures of 250–500 °C. Many current hydrogen membrane technologies are at the research phase, but because of their characteristics, they have the potential to provide hydrogen purity above 99.99 percent.

Membranes can be classified as organic, inorganic, or hybrid (a mixture of organic and inorganic materials). Within each of these classes, membranes can be characterized based on their properties. The Hydrogen from Coal Program currently is focused on microporous and metallic membranes, which

include pure metal and hydrogen-permeable ceramic-metal membranes (i.e., cermets). The program previously included dense ceramic membranes (and also non-hydrogen permeable cermets) as part of its research activities. Dense ceramic membranes separate hydrogen from mixed gas streams by transferring hydrogen ions (i.e., protons) and electrons through the membrane matrix. These membranes have interesting characteristics such as high-temperature operation, mechanical stability, and very high hydrogen selectivity. However, hydrogen flux rates are low at gasifier effluent and gas clean-up technology operating conditions, which would significantly increase the cost of the separation module. Therefore, the program is de-emphasizing RD&D activities on dense ceramic membranes.

A brief characterization of the current membrane technologies being developed by the Hydrogen from Coal Program is provided below. Other membranes are not precluded, provided they show potential to meet the technical targets and help the Hydrogen from Coal Program meet its goals and milestones.

- **Microporous Membranes** – These membranes are microporous filters that separate molecules through a molecular diffusion transport mechanism determined by the pore diameter and particle size. Flux increases linearly with increasing pressure, and there is usually a strong dependence of flux increase with higher temperatures. Materials such as ceramics, graphite, or metal oxides can be used in making these membranes. These materials provide significant thermal and chemical stability in harsh operating environments. The pores in the membrane may vary between 0.5 nanometers (nm) and 5 nm.
- **Metallic Membranes** – These membranes include pure metal or metal alloys, and hydrogen permeable cermets. The flux for these membranes is proportional to the differences of the square roots of the partial pressures across the membrane. Because of the transfer mechanism involved, 100 percent pure hydrogen can be recovered. A description of the two metallic membrane sub-types is provided below.
  - **Pure metal and metal alloy membranes.** Pure metal and metal alloy membranes transport gaseous hydrogen via an atomic mechanism whereby the metal or metal alloy, usually made with palladium (Pd), dissociates the molecular hydrogen into atoms that pass through the Pd metal film, and the atoms recombine into hydrogen molecules on the other side of the membrane. These metallic membranes typically comprise metal composites, thin Pd, or a Pd-alloy metal layer supported on an inexpensive, mechanically strong support. The hydrogen diffuses to the metal surface where dissociative chemisorption occurs, followed by absorption into the bulk metal and diffusion through the metal lattice and recombination into molecular hydrogen at the opposite surface, and finally diffusion away from the metal membrane. These micro-thin metallic films are poisoned by gaseous impurities like sulfur compounds and carbon monoxide, and at high temperatures they undergo phase changes that significantly reduce the hydrogen flux. Alloying with other metals like copper and silver reduces this phase change propensity.
  - **Hydrogen permeable cermet.** In the second type of metallic membrane, a dense mixed conducting ceramic matrix phase is combined with a hydrogen-permeable metallic second phase. This metallic phase, which is composed of a hydrogen permeable metal or metal alloy, functions in the same way as the metallic membranes described previously. In this mixed membrane, the mechanism of hydrogen transfer is a combination of proton and electron conductivity in addition to atomic hydrogen transfer. However, atomic hydrogen transfer is orders of magnitude greater than the contribution of proton and electron conductivity, and thus the overriding mechanism in estimating the flux. Therefore, the flux for this membrane is more closely related to that of metallic membranes (i.e., represented by the difference in the square roots of the partial pressures). The membranes can operate at temperatures in the range

of 400–600 °C, and can produce 100 percent pure hydrogen because of the transfer mechanism involved. These ceramic/metal composites offer the potential to overcome many of the limitations of metal membranes. This includes inhibition of phase change and increased tolerance to impurities in the synthesis gas.

Table 4 shows the current performance characteristics for hydrogen permeable cermet membranes under development by FE and NETL. As discussed under the technical targets in section 4.1.4.2, some of these performance metrics are approaching the desired flux rates of about 300 ft<sup>3</sup>/hr/ft<sup>2</sup> at 100 psi  $\Delta$ P hydrogen partial pressure and the desired operating temperature range of 250-550 °C. However, other characteristics, such as the ability to withstand harsh chemical environments and desired durability, have not yet been demonstrated.

**Table 4. Examples of Current Status of Membrane Development Activities Sponsored by FE and NETL**

Membrane Type	Units	Hydrogen permeable cermet
Flux <sup>a</sup>	ft <sup>3</sup> /hour/ft <sup>2</sup>	~220
Temperature	°C	300–400
Sulfur tolerance	ppmv	~20
Cost	\$/ft <sup>2</sup>	<200
Potential timing <sup>b</sup>	Years	10+ years
$\Delta$ P Estimated <sup>c</sup>	psi	100
$\Delta$ P Function	-	Square root

<sup>a</sup> For 100 psi  $\Delta$ P (hydrogen partial pressure basis).

<sup>b</sup> Potential timing for development.

<sup>c</sup>  $\Delta$ P Estimated – all flux rates have been corrected to an estimated 100 psi  $\Delta$ P (hydrogen partial pressure basis) across the membrane at 50 psia on the permeate or sweep side.

### *The Relationship between Membrane Flux and Partial Pressure of Hydrogen*

With some exceptions, most hydrogen separation membrane research is in the laboratory research phase. Therefore, most of the current information on membranes, particularly the flux, is based on observed data under specifically controlled experiments that may not reflect real-world operating conditions in a hydrogen from coal production facility. However, based on scientific and engineering theory and observation data in the laboratory, estimates of the hydrogen flux at desired operating pressures can be determined.

As previously mentioned, membrane flux is dependent upon the partial pressure of hydrogen, and the relationship between the two differs depending upon the type of membrane. Specifically, microporous membranes exhibit a flux that is directly proportional to the hydrogen partial pressure differential across the membrane. In metal or hydrogen-permeable cermet membranes, the flux is proportional to the difference in the square roots of the partial pressures or the natural log of the partial pressure gradient according to Sieverts' Law. In dense ceramic and non-hydrogen permeable cermets, flux is proportional to the natural log of the pressure gradient across the membrane, based on the Nernst potential.

Flux rates need to be converted from observed experimental results to desired operating pressure conditions to evaluate their status relative to technical targets. Table 5 shows these mathematical relationships for the different membrane types.

**Table 5. Relationships for Flux as a Function of Hydrogen Partial Pressure Differentials for Different Membrane Types**

Membrane Type	$\Delta P$ function	Equation
Microporous	Linear	$\text{Flux}_{\text{est M}} = \text{Flux}_{\text{obs M}} * (\Delta P_{\text{est}} / \Delta P_{\text{obs}})$
Pure metallic (includes pure metal and metal alloys)	Square root	$\text{Flux}_{\text{est P}} = \text{Flux}_{\text{obs P}} * \left[ \frac{(\text{Pf}_{\text{est}}^{0.5} - \text{Ps}_{\text{est}}^{0.5})}{(\text{Pf}_{\text{obs}}^{0.5} - \text{Ps}_{\text{obs}}^{0.5})} \right]$
Hydrogen-permeable cermet	Square root	$\text{Flux}_{\text{est P}} = \text{Flux}_{\text{obs P}} * \left[ \frac{(\text{Pf}_{\text{est}}^{0.5} - \text{Ps}_{\text{est}}^{0.5})}{(\text{Pf}_{\text{obs}}^{0.5} - \text{Ps}_{\text{obs}}^{0.5})} \right]$
Dense ceramic	Natural logarithm	$\text{Flux}_{\text{est D}} = \text{Flux}_{\text{obs D}} * \left[ \frac{\ln(\text{Pf}_{\text{est}} / \text{Ps}_{\text{est}})}{\ln(\text{Pf}_{\text{obs}} / \text{Ps}_{\text{obs}})} \right]$
Dense ceramic with non-hydrogen permeable second phase (electron conducting)	Natural logarithm	$\text{Flux}_{\text{est D}} = \text{Flux}_{\text{obs D}} * \left[ \frac{\ln(\text{Pf}_{\text{est}} / \text{Ps}_{\text{est}})}{\ln(\text{Pf}_{\text{obs}} / \text{Ps}_{\text{obs}})} \right]$

$\text{Flux}_{\text{est M}}$  is the estimated flux for microporous membranes.

$\text{Flux}_{\text{obs M}}$  is the observed, or tested, flux for microporous membranes.

$\Delta P_{\text{est}}$  is the  $\Delta P$  of hydrogen partial pressure to be estimated.

$\Delta P_{\text{obs}}$  is the observed, or tested, hydrogen partial pressure.

$\text{Flux}_{\text{est P}}$  is the estimated flux for hydrogen permeable metallic, metal alloy, or cermet membranes.

$\text{Flux}_{\text{obs P}}$  is the observed, or tested, flux for hydrogen permeable metallic, metal alloy, or cermet membranes.

$\text{Pf}_{\text{est}}$  is the estimated feed side hydrogen partial pressure.

$\text{Ps}_{\text{est}}$  is the estimated sweep (permeate) side hydrogen partial pressure.

$\text{Pf}_{\text{obs}}$  is the observed, or tested, feed side hydrogen partial pressure.


$\text{Ps}_{\text{obs}}$  is the observed, or tested, sweep (permeate) side hydrogen partial pressure.

$\text{Flux}_{\text{est D}}$  is the estimated flux for dense ceramic or non-hydrogen permeable cermet membranes.

$\text{Flux}_{\text{obs D}}$  is the observed, or tested, flux for dense ceramic or non-hydrogen permeable cermet membranes.

Figure 12 shows the effect of changes in partial pressure on the flux of hydrogen membranes. This graph is based on a reference assumed flux of  $60 \text{ ft}^3 \text{ hour}^{-1} \text{ ft}^{-2}$  with a hydrogen partial pressure  $\Delta P$  of 20 psi and an assumed sweep (permeate) side hydrogen partial pressure of 1 psi for all membrane types. For commercial applications, the sweep, or permeate, side hydrogen partial pressure is assumed to be 50 psi.

One of the key conclusions observed from Figure 12 is that it is important to set desired technical targets near the expected operating conditions. In the case of hydrogen from coal technologies, hydrogen separation membranes are expected to operate with at least 50 psi hydrogen partial pressure on the permeate side and a hydrogen partial pressure  $\Delta P$  of 100–300 psi is expected. For example, when converting assumed observed test data from a  $\Delta P$  of 20 psi and a permeate side partial pressure of 1 psi to operating conditions of 100 psi  $\Delta P$  and 50 psi permeate side, a decline in flux for dense ceramic membranes is seen, a slight increase for Pd-type, but a linear improvement related to  $\Delta P$  for microporous membranes.

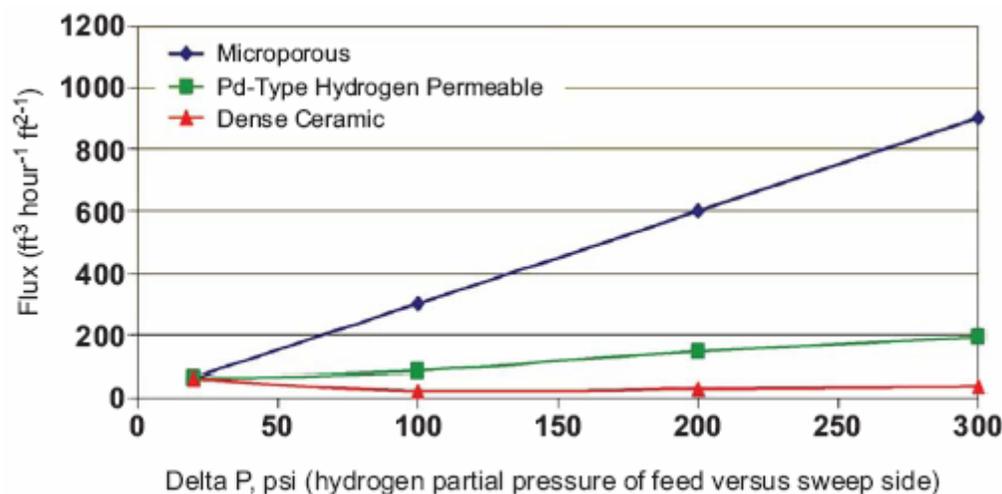Figure 12. Ideal Effect of Changes in  $\Delta P$  on Flux of Hydrogen Membranes

In addition to hydrogen partial pressure, other operating conditions such as temperature and quality of the feed stream can also influence hydrogen flux. Membrane attributes such as durability, cost, tolerance to contaminants, hydrogen recovery, and purity are also important factors in development of robust membranes that can be integrated into coal-based hydrogen production facilities.

To ensure that the many types of membrane technologies and concepts being researched are on a consistent basis, NETL has developed a standardized testing protocol for hydrogen separation membranes. The testing protocol serves to accomplish a number of objectives with respect to the Hydrogen from Coal Program technical targets. Some of these objectives are: to clearly state expectations to contractors, determine the effectiveness, of each membrane on a common basis, and to assess the membrane's compatibility with current gasification operation conditions.

#### 4.1.3.3. Reverse Selective Hydrogen Separation Systems

Removal of CO<sub>2</sub> from the process stream provides another method to separate H<sub>2</sub>. CO<sub>2</sub> can be separated from syngas through commercially available CO<sub>2</sub> absorption systems as is being done at the Great Plains Project in North Dakota. These are continuous scrubbing systems that typically are available as three basic types: chemical, physical, and hybrid. All the processes operate in essentially the same manner by scrubbing the mixed gas in absorption towers to collect the CO<sub>2</sub>, and then regenerating the solvent and releasing the CO<sub>2</sub>. After separation, the CO<sub>2</sub> stream is dried, compressed, and transported to a utilization site (e.g., enhanced oil recovery) or to a sequestration site (e.g., abandoned oil well).

The objective of advanced CO<sub>2</sub> separation technologies is the efficient, low-cost removal of CO<sub>2</sub> and other trace impurities from hydrogen-CO<sub>2</sub> mixtures. If hydrogen is the product gas, separation of trace impurities with the CO<sub>2</sub> may be a preferred option. These technologies include membranes, CO<sub>2</sub> hydrates, and improved adsorbent/solvent systems. Nanostructured, polymeric membranes that are embedded with nanoparticles to modify the gas transport properties of the base polymer, show potential to achieve the desired selective CO<sub>2</sub> separation. These polymeric membranes are referred to as reverse

selective membranes that can also be incorporated with amine groups to facilitate H<sub>2</sub>S and CO<sub>2</sub> removal.<sup>10</sup>

CO<sub>2</sub> sorbents and hydrates are examples of other options which could be explored that selectively remove CO<sub>2</sub> from mixed gas streams. Sorbents work by adsorbing CO<sub>2</sub> gas molecules onto the surface of a solid. Commercial processes are available, but they are expensive and energy-intensive, operate at cold gas temperatures, and have low CO<sub>2</sub> sorption capacity. New CO<sub>2</sub> sorbents have the potential to remove CO<sub>2</sub> at warm gas temperatures (250–350 °C), which is ideal for gasification systems. Also, these new sorbents could remove CO<sub>2</sub> at WGS temperature conditions without additional cooling. However, no sorbents that are regenerable and operate at warm gas temperatures are commercially available.

CO<sub>2</sub> hydrates remove CO<sub>2</sub> by forming a crystalline lattice around the gas molecule, subsequently trapping the molecule. The solid hydrate is formed by reducing the temperature of the synthesis gas stream to 34 °F at pressures ranging from 500–600 psi. Water nucleates and surrounds the CO<sub>2</sub> molecule, trapping it within the crystalline lattice of the hydrate. The solid hydrate, contained within a slurry, is removed and heat is added to release the CO<sub>2</sub> molecule. The process shows promise but must be further researched and demonstrated to continuously control production of hydrates, and to gain an understanding of system integration issues.

#### ***4.1.3.4. Polishing Filters (Ultra-clean Hydrogen Purification Systems)***

Hydrogen produced from coal can be used for various applications, including transportation (in future PEM fuel cells or internal combustion engines), gas turbine and SOFC power generation, and crude oil refining. The hydrogen purity requirement is dependent on the applications in which it is used. PEM fuel cells, which may be used in future fuel cell vehicles, require the most stringent standards with CO levels below 10 ppm and sulfur levels below 10 parts per billion (ppb). A polishing filter device, possibly adjacent to the end use, may be required to meet the particular hydrogen quality level based on the application requirement. R&D efforts are focused on identifying materials and processes that can be used as polishing filters to reduce multiple contaminants to the application target levels specified in Section 4.1.4.3.

#### ***4.1.3.5. Advanced Adsorption/Solvent Systems***

Advanced adsorption (i.e., advanced PSA) and other solvent systems have the potential to improve current hydrogen separation technologies. These technologies can help lower the cost of current hydrogen separation from large centralized coal plants until membrane technologies become commercially available. These technologies may include novel catalysts, adsorbers, or solvents that make current technologies more efficient, improve environmental performance, increase operating capacity, and reduce operating and maintenance costs. In future versions of this MYP, advanced adsorption/solvent systems may have a greater emphasis since they build on current technology.

#### ***4.1.3.6. Advanced Concepts***

The Hydrogen from Coal Program is investigating advanced concepts through process intensification. Process intensification is the concept of developing novel technologies that, compared to current technology, bring about dramatic improvements that lead to more compact, energy efficient, and lower cost technologies. As related to hydrogen production from coal, these concepts could be a “one-box” process that combines synthesis gas cleanup, the WGS reaction, and hydrogen separation. Others

---

<sup>10</sup> Winston Ho, “Development of Novel Water-Gas Shift Membrane Reactor,” Paper presented at the Hydrogen, Fuel Cells, and Infrastructure Technology Program Review Meeting, May 19–22, 2003.

include new process control methods or novel concepts that integrate alternative energy sources into the hydrogen from coal production facility. These advanced concepts will require long-term research efforts before they are ready for larger-scale development, but could significantly improve the production of hydrogen from coal. One concept being developed involves integrating the WGS reaction with hydrogen membrane separation.

Advanced WGS reactors are being developed to use sulfur-tolerant catalysts that produce more hydrogen from synthesis gas at lower cost. Membrane reactors have been identified as a potentially beneficial technology for use in new WGS applications. By combining the reaction with selective removal of one of the reaction products, a single reactor can operate simultaneously at high temperature and high conversion, and possibly without the requirement of excess steam. Conceptually, such a reactor could use a membrane that is highly permeance-selective for either H<sub>2</sub> or CO<sub>2</sub>.

The conditions for WGS in a membrane reactor would be very different from those encountered in a conventional shift reactor. In particular, at higher conversion rates, the partial pressure of steam would be low and the gas phase would be predominantly either CO<sub>2</sub> or H<sub>2</sub>, depending on which species was not removed through the membrane. The catalysts used in conventional WGS reactors have not been extensively studied at these conditions, and it is not known whether they will be suitable for use in membrane reactors.

In either case, membrane reactors are being considered for this application with the expectation that, among other advantages, using a membrane reactor would not require cooling the gasifier product as much as is required in a conventional shift reactor. WGS is a reversible, exothermic reaction, and consequently the conversion is limited at high temperatures by thermodynamic equilibrium. The use of a highly permeance-selective membrane reactor would avoid this problem, driving the reaction to high conversion rates at elevated temperatures by selectively removing either H<sub>2</sub> or CO<sub>2</sub>. While this conceptually removes the limitation on conversion at high temperature, it is unknown what effect it will have upon the rate of reaction or mass transfer limitations. Conducting the WGS reaction over commercial, high-temperature iron oxide catalysts is known to be inhibited by the CO<sub>2</sub> reaction product. While the kinetics are not inhibited by the H<sub>2</sub> reaction product, it is not known whether the active (Fe<sub>3</sub>O<sub>4</sub>) state of the catalyst can be maintained in the situation where CO<sub>2</sub> is removed and where an excess of steam is neither needed nor desired. In a membrane reactor, one or the other of these compositional regimes will be encountered.

Chemical looping is another advanced concept for producing and separating streams of hydrogen and CO<sub>2</sub> from mixed gases and trace constituents. Chemical looping for hydrogen production from coal involves three key steps: hydrogasification, carbonation, and calcination. Hydrogasification converts carbon and hydrogen contained in the coal into methane. Water/steam is used to control the reaction and adjust for different coal types. The methane/water mixture then enters the carbonation vessel where it is reacted with additional water to form CO<sub>2</sub> and hydrogen. Calcium oxide (CaO) or another oxide is added to the vessel and reacts with the CO<sub>2</sub> to form calcium carbonate (CaCO<sub>3</sub>). Hydrogen is removed and can be further purified if necessary. The CaCO<sub>3</sub> then is sent to a calcination reactor where heat is added to break down the CaCO<sub>3</sub> into CaO (which can be recycled back to the carbonation vessel) and CO<sub>2</sub> (which can be stored or sequestered).

#### ***4.1.3.7. Delivery & Infrastructure for Hydrogen from Coal Central Production Facilities***

Cost-effective methods are required to transport hydrogen produced from coal at a centrally located facility to the end user. Hydrogen delivery has the potential to be a major cost contributor to the overall cost of hydrogen produced from coal. Current delivery methods rely on long distance transport by

truck, leading to a delivery cost of \$4-9/kg.<sup>11</sup> Pipeline delivery is estimated to be around \$2/kg, but other costs such as compression and dispensing need to be considered.<sup>12</sup>

Through experience with natural gas delivery systems, it is known that distribution by pipeline is the most cost-effective method of transporting large volumes of gas, which would be the case for centrally produced hydrogen from coal. However, the current hydrogen pipeline infrastructure is very limited and primarily focused on supplying product from gas manufacturing plants to oil refineries for use in petroleum upgrading processes. In addition to an increase in public demand for hydrogen, numerous hurdles must be cleared before investors are willing to construct high cost pipelines. These hurdles include operational issues like hydrogen embrittlement of materials and economic concerns due to high compression and storage costs.

While large-scale, central production of hydrogen from coal will rely heavily on pipelines, trucks will continue to play an important role in the distribution of hydrogen. Trucks can deliver hydrogen as a compressed gas or in liquid form. However, these technologies pose several challenges such as large energy consumption requirements, high cost, and the inability to transport hydrogen economically over long distances.

Table 6 outlines the areas where R&D is necessary to lower the cost and improve the efficiency and reliability of hydrogen delivery systems for central production facilities. A discussion of each research element follows.

**Table 6. Hydrogen Delivery & Infrastructure Research Elements**

<b>Compression</b>	<b>Liquefaction</b>	<b>Storage</b>	<b>Other</b>
<ul style="list-style-type: none"> <li>• Mechanical</li> <li>• Thermal</li> <li>• Electrochemical</li> </ul>	<ul style="list-style-type: none"> <li>• Vapor Compression</li> <li>• Magnetic</li> </ul>	<ul style="list-style-type: none"> <li>• High-pressure Tanks</li> <li>• Liquid Storage Tanks</li> <li>• Reversible Hydrogen Carriers</li> <li>• Geologic</li> </ul>	<ul style="list-style-type: none"> <li>• Materials &amp; Coatings</li> <li>• Leak Detection</li> <li>• Hydrogen/Natural Gas Mixtures</li> </ul>

### *Compression Technologies*

Based on the separation method used to purify it, the hydrogen produced from a coal gasification process leaves the purification stage at pressures of 20–400 psi. However, hydrogen delivery applications require higher pressures, up to 1,500 psi for transmission pipelines and 10,000 psi for tank storage. Current technology for compressing hydrogen to these high pressures is intensive in both capital and energy, and is one of the main contributors to the high price of hydrogen delivery. Three primary compression methods — mechanical, thermal, and electrochemical — are described below.

**Mechanical** — Conventional compressors use mechanical means to increase the pressure of a gas by reducing its volume. In the most basic compressors, a piston is driven into a sealed shaft to compress the gas, which is then released through a valve. Centrifugal compressors are more advanced, and force gas through impellers rotating at up to 50,000 revolutions per minute (rpm) to convert velocity into

<sup>11</sup> *Chemical and Market Reporter*, February 24, 2003.

<sup>12</sup> Department of Energy, *Hydrogen Program Annual Report 2007*.

pressure energy. These compressors are desired for use with hydrogen because they offer a continuous, steady flow of gas and vibrate less than other mechanical compressors.

Mechanical compressors are energy intensive and the movement of parts under high-pressure operation causes wear and tear, leading to high operation and maintenance costs. Mechanical compression is a mature technology, but it has not been completely adapted for use with hydrogen at the pressures and in the capacities required. As typical lubricants used in the compressors can contaminate hydrogen gas, making it unusable in fuel cell applications, new lubricants need to be developed that are compatible with hydrogen but do not reduce functionality. Additionally, any materials, coatings, and leak prevention advances will benefit compression systems by lowering costs and improving efficiency. Due to the large amount of energy required for mechanical compression, small efficiency gains could translate to large savings.

**Thermal** – This technology uses the physical properties of metal hydrides to absorb hydrogen at a lower temperature and pressure. The hydride is then heated with warm water, and as the temperature is increased, hydrogen is released at a higher pressure. Depending on the composition of the hydride alloy, the relationship between temperature and pressure varies. Single stage applications have achieved pressure increases near 500 psi. However, to achieve the high pressures necessary for delivery applications, multiple hydride alloys with varying physical properties must be used in a multi-stage system.

Much like hydrogen separation membranes, it is possible for the hydrides to be either blocked or decayed by various contaminants found in synthesis gas, such as sulfur and carbon monoxide, and additionally, thermal cycling can reduce effectiveness. This highlights the critical importance of reducing contaminant concentrations to very low levels prior to delivery and use of hydrogen. Alternatively, R&D may be required to develop hydride alloys which are resistant to these contaminants while still operating in the correct temperature and pressure ranges. Because these hydrides can supply high-pressure hydrogen using only heating and cooling water, the energy costs are much lower than those associated with mechanical compression. Additionally, thermal compressors have no moving parts, leading to smaller unit volumes and lower maintenance costs.

**Electrochemical** – This technology uses membrane electrode assemblies, similar to those found in PEM fuel cells, to increase the pressure of hydrogen. An electrical potential is applied across the electrode, and hydrogen gas is passed over a catalyst on the anode where it reacts to form two hydrogen ions and two electrons. The hydrogen ions then diffuse across a membrane to the cathode where they are catalytically reduced to hydrogen gas in a limited volume, creating high-pressure gas which is released through a valve. Similar to thermal compressors, this technology has no moving parts, leading to easier maintenance and repairs due to minimal wear and tear.

This technology is currently in its infancy, but shows great potential due to high efficiency and low power requirements. Similar to PEM fuel cells, electrochemical compressors can encounter performance issues unless high-purity hydrogen is used.

### *Liquefaction Technologies*

Although pipelines are viewed as the ideal method to transport hydrogen, issues involving their financing, permitting, and construction suggest a long lead time before an expansive pipeline infrastructure system can be put in place. Until this time, the hydrogen economy will rely on delivery by truck. Additionally, no matter how expansive the pipeline infrastructure, trucks will always be required to move hydrogen from pipeline distribution end points to the end user.

While hydrogen gas has a high energy density by weight, its volumetric energy density is very low. This makes truck transportation costly as limited amounts of hydrogen can be transported during each trip. One method used to solve this issue is to liquefy hydrogen to increase its volumetric energy density. At atmospheric pressure, hydrogen turns to its liquid form at  $-252.8^{\circ}\text{C}$ . There are multiple technologies available to achieve this low temperature, but two primary areas — vapor compression and magnetic liquefaction — are potentially promising areas.

**Vapor Compression** – Classic refrigeration methods involve taking advantage of the thermodynamic properties of compressible gases. A closed loop system cools a process fluid to low temperatures, which then enters a heat exchanger to remove heat from an open loop hydrogen gas stream to liquefy it.

In the most basic refrigeration cycle, a cold process fluid is compressed, creating a gas that is at high temperature and pressure. This gas is then condensed into a high-pressure liquid and expanded across a valve to create a liquid at low temperature and pressure. The liquid enters an evaporator where it forms a low-pressure gas and the cycle starts over again. While it passes through the evaporator, the process fluid temperature is very low, and at this point it contacts the hydrogen gas stream to cool it to the required temperature for liquefaction. Processes that reach the ultra-low temperature required to liquefy hydrogen typically use neon as the refrigerant because it is an inert gas with a lower boiling point than hydrogen.

Because this liquefaction technology relies heavily on vapor compression, it is very energy intensive. However, any advances made to mechanical compressors will improve the efficiency of the process. Thermal and electrochemical compression technologies take advantage of physical and chemical properties specific to hydrogen and cannot be used for the compression of the process fluids needed for this liquefaction process.

**Magnetic** – This technology is based on the magnetocaloric effect, a phenomenon where the temperature of a ferromagnetic metal is changed when a magnetic field is applied. Depending on the material properties, either a negative or positive magnetic field is applied, which aligns the material's dipoles, reducing its entropy. The metal compensates for this loss of entropy by heating up. The magnetic field is then removed, causing the metal to cool and remove heat from the environment.

Historically, this technology has been used in laboratories to reduce temperature from 10K to below 1K, but has not yet been proven for large-scale cooling applications.

The current process uses the metal element gadolinium because it exhibits a strong magnetocaloric effect. However, gadolinium is a rare metal, and large-scale consumption for magnetic refrigeration would likely drive up costs. R&D is required to develop other promising metal alloys that exhibit the magnetocaloric effect to reduce the cost of the system.

### **Materials & Coatings**

A major cost component in the construction of hydrogen delivery components is the cost of raw materials. The global commodity market, including steel, has recently seen a large rise in prices. This rise in material costs has caused a dramatic rise in the total construction cost of pipelines, compressors, storage tanks, and other equipment necessary to distribute hydrogen.

Additionally, hydrogen has been shown to embrittle steel and other materials, leading to cracks and leaks. Under high-pressure operation, these cracks can lead to failure of components. The hydrogen embrittlement mechanism is not currently well understood, but is affected by a variety of factors, including pressure, temperature, hydrogen purity, and other operating conditions.

R&D is required to develop innovative new materials not only to help reduce the capital costs associated with component production, but also to ensure that their integrity is not compromised through embrittlement. Composite materials or new alloys of steel could solve either issue, or potentially both at once. These new materials must be able to withstand the high pressures required for use in a hydrogen delivery system. Storage tanks must be able to withstand pressures of at least 2,000 psi, and even higher pressures are desired to reduce the overall storage volume. Transmission pipelines must handle pressures up to 1,500 psi.

Additionally, it may be possible to coat existing steel materials with coatings that would help eliminate hydrogen embrittlement. PEM fuel cells require high purity hydrogen, so any coating must not contaminate the product to any significant degree.

### *Leak Detection and Control*

Hydrogen is the smallest gas molecule in existence and can diffuse through gaps that other molecules such as natural gas cannot. Large leaks may induce safety hazards, and losing any amount of hydrogen during delivery results in a higher cost for consumers. Leakage is most likely to occur along seams where parts are joined together, such as at fittings, valves, and seals.

Improved welding techniques and fittings made of new composite materials must be developed to minimize hydrogen leakage. Additionally, it is possible that coatings developed to reduce hydrogen embrittlement of steel may also block leakage.

Like pure natural gas, pure hydrogen gas has no odor. However, unlike natural gas, common odorants used for detection cannot be added to hydrogen because they would lower the high purity required for fuel cell applications. It may be possible to develop odorants that can be easily sensed at extremely low concentrations, allowing them to pass through fuel cells. Other leak detection methods rely on palladium, an expensive metal that is easily decayed by other common gases. New leak detection methods must also be developed to help determine the location of leaks for maintenance purposes.

### *Hydrogen Storage Technologies*

Hydrogen produced from coal at centrally located facilities requires storage for transportation by truck, as well as bulk storage capable of meeting daily or seasonal variations in demand at the facility itself (for central power applications) or in the market.

The most common current method of storing gaseous hydrogen is in pressurized steel tanks. Storage pressures are typically greater than 2,000 psi, but could be higher. Hydrogen could also be stored as a cryogenic liquid, which provides higher volumetric density storage compared to compressed gas storage. However, well-insulated vessels are required to minimize hydrogen evaporation/boil-off. A significant amount of energy is also consumed during the liquefaction process. An alternative is to chemically store hydrogen by reacting it with a carrier to form a new compound. This process would increase the amount of hydrogen stored in a specific volume, and the reaction would be reversible to allow the release of hydrogen gas at the desired time. Each of these storage technologies could be viable for both truck delivery and for bulk storage at a central facility.

Hydrogen storage in geologic formations is also an option for bulk hydrogen storage to meet variations in demand. Praxair has developed a hydrogen storage cavern that is integrated with its Gulf Coast

hydrogen pipeline system to increase availability of hydrogen supply for refinery customers.<sup>13</sup> Additionally, geologic formations have been widely used for natural gas storage and are expected to play a major role in storage of carbon dioxide captured from coal facilities.

The addition of hydrogen storage equipment at a central plant will impact the costs of hydrogen production and delivery. Minimizing the amount of hydrogen storage required at facilities will reduce the costs and the footprint while maximizing the volumetric storage density. Some technologies developed for on-board storage applications, which do not meet the stringent targets for size, weight, and volume, may be useful for large, bulk off-board storage where these targets and technical challenges are not as stringent. Some of these technologies may exhibit features that are attractive to bulk storage, such as reduced compression requirements, simpler and safer operation and maintenance, or lower cost.

### *Hydrogen/Natural Gas Mixtures*

Due to concerns about hydrogen embrittlement of steel, pure hydrogen is not widely distributed through the existing energy infrastructure. Also, it is clear that hydrogen embrittlement is exacerbated by high hydrogen concentration. While other elements of the Plan seek to solve this problem by developing new technology to minimize embrittlement, it is also possible to lower the hydrogen concentration by mixing it with natural gas, allowing it to be transported through the current pipeline infrastructure. This mixture could be separated near the end-user or utilized in advanced internal combustion engines as a low emission transportation fuel (See Section 4.5).

#### **4.1.4. Technical Targets – Central Production Pathway**

The technical targets in this RD&D Plan, unless otherwise indicated, represent the status of the specific technologies after completion of R&D, but prior to demonstration of the technologies. These technologies will be validated in modules at facilities that can accommodate similarly scaled engineering modules, as detailed in the Gantt chart in Figure 11. As a point of reference, the status of the technologies is provided in the technical target tables.

It is important to understand the composition of the synthesis gas exiting the gasifier when developing the targets for contaminant levels for both WGS and hydrogen separation technologies. Table 6 shows the contaminant levels in raw and cleaned synthesis gas from Illinois #6 bituminous coal. Additionally, the FE Gasification Technologies Program goals for synthesis gas cleanup are also shown. It should be noted that raw synthesis gas composition will vary by coal type; therefore, lower sulfur coals could have raw synthesis gas sulfur levels that are much lower than that shown in Table 7, perhaps as low as 700–1,200 ppmv based on some studies.<sup>14</sup>

---

<sup>13</sup> Praxair, Inc., *Increase Hydrogen Supply Availability with Cavern Storage*, [http://www.praxair.com/praxair.nsf/0/3A0AB529A089B473852571F0006398A3/\\$file/027847\\_PRAX\\_RefinSpec\\_4\\_1ow\\_res.pdf](http://www.praxair.com/praxair.nsf/0/3A0AB529A089B473852571F0006398A3/$file/027847_PRAX_RefinSpec_4_1ow_res.pdf).

<sup>14</sup> *Impact of CO<sub>2</sub> Capture on Transport Gasifier IGCC Power Plant*, Bonsu, A., et. al., Southern Company Services – Power Systems Development Facility; Booras, G., Electric Power Research Institute (EPRI), Breault, R., NETL; Salazar, N., Kellogg, Brown and Root, Inc., International Technical Conference on Coal Utilization and Fuel Systems, Clearwater, FL, May 21–25, 2006.

**Table 7. Contaminant Levels in Raw and Cleaned Synthesis Gas using Conventional Cleaning Technologies and FE Gasification Program Goals for Synthesis Gas Cleanup**

<b>Contaminant</b>	<b>Units</b>	<b>Raw Synthesis Gas Composition<sup>a</sup></b>	<b>Cleaned Synthesis Gas Composition<sup>a</sup></b>	<b>FE Gasification Program Goals<sup>b</sup></b>
H <sub>2</sub> S	ppmv	9,524	102	0.04
NH <sub>3</sub>	ppmv	675	0.4	1,000
HCl	ppmv	425	~0	< 1
Hg	ppbv	3	0.3	< 1

<sup>a</sup> *Novel Gas Cleaning/Conditioning for Integrated Gasification Combined Cycle: Volume I – Conceptual Commercial Evaluation*, Siemens Power Generation, Inc. and Gas Technology Institute, under DOE Contract DE-AC26-99FT40674, December 2005.

<sup>b</sup> Tennant, J., “Gasification: Ultra Clean & Competitive,” DOE/NSF EPSCoR Conference 2005, Morgantown, WV, June 2005.

As Table 7 shows, most major contaminants can be reduced to very low levels through conventional synthesis gas cleaning technologies, and achieve the goals of the Gasification Technologies Program. If that program’s cleanup goals were achieved, then conventional WGS rather than a sour gas shift to produce additional hydrogen would be preferred. An alternative for advanced systems would be to assume that sulfur can be controlled to about 100 ppmv by use of warm gas cleanup, but without substantial removal of other contaminants such as ammonia, HCl, or mercury below that seen in the gasifier effluent. These contaminants, along with CO<sub>2</sub>, would be simultaneously removed by the separation device and thereby significantly reduce the cost to produce fuel cell-grade hydrogen for transportation applications. The 2015 targets for WGS and membrane separation assume tolerances for the identified contaminants consistent with this methodology. However, under the current cleaned synthesis gas composition, sulfur levels in the form of H<sub>2</sub>S are considerably higher than the Gasification Technologies Program goal and would require a sour gas shift that might affect advanced hydrogen membrane separators as well as PEM or other fuel cell technologies (as shown in the Advanced Polishing Filter Technical Targets – Table 10).

To reiterate, it is also expected that efficiency requirements for advanced concepts (i.e., process intensification) will require “warm gas cleanup,” which will have higher levels of sulfur than conventional cleaning. In addition, these advanced concepts may require that the effluent from the gasifier be processed without major cleaning. Therefore, the advanced concepts may require WGS and membrane separation with sulfur, ammonia, and chloride tolerances that are found in the raw gasifier effluent. This suggests that the WGS and membrane tolerances to contaminants in the synthesis gas require a better quantitative definition and may be different depending on the specific research approach being pursued.

#### 4.1.4.1. WGS Reaction Technical Targets

The basis for the 2015 technical targets assumes a single, compact WGS reactor operable over a wide range of temperatures and pressures with minimal undesirable side reactions and tolerance of common impurities found in coal-derived syngas. A catalyst lifetime of greater than 10 years is desirable, and depending on the form of the catalyst within the reactor, it may need to equal the expected operational life of the reactor. The cost goal is a 30 percent reduction over today's fixed-bed systems and a wider range of operating temperatures.

**Table 8. WGS Reaction Technical Targets**

Performance Criteria	Units	Current Status	2010	2015
Reactor type	-	Multiple fixed beds	Advanced configurations - tbd	
Catalyst form	-	Pellets	Advanced configurations - tbd	
Active metal	-	Cu/Zn or Fe/Cr or Co/Mo	Advanced configurations – tbd	
Feed temperature	°C	200–300	>250	>400
Feed pressure	psia	450–1150	>450	>750
Approach to equilibrium	°C	8–10	<6	<4
Min. steam/CO ratio	Molar	2.6	<2.6	<2
Sulfur tolerance, ppmv	-	Varies	>20	>100
COS conversion	-	Varies	Partial	Total
Chloride tolerance, ppmv	-	Varies	> 3	>100
Stability/durability	Years	3–7	>7	>10
Catalyst cost	\$/lb	~5	<5	<5

#### 4.1.4.2. Hydrogen Separation Technical Targets

The key performance criteria for successful incorporation of membrane separation reactors into hydrogen from coal configurations are shown in Table 9. Although high flux rates and low cost are the key parameters, there also are other critical criteria that must be satisfied. Ideally, the temperature of operation should be in a range compatible with warm synthesis gas cleaning technologies.

Experimental results from several projects in the Program have met the 2007 targets and have shown progress towards the 2010 targets.

Table 9. Hydrogen Separation Technical Targets\*

Performance Criteria	Units	Current Status <sup>a</sup> (H <sub>2</sub> -permeable cermet)	2010 Target	2015 Target
Flux <sup>b</sup>	ft <sup>3</sup> /hour/ft <sup>2</sup>	~220	200	300
Temperature	°C	300–400	300–600	250–500
S tolerance	ppmv	Yes (~20 ppmv)	20	>100
Cost	\$/ft <sup>2</sup>	<200	100	<100
WGS activity	-	N/A	Yes	Yes
ΔP Operating capability <sup>c</sup>	psi	1,000 (tested)	Up to 400	Up to 800 to 1,000
Carbon monoxide tolerance	-	Yes	Yes	Yes
Hydrogen purity <sup>d</sup>	%	>99.999%	99.5%	99.99%
Stability/durability	Years	0.9 (tested)	3	5

<sup>a</sup> Current status is shown for only one separation membrane — hydrogen-permeable cermet. Additional current status information is provided on microporous membranes in Table 4 of this report.

<sup>b</sup> For 100 psi ΔP (hydrogen partial pressure basis).

<sup>c</sup> ΔP = total pressure differential across the membrane reactor.

<sup>d</sup> Polishing filters may be needed downstream of the separation system in order to remove final traces of CO, sulfur, and other impurities to meet PEM fuel cell requirements. These targets exclude the effect of polishing filters.

\* *Technical targets are for membrane types described previously — research that is currently supported by FE and NETL. Research on other membranes is not precluded if the potential flux, cost, and tolerance to impurities are promising. Research is also encouraged on advanced solvent and adsorption technologies to separate hydrogen. Reverse selective hydrogen separation systems that separate CO<sub>2</sub> also are promising. The technical targets for hydrogen membranes relate to hydrogen from coal technology in which delta P will be around 100 psi and the membrane will require resistance to contaminants (CO and H<sub>2</sub>S). Technical targets for hydrogen membranes that are included in the EERE Hydrogen, Fuel Cells & Infrastructure Technologies RD&D Plan are for systems that operate at lower delta P and have less contaminants.*

Because the WGS reaction is exothermic and a large amount of shift is expected to occur within the membrane reactor, the membrane reactor also should operate in a temperature range compatible for the WGS to occur. An acceptable range would be 400–500 °C. It has been demonstrated that WGS activity is an essential function of the membrane reactor for coal-to-hydrogen applications. In addition, for metallic membranes where catalytic activity for hydrogen dissociation is important, tolerance to sulfur compounds such as H<sub>2</sub>S and COS is desirable. Failure to achieve sulfur tolerance would require an additional sulfur polishing step in the coal-to-hydrogen plant configuration.

The membrane also must be structurally capable of withstanding the expected pressure drop across the system. Current coal gasification systems operate around 40 atmospheres of pressure; therefore if the hydrogen product from the membrane is at 5–10 atmospheres, the differential pressure across the membrane would be about 450–525 psi. Future coal gasification systems for hydrogen may operate at 80 atmospheres, so that the system pressure differential across the membrane could be as high as 800–1,000 psi. The membrane must also resist or be tolerant to atomic rearrangements, surface roughening, and formation of impurity over-layers that could adversely affect structural integrity in a WGS environment. In addition, it is critical that any membrane system be completely tolerant to carbon monoxide. It is also important to achieve higher hydrogen flux while simultaneously minimizing the pressure drop across the membrane in order to reduce the hydrogen product compression requirement. These target criteria are independent of membrane type.

#### 4.1.4.3. Advanced Polishing Filter Technical Targets

The targets for advanced polishing filters are shown in Table 10. Because end-use applications for hydrogen have different tolerance levels for various contaminants, separate targets are shown for SOFCs, PEM fuel cells, and hydrogen gas turbines.

**Table 10. Advanced Polishing Filter Technical Targets**

Contaminant	SOFC	PEM Fuel Cells <sup>a</sup>	Gas Turbine
Total non-particulates	Not available	100 ppm	Not available
Total sulfur (H <sub>2</sub> S, COS, etc.)	60 ppbv	4 ppbv S <sup>b</sup>	750 ppmv fuel gas 20 ppmv for Selective Catalytic Reduction (SCR).
Total halides (Cl, F, Br)	100 ppbv	50 ppb <sup>c</sup>	5 ppmv fuel gas
Total fuel-nitrogen (NH <sub>3</sub> , HCN)	Not available	0.1 ppmv NH <sub>3</sub>	Fuel-bound nitrogen 200-400 ppmv
Total alkali metals (Na, K, Li vapor and solid phases)	Not available	Not available	100 ppbv fuel gas
Volatile Metals (V, Ni, Fe, Pb, Ca, Ba, Mn, P)	5 ppbv As 0.2 ppmv Se 30 ppbv Cd	Not available	20 ppbw Pb <sup>d</sup> 10 ppbw V <sup>d</sup> 40 ppbw Ca <sup>d</sup> 40 ppbw Mg <sup>d</sup>
Water	Not available	5 ppm <sup>e</sup>	Not available
Total hydrocarbons (C <sub>1</sub> basis)	Not available	2 ppm <sup>f</sup>	Not available
Oxygen	Not available	5 ppm	Not available
Carbon dioxide	Not available	1 ppm <sup>g</sup>	Not available
Carbon monoxide	Not available	0.2 ppm	Not available
Formaldehyde	Not available	0.01 ppm	Not available
Formic acid	Not available	0.2 ppm	Not available
Particulates	Not available	1 µg/L H <sub>2</sub> < 10 µm diameter	0.1-0.5 ppmw fuel gas

<sup>a</sup> EERE *Hydrogen, Fuel Cells, and Infrastructure Technologies Multi-year RD&D Plan*, Appendix C: Hydrogen Quality, April 2007. Based on Society of Automotive Engineers specification in *SAE-2719 – Information report on the Development of a Hydrogen Quality Guideline for Fuel Cell Vehicles*.

<sup>b</sup> Includes, for example, hydrogen sulfide (H<sub>2</sub>S), carbonyl sulfide (COS), carbon disulfide (CS<sub>2</sub>) and mercaptans.

<sup>c</sup> Includes, for example, hydrogen bromide (HBr), hydrogen chloride (HCl), chlorine (Cl<sub>2</sub>) and organic halides (RX).

<sup>d</sup> Specification for Fuel Gases for Combustion in Heavy-Duty Gas Turbines, GEI 41040G, GE Power Systems, Gas Turbines, January 2002. <http://www.netl.doe.gov/technologies/coalpower/turbines/refshelf/GE%20Turbine%20Fuel%20Specs.pdf>

<sup>c</sup> As a result of water threshold level, the following constituents should not be found; however, should be tested if there is a question on water content:

Sodium ( $\text{Na}^+$ ) @ < 0.05  $\mu\text{mole/mole H}_2$  or < 0.05  $\mu\text{g/liter}$

Potassium ( $\text{K}^+$ ) @ < 0.05  $\mu\text{mole/mole H}_2$  or < 0.08  $\mu\text{g/liter}$

Potassium hydroxide (KOH) @ < 0.05  $\mu\text{ mole/mole H}_2$  or < 0.12  $\mu\text{g/liter}$

<sup>f</sup> Includes, for example, ethylene, propylene, acetylene, benzene, phenol (paraffins, olefins, aromatic compounds, alcohols, aldehydes). Total hydrocarbons may exceed 2  $\mu\text{mole/mole}$  due only to  $\text{CH}_4$  if the total does not exceed 100  $\mu\text{mole/mole}$ .

<sup>g</sup> The SAE document does not conform with ISO on  $\text{CO}_2$ . SAE has agreed to harmonize that with ISO in the first revision cycle.

#### 4.1.5. Technical Barriers – Central Production Pathway

The following technical and economic barriers must be overcome to meet the goals and objectives of the Hydrogen from Coal Central Production Pathway.

##### 4.1.5.1. Barriers

**A. High Cost.** The cost of current technologies to produce hydrogen from coal must be reduced. This includes improved efficiency of the process, and reduced capital and operating costs.

**B. Lack of Demonstration of Novel Technologies.** Many novel separation processes (e.g., advanced membranes) have not been demonstrated at a scale sufficient to determine their potential for lower cost and efficient integration into advanced hydrogen from coal production systems.

**C. Complex Process Designs.** Complex process systems that have a greater number of process units require a larger plant footprint and are nearly always more difficult to improve in terms of efficiency. “Process intensification,” in which multiple process function technologies are integrated into one process step — such as combined gas cleanup, WGS reaction, and hydrogen separation — offer potential advantages in scalability of the design, as well as better efficiency and lower costs. Various candidate process intensification processes and/or units require significant RD&D to establish their techno-economic viability.

##### 4.1.5.2. WGS Reaction Barriers

**D. Impurity Intolerance/Catalyst Durability.** The WGS reaction occurs after coal has been gasified to produce synthesis gas. Impurities in the synthesis gas may act as poisons, deactivating the catalyst and damaging the structural integrity of the catalyst bed. Improved catalysts and reactor systems are needed to maintain catalyst activity throughout the reactor, and in some cases, eliminate the post-gasification synthesis gas cleanup step upstream of the WGS reactor.

**E. Operating Limits.** The synthesis gas produced from gasification exits the gasifier at a high temperature. The WGS reaction then is carried out in two separate stages: a high-temperature shift and a low-temperature shift. The development of advanced WGS catalysts and reactor systems that are more robust and can operate over a wide range of temperatures can eliminate the need for two separate stages, potentially reducing capital costs.

**F. Undesired Side Reactions.** Reactions that produce species other than hydrogen and  $\text{CO}_2$  must be minimized in the WGS reactor.

#### 4.1.5.3. Hydrogen Separation Barriers

There are several technology options available that can be used to separate hydrogen from synthesis gas. The following broad set of barriers must be overcome to reduce the cost and increase the efficiency of these separation technologies.

**G. Hydrogen Embrittlement of Metals.** Below 300 °C, hydrogen can embrittle and induce a phase change in certain types of separation membranes. Embrittlement reduces the durability and effectiveness of the membrane for selectively separating hydrogen. Hydrogen also embrittles the structural steels of the membrane housing and gas handling systems.

**H. Thermal Cycling.** Thermal cycling can cause failure in some membranes, reducing its durability and operating life.

**I. Poisoning of Catalytic Surfaces.** Metallic membranes must dissociate molecular hydrogen into hydrogen atoms before it can diffuse through the separation layer. The presence of trace contaminants, particularly sulfur, can poison the surface sites that are catalytically active for this purpose, diminishing the effectiveness of the membrane.

**J. Loss of Membrane Structural Integrity and Performance.** Depending on conditions, membranes may be subject to atomic rearrangements, surface roughening, pitting, and formation of impurity over-layers that may adversely affect structural integrity and performance. This becomes more important for the supported thin film membranes envisioned to enhance flux and minimize cost. For example, oxidizing gas mixtures (oxygen, steam, and carbon oxides) have been observed to cause metallic membranes to rearrange their atomic structure at temperatures greater than 450 °C. This results in the formation of defects that reduce membrane selectivity for hydrogen. Some ceramic membranes exhibit poor thermo-chemical stability in CO<sub>2</sub> environments, resulting in the conversion of membrane materials into carbonates. In solvent systems, impurities can cause less effective absorption and may lead to excessive loss of solvent, which will increase cost and decrease separation efficiency.

**K. Lack of Seal Technology and Materials.** High-temperature, high-pressure seals are difficult to make using ceramic substrates.

**L. Defects During Fabrication.** Fabrication of microporous membranes requires a reduction in membrane pore size, which is accomplished by deposition techniques. It is ideal to prepare a high-flux, continuous zeolite membrane with one synthesis layer that is free of defects. No synthesis and evaluation methods exist for tunable pore-size membranes used in separating H<sub>2</sub> from light gases at high temperature and in chemically challenging environments. The chemical deposition of thin palladium or palladium-alloy membranes onto support structures is an important technical challenge in the fabrication of defect-free membranes. Large-scale, rapid manufacturing methods for defect-free thin films and membranes and modules in mass production must be developed and demonstrated.

**M. Low Selectivity.** Hydrogen selectivity of some zeolite-supported membranes decreases with increasing temperature, particularly above 150°C. However, temperatures typically need to be greater than 300°C to produce the hydrogen flux rates needed for commercial applications.

**N. Technologies Do Not Operate at Optimal Process Temperatures.** Processes that can be designed to operate at or near system conditions, without the need for cooling and/or re-heating, will be more efficient. Ideally, the temperature of operation should be in a range similar to outlet conditions from the second WGS reactor at 300–500 °C to eliminate the need for this re-heating. However, the lower operating temperature potentially will lower the flux rate to unacceptable rates, which poses a technical challenge.

**O. Conductivity Rates.** Proton and electron conductivities across ITM membranes have to be improved, as does mixed conductivity.

**P. Excessive Heat.** Some novel separation processes, such as CO<sub>2</sub> removal through the formation of hydrates, are highly exothermic, requiring the integration of heat transfer systems in these processes.

**Q. Impurities in Hydrogen from Coal.** PEM fuel cells require a highly pure hydrogen product. Technologies are needed that can reduce the CO in hydrogen product streams to less than 10 ppm, and sulfur-containing compounds to less than 10 ppb.

#### 4.1.6. Technical Task Descriptions – Central Production Pathway

Table 11 summarizes the tasks for the central production pathway technologies.

**Table 11. Task Descriptions for Central Production Pathway Technologies**

<b>Task Number</b>	<b>Task Description</b>	<b>Barriers Addressed by Task</b>
1	<p><i>Advanced Shift Technologies</i></p> <ul style="list-style-type: none"> <li>• Develop advanced shift catalysts that are more active and are impurity-tolerant.</li> <li>• Conduct the WGS reaction using a high-temperature membrane without added catalyst.</li> <li>• Develop integrated single-step shift-membrane separation technology.</li> </ul>	A, C, D, E, F
2	<p><i>Advanced Hydrogen Separation</i></p> <ul style="list-style-type: none"> <li>• Review and analyze separation technology to determine the current status, needs for advanced technology, preferred separation options, and scale-up to prepare modules.</li> <li>• Link membrane development work to material surface characterization studies in order to understand effects of impurities and operating conditions on short- and long-term membrane performance.</li> <li>• Conduct RD&amp;D to explore technology for preferred advanced separation systems such as PSA, membranes, solvents, reverse selective systems, and other technology alternatives.</li> <li>• Identify low-cost materials, such as non-precious metals, for hydrogen separation.</li> <li>• Use molecular sieves to stabilize membranes.</li> <li>• Develop appropriate membrane seal and fabrication technologies and methods for module preparation and scale-up.</li> </ul>	A, C, and Barriers G through Q
3	<p><i>Polishing Filters Development</i></p> <ul style="list-style-type: none"> <li>• Develop polishing filter technologies that enable hydrogen product streams to meet fuel quality requirements for PEM fuel cells efficiently and at low cost.</li> </ul>	A, Q
4	<p><i>Reverse Selective Hydrogen Separations</i></p> <ul style="list-style-type: none"> <li>• Identify low-cost materials for CO<sub>2</sub> separations.</li> <li>• Develop reverse selective hydrogen membranes for cost-effective separation of CO<sub>2</sub> and other gases from mixed gas streams.</li> <li>• Develop advanced adsorption, hydrates, or other novel technologies for the cost-effective capture of CO<sub>2</sub> from mixed gas streams.</li> </ul>	M through Q
5	<p><i>Advanced Concepts</i></p> <ul style="list-style-type: none"> <li>• Investigate advanced and novel process concepts that integrate several processes — gas cleanup, WGS reaction, and hydrogen separation — into one step.</li> <li>• Investigate novel, “out-of-the-box” technologies that can produce hydrogen from coal directly or indirectly.</li> </ul>	A, C
6	<p><i>Demonstrations</i></p> <ul style="list-style-type: none"> <li>• Demonstrate and test advanced technologies to confirm laboratory, bench-scale, and pre-engineering module results.</li> </ul>	A, B

## 4.2. Alternate Hydrogen Production Pathway

In addition to central station hydrogen production, coal can be converted to high hydrogen-content, liquid hydrocarbon carriers, and SNG through alternate production technology pathways. These products have the benefit of being delivered through the nation's existing fuel distribution infrastructure and reformed to provide the hydrogen near the point of use, thus providing a potential acceleration of hydrogen market penetration until hydrogen pipeline systems are installed. With 90 percent carbon sequestration, the life cycle CO<sub>2</sub> emissions would be equivalent to their counterpart fuels produced from petroleum. By combining carbon sequestration with co-feeding biomass with the coal, the CO<sub>2</sub> emissions can be reduced significantly in the future, potentially to near-zero, depending on the percent of biomass in the mixture.

These alternate pathways have attributes that can help facilitate the early commercial deployment of hydrogen-fueled vehicles and clean use of domestic coal in the transportation sector. Defining the RD&D and analyses requirements will be an important part of this RD&D Plan. Computational studies and analyses are expected to play a key role in identifying promising reaction chemistries and chemical processing routes. The cost, efficiency, and benefits associated with these alternate hydrogen production pathways has to be evaluated on a system basis, including the use of current data from the RD&D efforts, for comparison to other possible hydrogen system pathways. These activities will be coordinated with the appropriate EERE Hydrogen Program activities.

### 4.2.1. Goal and Milestones – Alternate Hydrogen Production Pathway

**Goal:** By 2014, make available an alternative hydrogen production pathway, including a product reforming system, for decentralized production of hydrogen from high hydrogen content hydrocarbon liquids and/or SNG that can be delivered through the existing fuel distribution infrastructure.

**Milestones:**

- By the end of 2011, determine the most feasible alternate hydrogen from coal pathway(s) and reforming system(s) for producing hydrogen-rich liquid fuels and SNG that are able to meet the hydrogen cost target.
- By the end of 2014, provide the technical data base needed to facilitate commercial deployment of the most feasible alternate hydrogen production pathway(s) and reforming system(s) to produce decentralized hydrogen.

#### 4.2.2. Activities – Alternate Hydrogen Production Pathway

Table 12 lists the alternate hydrogen production pathway technologies that are currently funded by the Hydrogen from Coal Program.

**Table 12. Relevant R&D Program Activities**

Category	Technology
<i>Liquid fuels production</i>	<ul style="list-style-type: none"> <li>• Develop and test advanced catalyst formulations and reactor configurations that offer improved conversion of synthesis gas to high hydrogen content, coal-derived liquid fuels.</li> <li>• Evaluate the potential of coal-derived ethanol as a carrier for producing decentralized hydrogen.</li> <li>• Analyze thermal stability, chemical make-up, low-temperature properties, combustion and emissions, elastomer swell behavior, and storage stability.</li> <li>• Characterize and evaluate coal-derived liquid fuels for their capability to meet the specifications required for specific end-use applications.</li> <li>• Characterize synthesis gas produced from coal and biomass mixtures and assess contaminant impacts on downstream processes and equipment.</li> <li>• Validate material handling, preparation, and delivery systems of coal and biomass mixtures for high-pressure gasifiers.</li> </ul>
<i>SNG production</i>	<ul style="list-style-type: none"> <li>• Develop advanced SNG production technologies.</li> </ul>
<i>Fuels reforming</i>	<ul style="list-style-type: none"> <li>• Conduct reforming studies of coal-derived liquids to hydrogen.</li> <li>• Evaluate performance of reformer on high hydrogen content, coal-derived liquid fuels.</li> </ul>
<i>Crosscutting</i>	<ul style="list-style-type: none"> <li>• Develop and apply computation tools to facilitate RD&amp;D focused on converting coal-derived synthesis gas to liquids and substitute natural gas.</li> <li>• Perform systems analyses to identify the most promising system configurations for producing coal-derived liquids and gases.</li> </ul>

FE has a long history as a leader in RD&D activities associated with producing liquid fuels from coal-derived synthesis gas (F-T products, methanol, and methanol to gasoline [MTG]). FE's RD&D program has included successful development of Liquid Phase Methanol (LPMEOH) technology in the DOE Clean Coal Technology Demonstration Program. Air Products and Chemicals, Inc. (APCI) was the lead on the \$213-million project, which demonstrated commercial-scale production of methanol and dimethyl ether (DME) from coal-derived synthesis gas. The project produced nearly 104 million gallons of methanol, and led to the Eastman Chemical ongoing commercial effort at their Kingsport, TN facility where methanol is used as the basis for producing a variety of chemical products.

Over a 20-year period from 1981 through 2001, DOE funded the Alternative Fuels Development unit (AFDU) located at LaPorte, Texas that was operated and maintained by APCI. The AFDU utilized simulated coal-derived synthesis gas to produce zero-sulfur F-T liquid fuels, DME, and alcohols and successfully demonstrated liquid phase WGS. DOE-sponsored systems engineering studies estimate that the cost (\$2008) to produce liquid fuels from coal would be about \$75 per barrel on a crude oil equivalent basis for a 50,000 bpd plant with carbon capture and storage technology.<sup>15</sup> As more plants are deployed, Rand projects that, through learning, the estimate cost of technology to produce liquid fuels from coal will drop about 30 percent<sup>16</sup>, which would equate to \$53 per barrel. Analysis in the

<sup>15</sup> Preliminary analysis from Noblis for CTL plant with carbon capture and storage.

<sup>16</sup> Merrow, E.W., *An Analysis of Cost Improvement in Chemical Process Technologies*, RAND, R-3357-DOE, May 1989.

Hydrogen from Coal Program assumes a more conservative cost reduction of 15 percent, equating to \$64 per barrel.

In the 1970s, concerns over a potential shortage of natural gas fostered considerable interest in the production of SNG from coal. A number of large-scale demonstration projects were planned and one was built in Beulah, North Dakota. The increased availability of North American natural gas in the 1980s and 1990s ended interest in large-scale production of SNG from coal. However, Dakota Gasification Company's Beulah plant still produces about 170 MMscfd of SNG from lignite. In addition, it has expanded operations to co-produce ammonia, ammonium sulfate, cresylic acid, nitrogen, phenol, and krypton and xenon gases. In 2000, the plant began exporting CO<sub>2</sub> to Canada for use in enhanced oil recovery (EOR). Currently, about 95 MMscfd of CO<sub>2</sub> produced at the plant are transported via a 205-mile long pipeline to EnCana Corporation's Weyburn oil field in southern Saskatchewan, Canada. The CO<sub>2</sub> is used for tertiary oil recovery, resulting in 5,000 barrels per day of incremental oil production or an additional 130–140 million barrels of oil over the life of the project. The initial investment for this project was \$1.3 billion (Canadian) by EnCana for field facilities, and \$100 million (U.S.) by Dakota Gasification for the pipeline and supporting facilities. Annual net revenue generated by the sale of the CO<sub>2</sub> from the plant is between \$15 million and \$18 million. The Weyburn field is also the subject of a long-term monitoring program to assess the final deposition of the CO<sub>2</sub> being injected in this project.

Increased demand for natural gas since the 1990s has resulted both in higher prices and more imports of natural gas, a trend that is anticipated to continue. The Energy Information Administration (EIA) *Annual Energy Outlook 2009* (AEO2009) reference case projects the Henry Hub natural gas price (\$2007) to gradually increase to \$6.16/MMBtu in 2015 and \$8.83/MMBtu by 2030. This represents approximately a four-fold increase over historical wellhead prices for natural gas, which have averaged around \$2/MMBtu. Over the short-term there has been much price volatility: Spot prices for natural gas have recently been as high as around \$13/MMBtu (early July 2008) and as of August 2009 are between \$3-4/MMBtu. The EIA's Short-term Energy Outlook projects Henry Hub prices to average \$3.65/MMBtu for 2009 and \$4.78/MMBtu in 2010. Although natural gas prices may continue to show volatility, if the future average price falls within the EIA AEO2009 projection, the economics of coal-derived SNG production may be attractive.

A 2004 DOE/NETL study<sup>17</sup> examined a conceptual, site-specific location in Texas that co-produces at least three products: electric power, hydrogen or SNG, and CO<sub>2</sub>. The electric power would be sold to the grid, the hydrogen would be sent by pipeline to the Gulf Coast petroleum refineries, the SNG would be sold as a natural gas supplement, and the CO<sub>2</sub> would be pipelined to the West Texas oil fields for EOR. The use of EOR provides an economically attractive option for sequestering CO<sub>2</sub>, and thus reduces GHG emissions from the lignite conversion. There may be an opportunity for petroleum refiners to use low-cost Texas lignite in place of natural gas to provide the hydrogen necessary for their refining operations. Also, lignite could be used to produce SNG as a natural gas supplement, and electric power could also be generated from the lignite and dispatched to the Texas grid.

This study showed that siting a mine-mouth, lignite-fed gasification plant in Texas, to produce hydrogen, SNG, electric power, and CO<sub>2</sub>, could be economically feasible in an era of high natural gas prices. For the case where the three products are electricity, SNG, and CO<sub>2</sub>, the costs (\$2004) for SNG range from \$5.00/MMBtu to \$6.90/MMBtu (higher heating value [HHV] basis). This cost depends on the gasification system, the value of co-produced power, and the value of the CO<sub>2</sub>. For this study, it was assumed that these plants would be baseload and that the value of the electricity is \$35.6/MWh and \$12/ton for the CO<sub>2</sub>.

<sup>17</sup> *Polygeneration of SNG, Hydrogen, Power, and Carbon Dioxide from Texas Lignite*, Mitretek Systems and Marano, J., December 2004.

### 4.2.3. Technologies – Alternate Hydrogen Production Pathway

The following R&D elements are contained in the Alternate Hydrogen Production Pathway and are listed by the section in which they are discussed:

- 4.2.3.1 Liquid fuels production/delivery/conversion
- 4.2.3.2 SNG production
- 4.2.3.3 Fuels reforming in distributed production facilities

#### 4.2.3.1. Liquid Fuels Production

Hydrogen-rich liquid fuels that are produced coal-derived synthesis gas have the potential to use the existing petroleum product delivery and storage infrastructure with little to no modification. These liquid fuels can be delivered to retail fueling stations where the liquids can be reformed on-site, or to sub-central hydrogen production locations to produce pure hydrogen. In the latter case, final delivery of the hydrogen to the retail outlets can be made using hydrogen tube trailers. In the longer term, with advancements in carbon sequestration technologies, there is the possibility of capturing and storing carbon from the much larger sub-central liquid fuels reforming facilities so that environmental concerns are alleviated.

#### 4.2.3.2. SNG Production

Conversion of coal to SNG could supplement existing natural gas supplies that have experienced price volatility in the last several years. SNG uses the same infrastructure as natural gas and could be an attractive alternative as a hydrogen carrier for fuel cell-based transportation systems. In a future hydrogen energy system, SNG could be delivered using the existing natural gas infrastructure to distributed or sub-central reforming stations to produce hydrogen.

#### 4.2.3.3. Fuels Reforming at Distributed Production Facilities

Separation of hydrogen from synthesis gas-derived liquid fuels and SNG through reforming at distributed hydrogen production sites (re-fueling stations) offers the benefit of using the existing liquid fuels and natural gas infrastructure. SNG would likely employ steam methane reforming technology to produce hydrogen, whereas advanced technologies under development would be applied to reform hydrocarbon liquids. The production of hydrogen from liquids and SNG could provide a near-term transition to a hydrogen economy — an option that does not require significant modification or investment in capital-intensive infrastructure associated with centralized facilities.

### 4.2.4. Technical Targets – Alternate Hydrogen Production Pathway

The technical targets in this RD&D Plan, unless otherwise indicated, represent the status of the technology after completion of R&D, but prior to demonstration of the technology in modules at engineering scale.

#### 4.2.4.1. Hydrogen-Rich Liquids Production and Conversion via Reforming

The overall DOE hydrogen cost goal of \$2-3/gge (delivered, untaxed) is independent of the pathway used to produce and delivery hydrogen. In addition, the methodology accounts for the energy efficiency of the gasoline hybrid vehicle and the fuel cell vehicle on a cost-per-mile basis. The cost goal was derived using the National Academy of Sciences (NAS) fuel-efficiency improvement factors and the EIA

AEO 2005 “High A” gasoline price projection for 2015.<sup>18</sup> In Table 13, it is assumed that the zero-sulfur hydrogen-rich liquid fuels produced from coal-derived synthesis gas at a central plant are transported via the existing petroleum pipeline system to a decentralized refueling station where the liquids are reformed into hydrogen. The size of the liquid fuels plant is 50,000 barrels per day of coal-derived, hydrogen-rich liquid fuels; the capacity of each re-fueling station would be 1,500 kg of hydrogen per day (1,500 gallons of gasoline equivalent [gge]). Because of the accuracy of the analysis, the costs associated with transport of the liquid product and the CO<sub>2</sub> to storage were not included but are expected to have a small impact on the overall cost of the product hydrogen.

To establish the potential cost of the pathway for producing hydrogen from substitute natural gas and coal-derived liquids reformed at a refueling station, the reforming costs for distributed production of hydrogen from natural gas and hydrogen-rich liquids were derived from the NAS comprehensive review of the hydrogen economy<sup>19</sup> for consistency. The cost of current technology to produce hydrogen-rich liquid fuel feedstock from coal is also updated using NETL analyses (to be published). The projected cost of future technology for coal-derived liquids is based on “learning” as identified by Rand.<sup>20</sup> Using current technology to produce liquid fuels from coal, it is estimated that the liquid fuel feedstock cost contribution of producing hydrogen would be \$2.2/gge (\$2004). This assumes coal-derived liquid product is produced by the F-T process and the reforming efficiency is 60 percent. Cost of delivery of the liquid fuel is insignificant. The estimated cost of reforming at the fueling site is \$2.4/gge of hydrogen<sup>21</sup>, for a total distributed hydrogen production cost of \$4.6/gge of hydrogen. Deployment of advanced technology for the production of coal-derived F-T fuels feedstock is expected to lower the cost contribution of the feedstock to \$1.6/gge (\$2004), assuming a future reforming efficiency of 70 percent. If advanced technology is utilized for liquid feedstock production and reforming, the total cost of hydrogen would be \$2.8/gge, which is an approximately 40 percent reduction from the estimated current cost. This estimated cost for advanced technology is within the DOE cost target of \$2/gge to \$3/gge of hydrogen.

---

<sup>18</sup> Press Release. DOE Announces New Hydrogen Cost Goal, July 14, 2005.

<sup>19</sup> National Research Council and the National Academy of Engineering, “The Hydrogen Economy – Opportunities, Costs, Benefits and R&D Needs,” 2004.

<sup>20</sup> Merrow, E.W., *An Analysis of Cost Improvement in Chemical Process Technologies*, RAND, R-3357-DOE, May 1989. To be conservative only half (15%) reduction in cost was used in the analyses.

<sup>21</sup> National Research Council and National Academy of Engineering, “The Hydrogen Economy – Opportunities, Costs, Benefits and R&D Needs,” 2004. The estimate is based on Table E-35, page 179 for an existing reforming technology and Table E-36, page 180 for an advanced reforming system based on reforming natural gas.

**Table 13: Benchmarks for Production of Coal-derived High Hydrogen-Content Liquids, Transported and Reformed at the Refueling Station for Current and Advanced Technology**

Characteristics	Units	2004 Status	2015
High hydrogen-content liquids cost	\$/gge	2.2 <sup>1</sup>	1.6 <sup>2</sup>
Reforming costs			
Electricity cost	\$/gge	0.2	0.1
Variable non-fuel O&M	\$/gge	0.1	0.1
Fixed operating cost	\$/gge	0.3	0.1
Capital charges	\$/gge	1.8	0.9
Total cost	\$/gge	4.6	2.8

Note: National Academy of Sciences, “The Hydrogen Economy – Opportunities, Costs, Benefits and R&D Needs”, 2004. The estimate is based on Table E-35, page 179 for an existing reforming technology and Table E-36, page 180 for an advanced reforming system based on reforming natural gas with the assumption that reforming of F-T liquids would cost 10 percent more for all categories except for the cost of the F-T liquids which was determined as identified in footnotes 1 and 2.

1. Current F-T Liquids cost from Draft NETL Coal and Biomass case studies for draft NETL CBTL report (F-T \$75 per barrel (COE) + \$23 = \$98 per barrel X 0.7 reduction for naphtha value in comparison to diesel X correction for difference in btus [(1/0.94) /0.60 X 1/ 42 gal per barrel = \$2.9/gge]). Cost normalized for 2004. CERA down stream index 2009 vs. 2004 (115/175 = 0.66). General price inflation deflator for 2004 – 2008 (100/115 = 0.87). Assume capital 50% of total cost (0.66 + 0.87 = 1.53/2=0.77) Using the same deflator for item 1 the 2004 cost of liquid feedstock for reforming would be \$2.9/gge X 0.77) = \$2.2/gge.
2. DOE future cost for F-T liquids, Rand estimated that through “learning” the cost estimate for CTL will drop about 30%. To be conservative, a 15% learning reduction was assumed in the analysis. Therefore, it is estimated that F-T liquids estimate at \$75 per barrel (COE-\$2008) will drop to \$64 per barrel and the feedstock cost for reforming in 2004 will be (F-T \$64 per barrel (COE) X 1.3 = \$83 per barrel X 0.7 reduction for naphtha X (1/0.94) X 1/0.70 X 1/42 gal per barrel = \$1.98). Using this deflator the 2004 cost of liquid feedstock for reforming would be \$2.1/gge X 0.77) = \$1.6/gge. The reforming costs are for an advanced reforming system as defined in Note 1 and also in \$2004.

#### 4.2.4.2. SNG Production and Conversion via Reforming

Table 14 provides the benchmarks for SNG production from coal, which are based on conversion of Texas lignite and are from the Mitretek (now Noblis) report, *Polygeneration of SNG, Hydrogen, Power, and Carbon Dioxide from Texas Lignite*, December 2004. Production costs may vary if other coal feedstocks are used or if SNG production occurs at other locations. The 2004 highest estimated production cost for SNG from Texas lignite is \$6.90/MMBtu (HHV). SNG will utilize the existing natural gas pipeline infrastructure and can subsequently be reformed into hydrogen at distributed refueling station locations. SNG will therefore be subject to distribution charges similar to natural gas. The current and future SNG production costs were used to establish the feedstock costs for the distributed reforming station. The feedstock requirement was established by using reforming efficiencies defined in the NAS study. The technical targets for distributed natural gas reforming for current and future technologies are also taken from the NAS study.<sup>22</sup>

<sup>22</sup> National Research Council and the National Academy of Engineering, “The Hydrogen Economy – Opportunities, Costs, Benefits and R&D Needs,” 2004.


**Table 14: Benchmarks for Production of Coal-derived SNG, Transported and Reformed at the Refueling Station**

Characteristics	Units	Current Technology	Future Technology
Natural gas cost	\$/gge	1.7 <sup>1</sup>	1.5
Electricity cost	\$/gge	0.2	0.1
Variable non-fuel O&M	\$/gge	0.1	0.1
Fixed operating cost	\$/gge	0.2	0.1
Capital charges	\$/gge	1.6	0.9
Total	\$/gge	3.8	2.7

Note: National Academy of Sciences, “The Hydrogen Economy – Opportunities, Costs, Benefits and R&D Needs,” 2004, Table E-35, page 179 and Table E-36, page 180.

1. SNG production cost is based on the Mitretek Technical Report, *Polygeneration of SNG, Hydrogen, Power, and Carbon Dioxide from Texas Lignite*, December 2004. 2004 high estimated cost of SNG - \$6.90 per million btu's x (1089/963) / 7.45 gge of hydrogen = \$1.05/gge on a LHV basis. The current technology reforming efficiency is projected by NAE to be 60%, therefore feedstock cost would be  $\$1.05 \times 1/0.60 = \$1.70/\text{gge}$ . Future technology reforming efficiency is projected by NAE to be 70%, therefore feedstock cost would be  $\$1.05 \times 1/0.70 = \$1.50/\text{gge}$

Figure 13 provides potential cost estimates for current and advanced reforming technology for different costs of SNG.

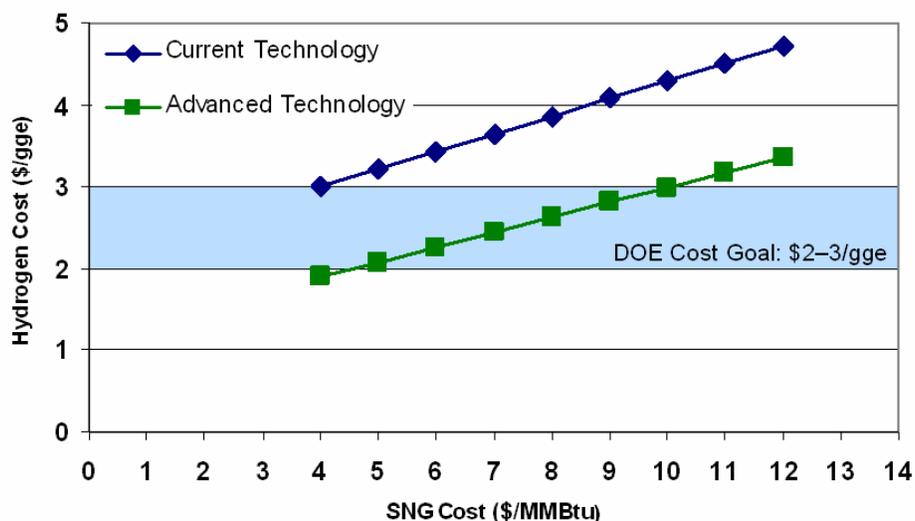**Figure 13. Cost of Hydrogen based on SNG Production and Reforming**

#### 4.2.5. Technical Barriers – Alternate Hydrogen Production Pathway

##### 4.2.5.1. General Barriers

**A. Lack of Demonstration of Novel Technologies.** Integrated operation of the coal-to-syngas into the hydrogen-rich liquids process has to be demonstrated at a commercial-scale unit in the United States. Computational chemical/process analyses in conjunction with laboratory experimentation will assist in determining the optimal hydrogen-carrier liquid(s) for reforming. This would be followed by

demonstrating the viability of the selected process at an appropriate scale to confirm their hydrogen production suitability for fuel cell applications.

#### ***4.2.5.2. Liquid Fuels and SNG Production, Delivery, and Conversion via Reforming Barriers***

**B. Low Efficiency.** To be an effective hydrogen carrier, synthesis gas-derived liquids and SNG must be produced, delivered, and converted into hydrogen in an efficient manner that overrides the number of energy-using steps required to provide the hydrogen. The current system is inefficient, and improvements must be made through improved catalysts, reactors, and production of optimal liquids.

**C. Catalyst and Reactor Systems Not Optimized.** These systems require improvements in reactor design and advanced catalysts to improve the liquid fuel production process, including the use of coal-derived, CO-rich synthesis gas.

**D. Processes for SNG Production Not Optimized.** SNG production processes need to be optimized to improve process efficiency and operations.

**E. The Optimal Hydrogen-Rich, Synthesis Gas-derived Liquid Fuel for Reforming Has Not Been Identified.** Work must be done to identify the most optimal hydrogen-rich, synthesis gas-derived liquid fuel that can be used for hydrogen generation at distributed hydrogen production sites.

**F. High Capital Costs.** Current, small-scale, distributed reformer technologies are too expensive to supply hydrogen at a cost comparable to that of gasoline. Multiple-unit operations and insufficient heat integration contribute to large, costly production and purification subsystems. Improved reforming and shift catalysts are needed to reduce side reactions and improve performance, bearing in mind the availability of the catalyst materials. Shift, separation, and purification costs need to be reduced by developing new technology such as single-step shift with integrated membrane technology.

**G. High Operating Costs.** Operating and maintenance costs are too high for distributed hydrogen generation plants that use hydrogen-rich, synthesis gas-derived liquids as feedstocks. Improved processes that require less operator control and maintenance are needed.

**H. Lack of CO<sub>2</sub> Capture.** Small-scale, distributed generation and sub-central reforming of fossil fuel-derived liquid fuels will emit GHGs. Cost-effective capture of CO<sub>2</sub> from distributed generation facilities is more difficult than at central locations. Research is needed to discover potential options to sequester CO<sub>2</sub> from distributed generation systems.

#### 4.2.6. Technical Task Descriptions – Alternate Hydrogen Production Pathway

Table 15 shows the technical tasks for the alternative hydrogen production pathway — hydrogen-rich, synthesis gas-derived fuel production, reforming technology, computational analysis, and demonstrations.

**Table 15. Tasks for Alternate Hydrogen Production Technologies**

<b>Task Number</b>	<b>Task Description</b>	<b>Barriers Addressed by Task</b>
1	<p><i>Computational Chemistry and Dynamic Analysis</i></p> <ul style="list-style-type: none"> <li>• Develop computational and analytical tools to simulate hydrogen-rich, synthesis gas-derived liquid fuels and SNG production to determine the optimum processes.</li> <li>• Develop the computational and analytical tools to simulate the separation of hydrogen from hydrogen-rich, synthesis gas-derived liquid fuels and SNG in sub-central or distributed production facilities.</li> </ul>	C, E
2	<p><i>Hydrogen-rich, Synthesis Gas-derived Liquid Fuels Production</i></p> <ul style="list-style-type: none"> <li>• Develop novel reactor and catalyst systems to produce the most optimal, hydrogen-rich, synthesis gas-derived liquid fuels for reforming applications.</li> <li>• Characterize synthesis gas produced from coal and biomass mixtures and assess contaminant impacts on downstream processes and equipment.</li> <li>• Validate material handling, preparation, and delivery systems of coal and biomass mixtures for high-pressure gasifiers.</li> </ul>	B, C, H
3	<p><i>SNG Production</i></p> <ul style="list-style-type: none"> <li>• Develop and optimize advanced SNG production technologies.</li> </ul>	D
4	<p><i>Reforming Technology</i></p> <ul style="list-style-type: none"> <li>• Optimize distributed reformers for hydrogen-rich, synthesis gas-derived liquid fuels and SNG.</li> </ul>	E, F, G, H
5	<p><i>Demonstrations</i></p> <ul style="list-style-type: none"> <li>• Demonstrate reforming of the most optimal, hydrogen-rich, synthesis gas-derived liquid fuels and SNG in distributed reforming applications.</li> </ul>	A

### 4.3. Polygeneration

To further improve the potential for economically competitive production of hydrogen from coal for the Central and Alternate Production Pathways, the Hydrogen from Coal Program implemented an overarching research activity on polygeneration. The concept of polygeneration involves the production of high-value coal-derived chemicals and/or carbon materials utilizing the facilities, products, or intermediate products from central and alternate production pathway facilities integrated with electricity production. The technologies to make these high-value products would share the utilities and other infrastructure with these major facilities and provide a synergistic cost benefit for producing both hydrogen and higher value materials. In addition to enhancing facility profitability and reducing our dependence on petroleum, this strategy also has the benefit of potentially limiting the movement of our domestic chemical and carbon products manufacturing facilities to offshore locations. From a broad research perspective, the DOE's goal is to further the development of chemical and carbon materials technologies beyond early laboratory scale efforts in order to better validate the technical and economic merits of the proposed processes.

#### 4.3.1. Goals and Milestones – Polygeneration

**Goal:** By 2015, make available processes to enhance coal facility profitability by producing a variety of high-value, coal-derived chemicals and/or carbon materials that can be incorporated into the central or alternate pathway hydrogen production systems.

#### 4.3.2. Activities – Polygeneration

Table 16 lists the polygeneration technologies currently under development by the Hydrogen from Coal Program.

**Table 16. Relevant Polygeneration R&D Program Activities**

Category	Technology
<i>High-value carbon products</i>	<ul style="list-style-type: none"> <li>• Removal of SO<sub>x</sub> and NO<sub>x</sub> over coal/petroleum derived activated carbon</li> <li>• Utilization of bituminous coal for water treatment</li> <li>• Production of carbon foams from pitch</li> <li>• Production of activated carbon for CO<sub>2</sub> removal from coal-derived pitch/polymer</li> <li>• Development of a sulfur-based approach to making premium carbon products from coal</li> </ul>
<i>Cokes and pitches</i>	<ul style="list-style-type: none"> <li>• Production of cokes and pitches as feedstocks for making carbon products</li> <li>• Production of needle coke</li> <li>• Catalytic extraction of coal to make highly oriented cokes</li> </ul>
<i>Chemicals</i>	<ul style="list-style-type: none"> <li>• Production of new products from the F-T process: chemicals to enhance lubricity and energy content of F-T jet/diesel fuels</li> <li>• Production of CO and CO<sub>2</sub>-free hydrogen and carbon nanotubes</li> </ul>

The Polygeneration R&D portion of the Hydrogen from Coal Program resides mainly with two consortia – the Consortium for Premium Carbon Products from Coal (CPCPC) and the Consortium for Fossil Fuel Science (CFFS). These organizations have been performing fundamental and laboratory-scale R&D for many years in a university-based structure that also includes government/industry advisory boards. During the course of their existence they have supported many students who have moved on to important positions in industry, government, and academia and published a large number of papers in major scientific journals. Several of the senior researchers have received awards through their sponsored research, including the prestigious Storch Award, bestowed annually by the American Chemical Society to a researcher who has made significant contributions in the field of fuel chemistry.

In 2003, the consortia were advised to focus their research more toward investigating technologies that will facilitate the introduction of the hydrogen economy. Rather than the previous emphasis on research to produce fuels strictly as replacements for petroleum-based fuels in conventional and advanced engines, the researchers were directed to focus more on strategies that produce reformable hydrogen-rich fuels for fuel cell-powered vehicles and stationary power supply units in alignment with the Program's Alternative Pathway. With the subsequent inclusion of Polygeneration in the Program, it provided the consortia with the opportunity to incorporate research on many novel approaches to enhance the economics of hydrogen from coal plants. This new direction includes the necessity of developing research paths that limit GHGs and other emissions from their advanced, coal-based technologies.

### **4.3.3. Technologies – Polygeneration**

The following R&D elements are contained in the Polygeneration portion of the Program and are listed by the section in which they are discussed:

4.3.3.1 High-value carbon products

4.3.3.2 Cokes and Pitches

4.3.3.3 Chemicals

#### **4.3.3.1. High-value Carbon Products**

There are a multitude of high value carbon materials that can be produced from coal, either from a reconstituted solid or liquid extract, for example activated carbon for water treatment. The applied research resides within the CPCPC and is industry-driven, with more than 40 member companies. Members companies include anthracite and bituminous coal producers, manufacturers of specialty carbon and graphite products, activated carbon producers, municipally owned water treatment facilities, anthracite filter media producers, carbon fiber and composite producers, aluminum producers, carbon black and coal tar pitch producers, battery manufacturers, and coal-fired electric utilities. Industrial partners identify, select, and partially fund projects that they deem as having potential for producing competitively priced premium carbon products from coal or coal-derived feedstocks to enhance the profitability of hydrogen from coal production facilities.

#### **4.3.3.2. Cokes and Pitches**

The Coal Extraction Program at West Virginia University is exploring the use of coal extract to make binder pitch and impregnating pitch for manufacturing graphite electrodes for electric-arc steelmaking furnaces, and binder pitch for manufacturing anodes for aluminum reduction cells. In addition, the coal extract is being used as a raw material to make specialty cokes for carbon product manufacture. These

cokes will contain much less nickel and vanadium than the petroleum cokes that they would replace, which should reduce their catalytic loss in processing.

#### 4.3.3.3. Chemicals

The CFFS, a five-university research consortium, is conducting a basic research program focused on developing innovative and economical technologies for producing hydrogen and hydrogen-rich liquid fuels and chemicals. Multiple professors and graduate and post-doctoral students from each of the five universities participate in the program. Recent research on chemicals production emphasizes novel techniques to enhance the energy (hydrogen content) of liquid fuels and methods to produce hydrogen with no carbon emissions by incorporating the carbon in carbon nanotubes as the by-product of hydrogen production. These nanotubes can be sold as a value-added product for various uses or simply stored as a permanent carbon sequestration option.

### 4.4. Storage

In FY2008, the Hydrogen from Coal Program concluded its research activities in onboard hydrogen storage. Initial activities focused on hydrogen storage using carbon nanotubes, but early results did not find that commercially available samples of single-walled carbon nanotubes were able to store sufficient quantities of hydrogen to meet the targets. Although a means to improve the storage capacity by partial oxidation with CO<sub>2</sub> was found, the performance of the activated material was still insufficient to warrant further investigation. In 2005, a decision was reached to explore strategies to generate second generation metal organic frameworks (MOFs) as possible storage materials.

The studies on MOFs have demonstrated that surface area is the most useful parameter that correlates with ultimate hydrogen capacity. The research failed to produce MOFs with high surface areas and therefore high saturation capacities for hydrogen could not have been achieved. In order to compensate for this, the synthesis of new organic linkers that have more exposed edges has been proposed. This is a factor that contributes to increasing surface area, at least when considering subunits of graphene sheets. Another strategy has been to synthesize MOFs with reduced symmetry linkers in order to generate structure types that are less likely to interpenetrate. These research methods have resulted in the synthesis of seven new compounds, one of which is the highest surface area copper-based MOF reported to date.

While storage activities in the Hydrogen from Coal Program have concluded, research in onboard storage systems is still being performed at DOE by the EERE Hydrogen, Fuel Cell & Infrastructure Technologies Program. Information on the DOE goals and technical targets for onboard hydrogen storage can be found in the *Hydrogen, Fuel Cell & Infrastructure Technologies Program's Multi-year Research, Development and Demonstration Plan: Planned Program Activities for 2005–2015*.

## 4.5. Utilization

Hydrogen and hydrogen-natural gas blends may be used directly as a fuel for advanced stationary and transportation engines. This approach to supplemental fueling with hydrogen represents a beneficial nearer-term, low-emission strategy that could result in an acceleration of hydrogen demand. Further, this approach provides a bridge to future fuel cell use in transportation applications, and is in concert with the goals of the DOE FreedomCar Program. Blending hydrogen with natural gas and its use in advanced engine types, such as homogenously charged compression ignition (HCCI) engines, could enable a new, low-emission demand for hydrogen. Conceptually, as the hydrogen infrastructure expands, these same engine systems, with further retrofits and refinements now being developed, could utilize 100 percent hydrogen. With 100 percent hydrogen utilization, lean burning may provide ultra-low NO<sub>x</sub> emissions requiring no after-treatment NO<sub>x</sub> technology. Further, with no fuel-based carbon and reduced oil consumption via a future suitable combination of engine design and oil formulation, oxidation after-treatment may not be required. Complete elimination of after-treatment would provide economic and performance benefits.

Natural gas has become the fuel of choice for many transit vehicle operators, providing emission benefits in certain applications. However, when compared to conventional diesel fuel emissions of primary pollutants and greenhouse gases, natural gas may not provide the levels of advantage that were initially anticipated; in some fleets that have been studied, the emissions actually can be greater. One study of natural gas-fueled heavy-duty vehicles indicated that these vehicles produced higher CO<sub>2</sub>-equivalent tailpipe emissions than the diesel-fueled vehicles<sup>23</sup>. There is room for improvement, potentially through displacement of some of the natural gas with hydrogen.

Combustion of mixtures of hydrogen with natural gas allows for leaner operation at lower combustion temperatures leading to lower NO<sub>x</sub> emissions than use of natural gas alone, while providing enhancements to the combustion process that permit recovery of the power and energy consumption penalties associated with natural gas. Further, the displacement of fuel carbon via hydrogen addition reduces CO, CO<sub>2</sub>, and unburned hydrocarbon emissions. Two broad areas of research need to be addressed: 1) optimizing the ratio of hydrogen-to-methane in the fuel mixture based on emissions and engine performance, and coordinated with research being performed on delivery and storage of hydrogen/methane mixtures; and 2) computational and laboratory research on the use of hydrogen/methane mixtures in advanced engines that offer step-out advantages in emissions and performance.

In summary, this activity may enable hydrogen from coal to be delivered along with natural gas and used in internal combustion engines, thus assisting the nation in its transition from liquid fuels to hydrogen with incipient emission reduction benefits.

### 4.5.1. Goal and Milestones – Utilization

**Goal:** Complete the development of hydrogen and hydrogen-natural gas mixture engine modifications and operations by 2010.

**Milestones:**

- By the end of 2010, successfully complete research to modify and optimize advanced engine types fueled by hydrogen and/or hydrogen-natural gas mixtures.

---

<sup>23</sup> Nyland, et al., VTT (Finland), *Transit Bus Emissions Study: Comparison of Emissions from Diesel and Natural Gas Buses*, p. 52, Oct. 15, 2004.

- Examine and report on the feasibility of modified and optimized advanced engine types fueled by hydrogen and/or hydrogen-natural gas mixtures.

#### 4.5.2. Activities – Utilization

Previous activities have demonstrated a novel, laser-based ignition system for hydrogen spark ignition engines. This technology offers the potential for further extension of the lean misfire limit and reduced NO<sub>x</sub> emissions. Table 17 lists the current utilization projects that are part of the Hydrogen from Coal Program.

**Table 17. Relevant Current RD&D Activities of the Program**

Category	Technology
<i>Fuel and engine development and optimization</i>	<ul style="list-style-type: none"> <li>• Optimize hydrogen-natural gas mixture composition and utilization through laboratory studies of spark ignition engine operation.</li> <li>• Evaluate hydrogen-natural gas blends as a fuel for conventional natural gas engines.</li> <li>• Evaluate the suitability of hydrogen supplementation for operating a natural gas engine at ultra-lean conditions.</li> <li>• Confirm the feasibility of using hydrogen-natural gas blends to improve performance, efficiency, and emissions of an HCCI engine.</li> </ul>

#### 4.5.3. Technologies – Utilization

##### 4.5.3.1. Advanced Engine Types

Fuel cells are the optimal choice for utilization of hydrogen in transportation and stationary applications. However, fuel cell technology for the transportation sector has to overcome significant technical and economic barriers in order to establish a market. The modification and optimization of current engines, as well as advanced engine types (e.g., HCCI engines), may provide a nearer-term market for hydrogen until fuel cells are advanced to the point of commercial viability.

Hydrogen used in advanced engines can achieve very low emissions. The NO<sub>x</sub> emissions are reduced due to the lean-burn, low-temperature nature of the combustion process. Carbon-based emissions (CO<sub>2</sub>, CO, unburned hydrocarbons) are present in low concentrations but may be further reduced via reduction of engine oil consumption. Research is needed to develop and optimize advanced engines for hydrogen use to minimize emissions of NO<sub>x</sub> and lube oil consumption, while maximizing the distance traveled by vehicles between refueling trips.

#### 4.5.4. Technical Guidelines – Utilization

The technical guidelines in Table 18 represent the status of the technology after completion of R&D, and include demonstration of the technology in heavy-duty advanced engines. The timing of the RD&D is provided in the Gantt charts in Figure 11.

**Table 18. Hydrogen Utilization Technical Guidelines for Heavy Duty Engines**

Performance Criteria	Units	2007 Target
Total hydrocarbons	g/bhp-hr	20
Non-methane hydrocarbons	g/bhp-hr	0.05 <sup>a</sup>
NO <sub>x</sub>	g/bhp-hr	0.5 <sup>a</sup>
CO	g/bhp-hr	5.0
CO <sub>2</sub>	g/bhp-hr	330 (not regulated)
PM	g/bhp-hr	0.01 <sup>a</sup>
Efficiency	-	40% thermal efficiency (unregulated)

<sup>a</sup> Based on 2007–2010 EPA on-highway heavy-duty engine emission standards.

As an example of regulations being proposed for clean light duty vehicles, Table 19 shows the California Low-emission Vehicle Regulation including LEV (Low Emission Vehicles), ULEV (Ultra-low Vehicle Emissions), and SULEV (Super-ultra-low-emission vehicles). These regulations can be used as guidelines for ICE light duty hydrogen-compressed natural gas (HCNG) and hydrogen engines.

**Table 19. LEV II Exhaust Mass Emissions Standards for New 2005 and Subsequent Model LEVs, ULEVs and SULEVs for Passenger Cars, Light Duty Trucks**

Vehicle Type	Durability	Vehicle Emission Category	NMOG (g/mi)	Carbon Monoxide (g/mi)	Oxides of Nitrogen (g/mi)	Formaldehyde (mg/mi)	Particulates (mg/mi)
All PCs / LDT 8,500 lbs or less	50,000	LEV	0.075	3.4	0.05	15	n/a
		LEV Option 1	0.075	3.4	0.07	15	n/a
		ULEV	0.04	1.7	0.05	8	n/a
	120,000	LEV	0.09	4.2	0.07	18	0.01
		LEV Option 1	0.09	4.2	0.1	18	0.01
		ULEV	0.055	2.1	0.07	11	0.01
		SULEV	0.01	1	0.02	4	0.01

Source: California Low-Emissions Vehicle Regulations, Amended February 2007, Page 37.

CNG and HCNG, when used in light duty vehicles, could provide air emissions that are consistent with the requirement of the California standards. Table 20 shows an example of emission results for a Ford F150, which can be used as a guideline.

**Table 20. Ford 150 Emission Results (LDV)**

<b>Fuel</b>	<b>Units</b>	<b>NMHC</b>	<b>CO</b>	<b>NOx</b>
HCNG	g/mile	0.018	0.251	0.084
Gasoline	g/mile	0.115	1.551	0.167
CNG	g/mile	0.023	0.567	0.110

Source: Kirk Collier, Collier Technologies, presentation at 2004 DOE Hydrogen, Fuel Cells & Infrastructure Technologies Program Review, entitled “Hydrogen and Natural Gas Blends; Converting Light and Heavy Duty Vehicles” May 2004, PowerPoint slide entitled “Emissions Results LDV, Ford F150.”

#### 4.5.5. Technical Barriers – Utilization

**A. High Cost.** The cost of modifying engines to operate on hydrogen or hydrogen-natural gas mixtures must be evaluated. If performance and cost are competitive with current technologies, engines that operate on hydrogen or hydrogen-natural gas mixtures may be a plausible interim option until fuel cell technology is fully developed.

**B. Lack of Optimized Design and Operation.** The low heating value of a hydrogen and/or hydrogen-natural gas mixture will require adjustments in the operation and design of engines. Consumption of engine lubricating oil must be addressed to achieve minimum carbon-based emissions for 2015 without oxidation catalyst.

#### 4.5.6. Technical Task Descriptions – Utilization

Table 21 describes the tasks for development of hydrogen utilization technologies.

**Table 21. Tasks for Hydrogen Utilization Technologies**

<b>Task Number</b>	<b>Task Description</b>	<b>Barriers Addressed by Task</b>
1	<ul style="list-style-type: none"> <li>• Modify and optimize advanced engine systems to operate on hydrogen or hydrogen-natural gas mixtures.</li> <li>• Demonstrate optimized engines in vehicles or stationary power systems at small scale.</li> <li>• Perform 1,000-hour tests to determine impact on engine life and durability.</li> <li>• Evaluate and compare the emissions and economics of advanced engines operating on hydrogen or hydrogen-natural gas mixtures to conventional technologies.</li> </ul>	A, B

## 5. Implementation Plan

The Hydrogen from Coal Program was initiated in FY 2004 as a component of the overall DOE Hydrogen Program, and supports OCC's goals to develop technologies that would enable near-zero emissions coal facilities. The Program is in an operational mode, having initiated RD&D activities by requesting research proposals and selecting project performers. Continued execution and development of the Hydrogen from Coal Program requires proper management controls to ensure that the program is progressing toward its goals and objectives.

### 5.1. Coordination with Other DOE/Federal Programs (Associated Programs): Jointly Funded Projects

The successful development of low-cost, affordable hydrogen production from fossil fuels coupled with sequestration of CO<sub>2</sub> is dependent on technologies being developed in a number of ongoing associated RD&D programs within FE and NETL. These technologies are needed for:


- CO<sub>2</sub> capture and sequestration.
- Advanced coal gasification, including feed handling systems.
- Efficient gasifier design and materials engineering.
- Advanced synthesis gas cleanup technologies.
- Advanced membrane separation technology to produce a lower-cost source of oxygen from air.
- Fuel cell modules that can produce electric power at coal-fired integrated gasification combined-cycle power plants.
- Hydrogen fuel gas turbines.

In response to comments by the National Academy of Sciences, the Hydrogen from Coal Program was organizationally grouped together with the Carbon Sequestration Program to enhance coordination and collaboration with respect to carbon sequestration and hydrogen production from coal. Figure 14 shows the various programs and projects with which the Hydrogen from Coal Program will coordinate in addition to the Sequestration Program. Coordination of efforts and sharing of information and experience will help ensure the successful transition to a hydrogen energy system.

#### 5.1.1. Other Coordination Activities

The Hydrogen from Coal Program interacts with several different programs and federal organizations outside of FE. These include the overall DOE Hydrogen Program, the Hydrogen Interagency Task Force, and the International Partnership for a Hydrogen Economy (IPHE).

Figure 14. Coordination of the Hydrogen from Coal Program with Associated Programs

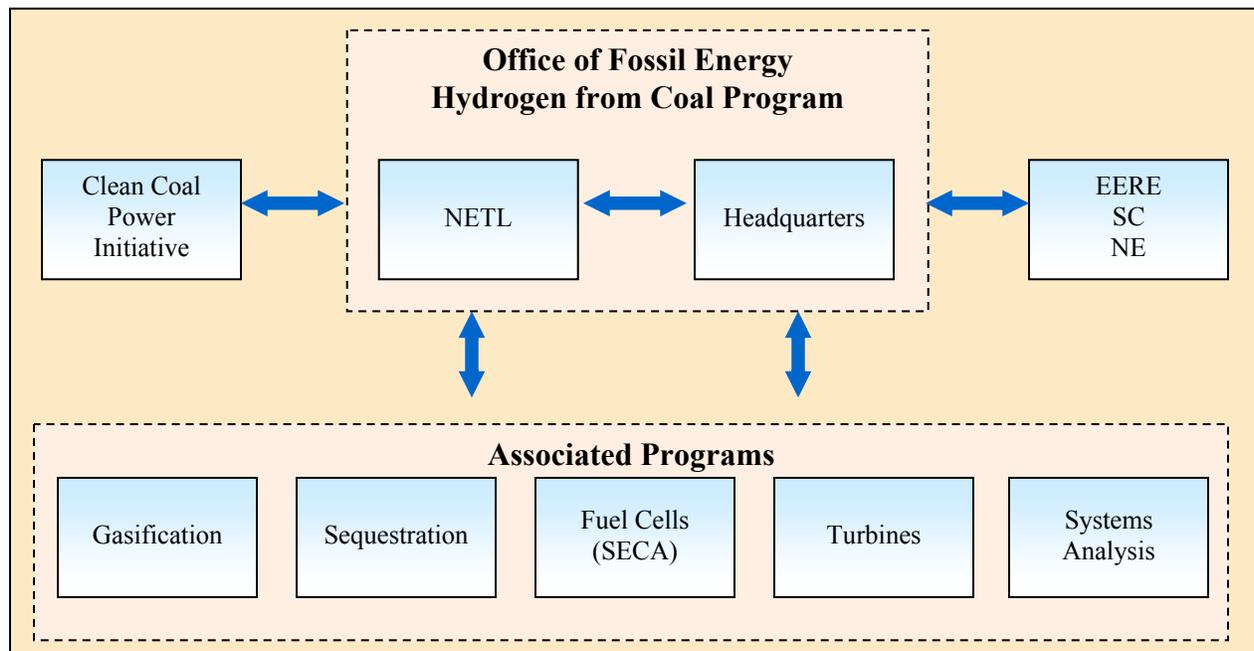

#### 5.1.1.1. Overall DOE Hydrogen Program

The Hydrogen from Coal Program has strengthened its coordination with the overall DOE Hydrogen Program by participating in joint planning meetings and the development of key strategic planning documents such as the DOE Hydrogen Posture Plan. The R&D activities sponsored by the Hydrogen from Coal Program are annually evaluated at the DOE merit review meeting. Additionally, the program contributes to DOE's Hydrogen Program Annual Progress Report, participates in monthly coordination group meeting, and is involved in other planning and management activities. It is expected that FE's participation and coordination with other hydrogen program offices will continue, to ensure that the program pathways are being pursued in an aggressive and efficient manner with minimal overlap. Coordination of efforts and sharing of information and experience will help ensure the successful transition to hydrogen energy systems.

#### 5.1.1.2. Hydrogen and Fuel Cell Interagency Task Force

The Hydrogen and Fuel Cell Interagency Task Force was established in April 2003 to fulfill a statutory requirement and to serve as a mechanism to facilitate collaboration among federal agencies engaged in hydrogen and fuel cell R&D activities. In November 2006, the Hydrogen and Fuel Cell Technical Advisory Committee (HTAC), an advisory committee to the Secretary of Energy, recommended that agency members on the Interagency Task Force be represented at the Assistant Secretary level to ensure a continued high-level of commitment and decision-making on hydrogen activities. The Assistant Secretary for Fossil Energy represents the Hydrogen from Coal Program on the Interagency Task Force. The Task Force, chaired by the Assistant Secretary of EERE, held its initial meeting in August 2007. The Task Force also includes representatives from the following organizations:

- DOE Offices of EERE; FE, Nuclear Energy, and Science
- The National Institute of Standards and Technology (NIST)
- Department of Defense (DoD)

- Department of Transportation (DOT)
- Department of Education
- Department of Agriculture (USDA)
- Executive Office of the President, Office of Science and Technology Policy (OSTP)
- General Services Administration (GSA)
- United States Postal Service (USPS)
- EPA
- NASA
- The National Science Foundation (NSF)

#### ***5.1.1.3. International Partnership for the Hydrogen Economy (IPHE)***

The IPHE was established in 2003 and consists of 16 countries and the European Union (EU). The Hydrogen from Coal Program contributes to the IPHE by attending meetings and offering its expertise on hydrogen from coal production technologies. The partners of the IPHE include nearly 3.5 billion people; account for more than \$35 trillion in Gross Domestic Product (GDP) (approximately 85 percent of the world's GDP), and more than 75 percent of electricity used worldwide; and produce greater than two-thirds of CO<sub>2</sub> emissions, while consuming two-thirds of the world's energy. The IPHE focuses its efforts on:

- Developing common codes and standards for hydrogen fuel utilization.
- Establishing cooperative efforts to advance the RD&D of hydrogen production, storage, transport, and end-use technologies.
- Strengthening exchanges of pre-competitive information necessary to build the kind of common hydrogen infrastructures necessary to allow this transformation to take place.
- Formalizing joint cooperation on hydrogen R&D to enable sharing of information necessary to develop hydrogen-fueling infrastructure.

## **5.2. Performance Assessment and Peer Reviews**

Performance assessment provides essential feedback on the effectiveness of the Program's mission, goals, and strategies. It is built into every aspect of program management and provides managers with a consistent stream of information on which to base decisions about program directions and priorities. The overall DOE Hydrogen Program has annual merit review meetings of funded projects to report progress and provide program managers the opportunity to evaluate progress toward program goals and milestones. The RD&D Plan will be annually reviewed and updated to reflect Department priorities, changes in technical and economic assumptions and accomplishments of its research activities. These annual reviews of the RD&D Plan will provide program managers the opportunity to update the goals and objectives of the Program by utilizing the most current data generated by the Program. On a periodic basis, program managers will provide RD&D direction and the project managers will conduct reviews to evaluate progress toward goals. The project managers will provide their input into the RD&D Plan by review and comment on individual projects, and their assessment of the progress being made to achieve the program goals, milestones, and targets. Formal meetings will be held with the NETL Technology Manager and HQ Program Manager on an annual basis and fact sheets will be provided on individual projects on a periodic basis.

### 5.3. Accomplishments and Progress

The Hydrogen from Coal Program has successfully transitioned from its initial start-up in FY 2004 to full operations. The Program has been actively soliciting proposals from industry, universities, and other organizations to help achieve its goals in support of the overall DOE Hydrogen Program. Currently, the program has 38 projects that are conducting research in a wide number of areas (Table 22).

**Table 22. Active Hydrogen from Coal Research Projects**

Research Area <sup>a</sup>	Number of Projects
Membrane research	11
Module scale-up	0
Membrane reactors & process intensification	5
CO <sub>2</sub> removal	1
Novel sorbent	0
Polishing filters	0
Polygeneration	5
Liquid H <sub>2</sub> carriers	9
SNG production and reforming	2
Storage	0
Utilization	5
<b>TOTAL</b>	<b>38</b>

<sup>a</sup> Complementary projects are supported by the Gasification and Sequestration Programs.

#### 5.3.1. Technical Progress

The Hydrogen from Coal Program has been in existence since 2004, with most of its projects initiated in FY2005 and thereafter. Several of the activities undertaken by the program have produced advancements and progress in technology development as outlined in the next several paragraphs.

##### 5.3.1.1. Central Hydrogen Production Pathway

Since its inception in FY2004, the Hydrogen from Coal Program has made significant technical progress toward achieving several of its goals, milestones, and technical targets. Several of the hydrogen membrane developers' test results have shown that their membranes can achieve the Program's Central Hydrogen Production Pathway long-range 2015 flux targets.

- Eltron Research, Inc. initiated tests under water-gas shift feed streams conditions; best alloy membrane has demonstrated a H<sub>2</sub> flux rate of 411 scfh/ft<sup>2</sup>.
  - Lifetime testing reactor operated several tests to 600 hours; initial baseline membrane testing in H<sub>2</sub>/N<sub>2</sub> feed streams show stable performance at 200 scfh/ft<sup>2</sup>.
  - Down-selected catalyst tested in streams with 20 ppm H<sub>2</sub>S. Stable H<sub>2</sub> flux observed for 160 hours.
- Worcester Polytechnic Institute (WPI) achieved 359 scfh/ft<sup>2</sup> H<sub>2</sub> flux with 3-5 μm Pd/Inconel membrane at 442°C and 100 psi ΔP.

- Built engineering-scale prototype membrane (2" outer diameter, 6" length, 8.8  $\mu\text{m}$  thickness).
- Total test duration of 63 days at 450°C, 15 psi  $\Delta\text{P}$ , 80 scfh/ft<sup>2</sup> H<sub>2</sub> flux, 99.99% purity (calculates to 340 scfh/ft<sup>2</sup> H<sub>2</sub> flux under DOE flux target operating conditions).
- United Technologies Research Center (UTRC) tested five separators using PdCuTM alloy which showed increased surface stability in bench-scale tests.
  - Colloidal Pd/nano-oxide membrane shows H<sub>2</sub> flux 400 scfh/ft<sup>2</sup>

In the Central Production area of process intensification, a WGS membrane reactor is being developed by several organizations including Media and Process Technologies. Media and Process Technology, Inc.'s goal is to meet performance requirements in terms of H<sub>2</sub>/CO selectivity (50 to less than 100), hydrothermal stability (50 psia steam), and chemical stability (resistance to sulfur and hydrocarbons poison). A field test at a commercial hydrotreating facility was conducted that successfully demonstrated selectivity and chemical stability in a gas stream containing H<sub>2</sub>, hydrocarbons, H<sub>2</sub>S and ammonia.

NETL's in-house research group also conducts its own exploratory research in the areas of membranes and catalysis in support of the Central Production Pathway. Researchers have performed independent verification testing of several membranes. They have also studied the impacts of sulfur on palladium-type membranes and have shown two degradation mechanisms occur and that the concentration of gas species throughout the membrane reactor can have a critical role on membrane degradation.

Activities within delivery and infrastructure saw a hydrogen production and dispensing facility commissioned in Charleston, WV at Yeager Airport. The facility will produce, compress, store, and dispense hydrogen as a fuel source for vehicles that have been converted to run on hydrogen, as well as other types of ground equipment at the airport. Additionally, the facility will service as a research, development, test, and evaluation (RD&E) platform designed to allow new innovations in hydrogen technology to be "swapped in" and tested within the context of an operating hydrogen station. The new hydrogen-dispensing facility is the first of three that are planned along Interstate-79 from Charleston, WV to Pittsburgh, PA to demonstrate the viability of hydrogen as an alternative transportation fuel. Construction of additional facilities is planned at West Virginia University in Morgantown, WV, and Carnegie Mellon University in Pittsburgh, PA.

**Table 23. Progress toward Separation Targets**

Performance Criteria	Units	Current Status <sup>a</sup>	2010 Target	2015 Target
Flux <sup>b</sup>	ft <sup>3</sup> /hour/ft <sup>2</sup>	~220	200	300
Temperature	°C	300–400	300–600	250–500
S tolerance	ppmv	~20	20	>100
Cost	\$/ft <sup>2</sup>	<200	100	<100
WGS activity	-	N/A	Yes	Yes
ΔP operating capability <sup>c</sup>	psi	1,000 (tested)	Up to 400	Up to 800 to 1,000
Carbon monoxide Tolerance	-	Yes	Yes	Yes
Hydrogen purity <sup>d</sup>	%	>99.999	99.5	99.99
Stability/durability (years)	Years	0.9 (tested)	3	5

<sup>a</sup> Current status is based on best technology to date (2006) that meets the targets under laboratory conditions. Laboratory results will need to be verified at larger scales prior to commercial deployment.

<sup>b</sup> For 100 psi ΔP (hydrogen partial pressure basis).

<sup>c</sup> ΔP = total pressure differential across the membrane reactor.

<sup>d</sup> Polishing filters may be needed downstream of the separation system in order to remove final traces of CO, sulfur, and other impurities to meet PEM fuel cell requirements. These targets exclude the effect of polishing filters.

*\* Technical targets are for membrane types described previously; research that is currently supported by FE and NETL Research on other membranes is not precluded if the potential flux, cost, and tolerance to impurities are promising. Research also is encouraged on advanced solvent and adsorption technologies to separate hydrogen. Reverse selective systems that separate CO<sub>2</sub> also are promising. The technical targets for hydrogen membranes relate to hydrogen from coal technology in which ΔP will be around 100 psi, and the membrane will require resistance to contaminants (CO and H<sub>2</sub>S). Technical targets for hydrogen membranes that are included in the EERE HFCIT RD&D Plan are for systems that operate at lower ΔP and have less contaminants.*

### 5.3.1.2. Alternate Hydrogen Production Pathways

Progress continues to be made in the Alternate Hydrogen Production Pathway. RTI completed Phase I of the project entitled "Co-production of SNG and Electricity via Catalytic Coal Gasification," having constructed and operated a high-pressure bench-scale gasification system and collected data on the distribution and composition of the product streams as a function of various operating conditions. The overall project scope seeks to convert low rank coals into SNG, electricity, and high-pressure sequestration-ready CO<sub>2</sub> in a catalytically assisted gasification process. Their results confirmed that the process has potential for directly producing a high-methane content syngas in the gasification step. Additionally, a techno-economic analysis study that incorporated yield and composition data showed that a coal-to-SNG process that incorporates the RTI approach could be cost competitive with the market for natural gas dependent upon a price on carbon credits. The base case study for a process that consumes 3,300 tons/day of sub-bituminous coal to produce 28 million standard cubic feet per day of SNG, 90 MW of net electricity, and 4,492 tons/day of sequestration-ready CO<sub>2</sub> reaches the target price of \$4.8/MMBtu with a carbon credit of \$30/ton and progressively improves as the price of carbon credits increases. Continued bench scale testing is expected to define an ideal operating envelope to maximize SNG production via the gasification step and thereby optimize the process and overall economics.

### 5.3.1.3. Systems Engineering

NETL completed a comprehensive assessment of the production of precious metals currently used in hydrogen membrane construction. The assessment showed:

- Global deposits are primarily located in South Africa and Russia.
- Less than 10 significant mining companies currently exist in the world; production is declining.
- Mining practices have significant CO<sub>2</sub> footprint.
- Commercial deployment using precious metals has potential global economic and environmental impacts.

Each of these factors could restrain the ability to deliver centrally produced hydrogen via membrane separation technologies. Considering these concerns, a competitive Funding Opportunity Announcement was released soliciting research projects that would conduct both fundamental and applied research in two topic areas. The first topic area requested research in novel, non-precious metal hydrogen separation where selected projects would explore innovative membrane materials, concepts, and strategies that separate hydrogen from a coal-based system sufficiently enough to meet the DOE 2015 targets of flux, selectivity, cost, and chemical and mechanical robustness, without the use of platinum group metals. The second area looked for novel hydrogen production methods where selected projects would study innovative techniques (e.g., thermochemical, electrochemical, photochemical, biological, organocatalysis, and adsorption) for central hydrogen production using various methods at coal-based facilities. Without the use of precious metals, such new membranes could offer the added benefit of being much less expensive.

In support of efforts in the Alternate Hydrogen Production Pathway, NETL performed a comprehensive systems analysis study entitled *Affordable Low Carbon Diesel Fuel from Domestic Coal & Biomass* (available on the NETL website at <http://www.netl.doe.gov/energy-analyses/refshelf/detail.asp?pubID=122>). This study evaluated the use of domestic coal and biomass resources to meet national objectives of energy security, economic sustainability, and the mitigation of global climate change. There are significant benefits for the United States when combining coal and biomass as feedstocks to produce fuels:

- Take advantage of carbon uptake benefits of biomass.
- Coal can offset variability of biomass supply – coal as a “flywheel.”
- Co-feeding allows biomass to take advantage of economies of scale.
- The cost of coal as a feedstock is low.
- Large coal reserve base; estimates suggest significant biomass reserves may be available.
- Liquid fuels via F-T process are zero-sulfur and have environmental benefits.

## 5.4. Communications, Outreach, and Technology Transfer

Information dissemination, communications, and outreach activities are an important and integral part of the Hydrogen from Coal Program. Hydrogen from Coal Program officials communicate the Program's mission, strategies, accomplishments, and technology capabilities to a variety of stakeholder audiences including Congress, the public, educational institutions, industry, and other government and non-government organizations. Program staffs perform the following communications, outreach, and technology transfer in addition to their other programmatic duties:

- Present technical status and program overviews at public forums.
- Manage the FE and NETL public Web site, and document and references lists.
- Manage official correspondence.
- Coordinate reviews of FE/NETL-related statements by other DOE offices and federal agencies.

The Program also participates in various conferences and workshops to exchange information with industry, government, and academia throughout the world. For example, the Program actively participates in the International Technical Conference on Coal Utilization and Fuel Systems (i.e., the Clearwater Coal Conference), National Hydrogen Association conferences, and the International Pittsburgh Coal Conference.

## 5.5. Next Steps

The Hydrogen from Coal Program has transitioned from its FY2004 initial start-up mode to an operational/implementation mode. The Program will continue to issue solicitations as appropriate, and will continue with current RD&D activities that support development and deployment of hydrogen from coal technologies to address the overall DOE Hydrogen Program goals of improved energy security and reduced GHG emissions. In the future, as hydrogen from coal technologies mature, additional input from technical and merit reviews by academia, industry, and other stakeholders will enable updates to the technical targets and sub-program elements in this RD&D Plan. The RD&D Plan will be updated periodically based on RD&D progress and subsequent go/no-go decisions and funding appropriations. Systems analysis and evaluation will continue to guide the direction of research and provide input into the Hydrogen from Coal RD&D Plan. The Program will continue collaborating with associated programs in OCC to ensure efficient utilization of resources and successful development and integration of hydrogen from coal technologies into clean coal processes. The Program also will continue to work closely with EERE, SC, and NE on coordinating activities within DOE to meet its goals and objectives.

## 6. Appendix

### 6.1. Acronyms

#### Government Agency/Office Acronyms

ANL	Argonne National Laboratory
DoD	Department of Defense
DOE	Department of Energy
DOT	Department of Transportation
EERE	Office of Energy Efficiency and Renewable Energy
EIA	Energy Information Administration
EPA	Environmental Protection Agency
FE	Office of Fossil Energy
GSA	General Services Administration
HFCIT	Hydrogen, Fuel Cells & Infrastructure Technologies Program
NASA	National Aeronautics and Space Administration
NE	Office of Nuclear Energy
NETL	National Energy Technology Laboratory
NIST	National Institute of Standards and Technology
NSF	National Science Foundation
OCC	Office of Clean Coal
ORNL	Oak Ridge National Laboratory
OSTP	Executive Office of the President – Office of Science and Technology Policy
SC	Office of Science
USDA	United States Department of Agriculture
USPS	United States Postal Service

#### General Acronyms

$\Delta P$	Delta P (change in pressure)
$^{\circ}C$	degrees Celsius
$^{\circ}F$	degrees Fahrenheit
AEO	Annual Energy Outlook
AFDU	Alternative Fuels Development Unit
APCI	Air Products and Chemicals, Inc.
AR	As received
CCPI	Clean Coal Power Initiative
CFFS	Consortium for Fossil Fuel Science
cm <sup>2</sup>	Square centimeter
EOR	Enhanced oil recovery
EPRI	Electric Power Research Institute
EU	European Union
FCV	Fuel Cell Vehicle

ft <sup>2</sup>	Square feet
ft <sup>3</sup>	Cubic feet
F-T	Fischer-Tropsch
FY	Fiscal year
g/bhp-hr	grams per brake-horsepower-hour
GDP	Gross domestic product
gge	gallons of gasoline equivalent
GTI	Gas Technology Institute
HCCI	Homogeneously charged compression ignition
HEV	Hybrid electric vehicle
HHV	Higher Heating Value
HRSG	Heat recovery steam generator
ICEV	Internal Combustion Engine Vehicle
IGCC	Integrated Gasification Combined Cycle
IPHE	International Partnership for the Hydrogen Economy
K	Degrees Kelvin
kg	Kilogram
kWh	Kilowatt-hour
LHV	Lower heating value
LNG	Liquefied natural gas
LPMEOH	Liquid Phase Methanol (plant)
MF	Metal framework
min	Minute
ml	Milliliter
MMBtu	Million Btu
MMscfd	Million standard cubic feet per day
MW	Megawatts
MWh	Megawatt-hour
MYP	Multi-year Plan
NAS	National Academies of Science
N/A	Not available
N/D	Not demonstrated
NEP	National Energy Policy
NEPA	National Environmental Policy Act
NGCC	Natural Gas Combined Cycle (power plant)
nm	Nanometer
PEM	Proton Exchange Membrane
PM	Particulate matter
ppb	Parts per billion
ppbv	Parts per billion on a volume basis
ppm	Parts per million
ppmv	Parts per million on a volume basis

PrOx	Preferential Oxidation
PSA	Pressure Swing Adsorption
psi	Pounds per square inch
psia	Pounds per square inch absolute
psig	Pounds per square inch gauge
R&D	Research and Development
RD&D	Research, Development, and Demonstration
RSP	Required Selling Price
RTI	Research Triangle Institute
SCOHS	Selective Catalytic Oxidation of Hydrogen Sulfide
SCR	Selective catalytic reduction
SNG	Substitute natural gas
SOFC	Solid Oxide Fuel Cell
SWRI	Southwest Research Institute
UNDEERC	University of North Dakota Energy and Environmental Research Center
U.S.	United States
WGS	Water-gas Shift

### Chemical Symbols/Names

Ag	Silver
Al	Aluminum
Ba	Barium
Br	Bromine
Ca	Calcium
Cl	Chlorine
CO	Carbon Monoxide
Co	Cobalt
CO <sub>2</sub>	Carbon Dioxide
COS	Carbonyl Sulfide
Cr	Chromium
Cu	Copper
DME	Dimethyl ether
F	Fluorine
Fe	Iron
Fe <sub>3</sub> O <sub>4</sub>	Synthetic Iron Oxide (Magnetite or Iron Oxide Black)
H <sub>2</sub>	Hydrogen
Hg	Mercury
H <sub>2</sub> O	Water
H <sub>2</sub> S	Hydrogen Sulfide
HCl	Hydrogen Chloride (Hydrochloric Acid)
HCN	Hydrogen Cyanide
K	Potassium

Li	Lithium
Mg	Magnesium
Mn	Manganese
Mo	Molybdenum
N <sub>2</sub>	Nitrogen
Na	Sodium
NH <sub>3</sub>	Ammonia
Ni	Nickel
NO <sub>x</sub>	Nitrogen Oxides
O <sub>2</sub>	Oxygen
P	Phosphorus
Pb	Lead
Pd	Palladium
SO <sub>2</sub>	Sulfur dioxide
SrCeO <sub>3</sub>	Strontium cerium oxide
V	Vanadium
Zn	Zinc

## 6.2. Program Contacts

### **C. Lowell Miller, Ph.D**

Director, Office of Sequestration, Hydrogen,  
and Clean Coal Fuels

U.S. Department of Energy

1000 Independence Avenue, SW

Washington, DC 20585-1290

Phone: 301-903-9451

Email: [lowell.miller@hq.doe.gov](mailto:lowell.miller@hq.doe.gov)

### **Daniel C. Cicero**

Technology Manager, Hydrogen & Syngas

Office of Coal & Power R&D

U.S. Department of Energy

National Energy Technology Laboratory

3610 Collins Ferry Road

Morgantown, WV 26507-0880

Phone: 304-285-4826

Email: [daniel.cicero@netl.doe.gov](mailto:daniel.cicero@netl.doe.gov)

### **Mark Ackiewicz**

Program Manager, Hydrogen & Clean Coal Fuels

U.S. Department of Energy

1000 Independence Avenue, SW

Washington, DC 20585-1290

Phone: 301-903-3913

Email: [mark.ackiewicz@hq.doe.gov](mailto:mark.ackiewicz@hq.doe.gov)